




# OIL ANALYSIS REPORT

Sample Rating Trend

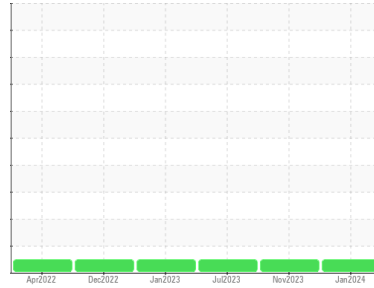

**NORMAL**



Machine Id  
**411028**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0092738</b>	GFL0092724	GFL0086425
Sample Date	Client Info		<b>03 Jan 2024</b>	03 Nov 2023	05 Jul 2023
Machine Age	hrs	Client Info	<b>5201</b>	5201	5201
Oil Age	hrs	Client Info	<b>622</b>	313	525
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>20</b>	9	28
Chromium	ppm	ASTM D5185m >20	<b>2</b>	<1	2
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>10</b>	5	17
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	1	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	<1	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	10	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	63	59
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>935</b>	1007	950
Calcium	ppm	ASTM D5185m 1070	<b>1103</b>	1173	1038
Phosphorus	ppm	ASTM D5185m 1150	<b>894</b>	1094	950
Zinc	ppm	ASTM D5185m 1270	<b>1223</b>	1386	1222
Sulfur	ppm	ASTM D5185m 2060	<b>3113</b>	3407	3363

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	3
Sodium	ppm	ASTM D5185m	<b>2</b>	2	5
Potassium	ppm	ASTM D5185m >20	<b>29</b>	9	32

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.3</b>	0.5	1.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.8</b>	7.2	10.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.8</b>	19.1	23.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	14.6	19.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.4</b>	8.3	6.6







# OIL ANALYSIS REPORT

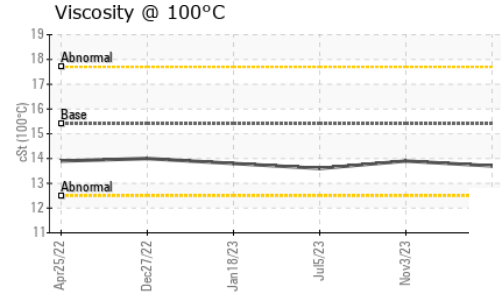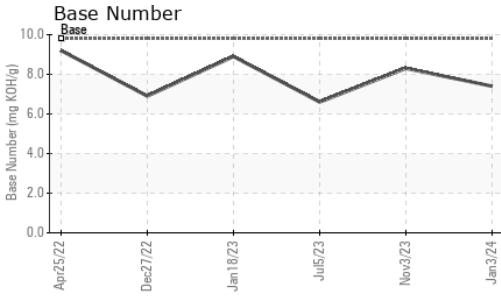

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.9	13.6

## GRAPHS

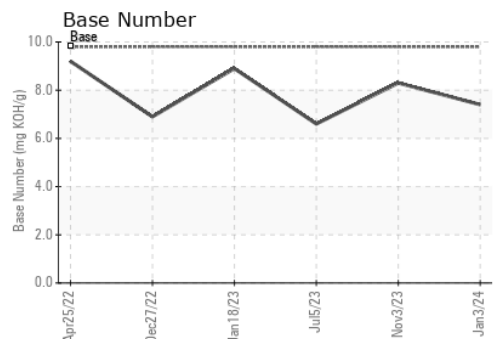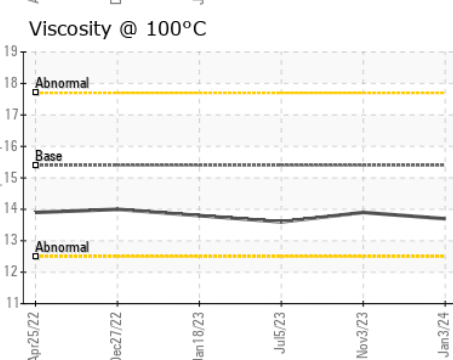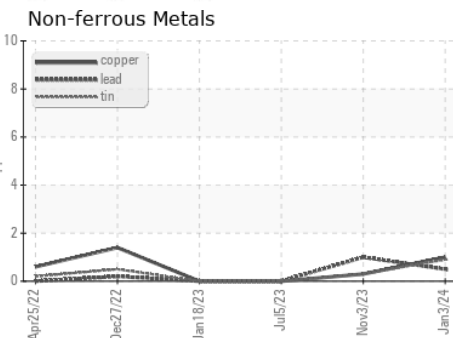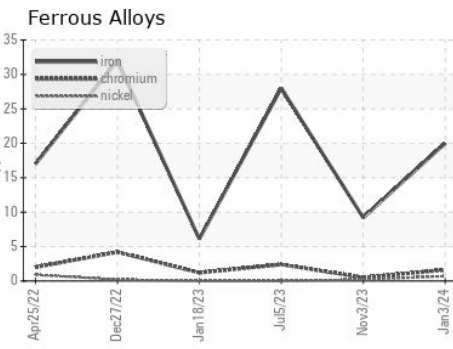

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092738 **Received** : 09 Jan 2024  
**Lab Number** : **06055216** **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821165 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 005 - Wilson/Tri-East(CNG)**  
 2810 Contentnea Road S  
 Wilson, NC  
 US 27893-8501  
 Contact: WALTER SKOKOWSKI  
 walter.skokowski@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: