


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

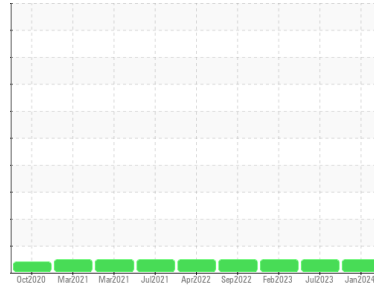

Machine Id  
**DT743**  
Component  
**Rear Differential**  
Fluid  
**CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0114736</b>	PCA0100043	PCA0090315
Sample Date	Client Info		<b>03 Jan 2024</b>	19 Jul 2023	13 Feb 2023
Machine Age	mls	Client Info	<b>201002</b>	201002	175711
Oil Age	mls	Client Info	<b>75467</b>	201002	175711
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	<b>338</b>	287	231
Chromium	ppm	ASTM D5185m >8	<b>2</b>	2	1
Nickel	ppm	ASTM D5185m >20	<b>12</b>	11	6
Titanium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>24</b>	18	11
Lead	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>181</b>	251	249
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>6</b>	9	9
Manganese	ppm	ASTM D5185m	<b>4</b>	3	2
Magnesium	ppm	ASTM D5185m	<b>96</b>	99	94
Calcium	ppm	ASTM D5185m	<b>181</b>	198	190
Phosphorus	ppm	ASTM D5185m	<b>1348</b>	1337	1287
Zinc	ppm	ASTM D5185m	<b>158</b>	160	163
Sulfur	ppm	ASTM D5185m	<b>20774</b>	24499	20644


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >230	<b>127</b>	105	94
Sodium	ppm	ASTM D5185m	<b>4</b>	4	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	4

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>LIGHT</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	0.2%
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT



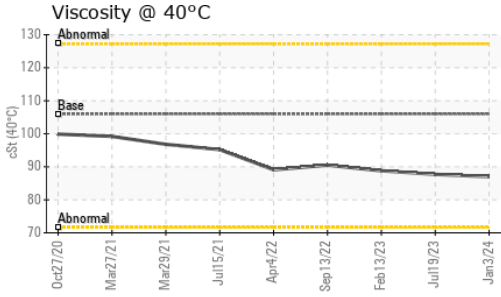


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	106	<b>87.0</b>	87.7	88.8

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

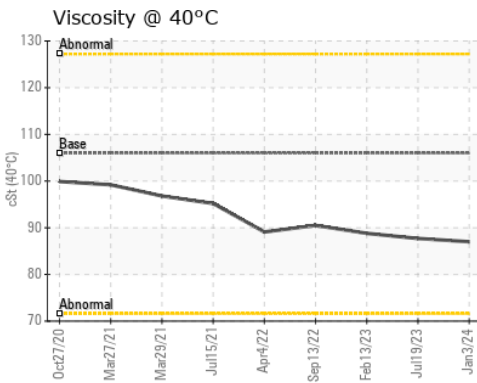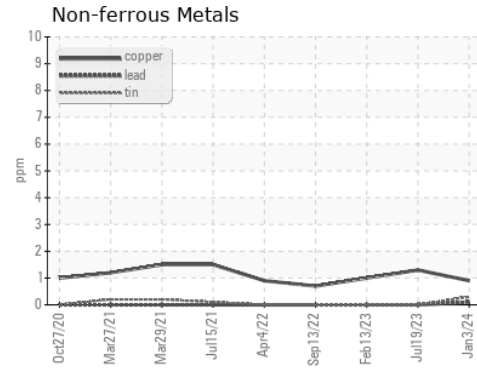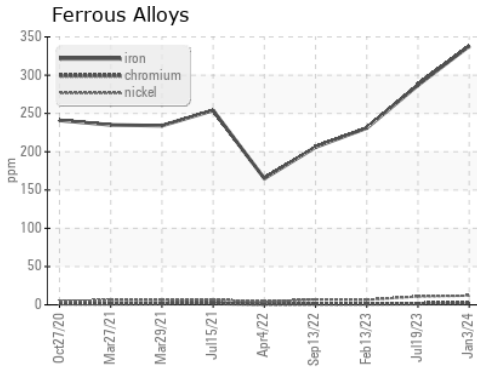

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0114736 **Received** : 09 Jan 2024  
**Lab Number** : 06055639 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821588 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**NW WHITE & CO - COLUMBIA DIVISION**  
 100 INDEPENDENCE BLVD  
 COLUMBIA, SC  
 US 29210  
 Contact: GEORGE EDWARDS  
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: