



OIL ANALYSIS REPORT


Sample Rating Trend

COOL CHEMICALS

Machine Id
2642C PETERBILT 567

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (48 QTS)

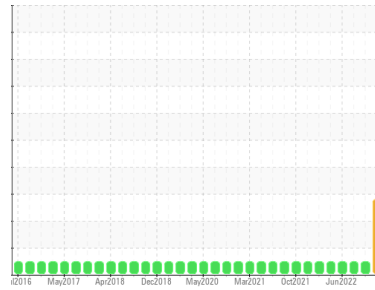

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

The aluminum level is abnormal. The lead level is abnormal.

Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103247	GFL0089329	GFL0056656
Sample Date	Client Info	05 Jan 2024	31 Jul 2023	14 Feb 2023
Machine Age	hrs	18984	17748	16767
Oil Age	hrs	2217	0	584
Oil Changed	Client Info	Changed	N/A	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	26	9	9
Chromium	ppm	ASTM D5185m	>4	2	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	▲ 20	8	2
Lead	ppm	ASTM D5185m	>30	▲ 39	3	1
Copper	ppm	ASTM D5185m	>35	3	<1	1
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	50	24	16	27
Barium	ppm	ASTM D5185m	5	0	0	2
Molybdenum	ppm	ASTM D5185m	50	72	55	51
Manganese	ppm	ASTM D5185m	0	0	<1	1
Magnesium	ppm	ASTM D5185m	560	827	619	588
Calcium	ppm	ASTM D5185m	1510	2175	1733	1404
Phosphorus	ppm	ASTM D5185m	780	1065	752	684
Zinc	ppm	ASTM D5185m	870	1345	1065	927
Sulfur	ppm	ASTM D5185m	2040	3499	3085	2511

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>+100	17	16	24
Sodium	ppm	ASTM D5185m		13	7	7
Potassium	ppm	ASTM D5185m	>20	▲ 74	28	2

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	13.1	11.3	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	31.0	24.2	21.1


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	29.4	21.2	17.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	3.0	4.7	6.9




OIL ANALYSIS REPORT


Aluminum (ppm)

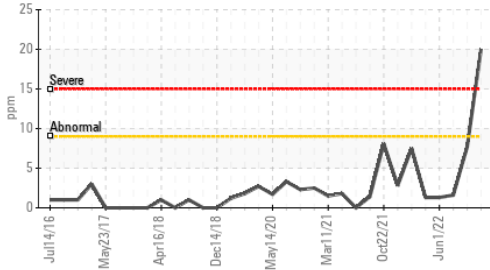


Glycol Contamination

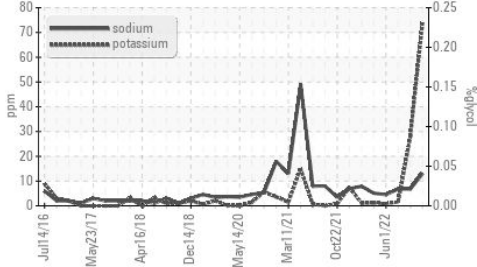


Base Number

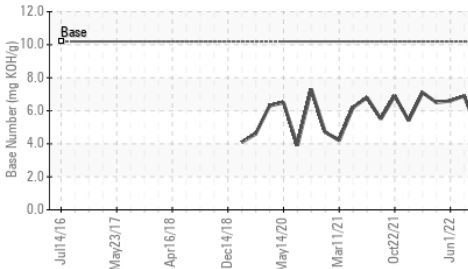

Viscosity @ 100°C

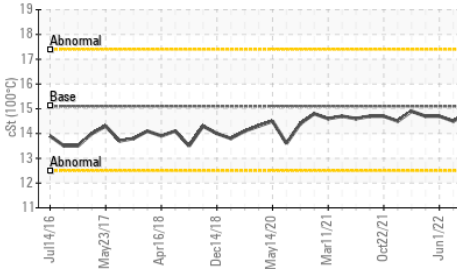

Glycol Contamination

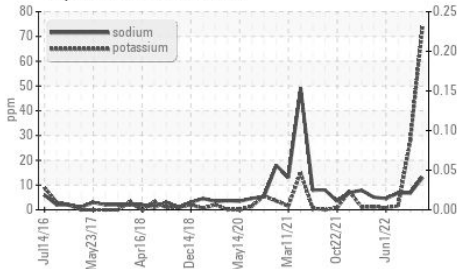

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	15.0	14.8	14.5

GRAPHS


Ferrous Alloys

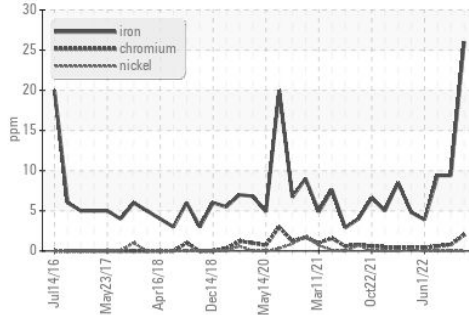


Non-ferrous Metals

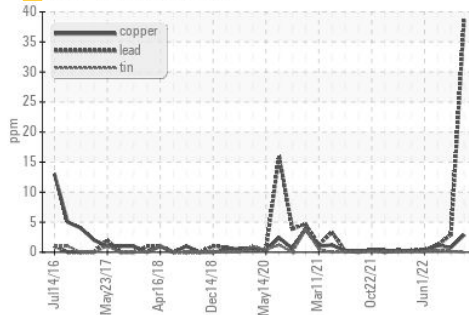

Viscosity @ 100°C

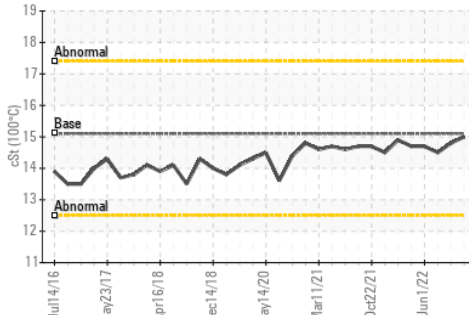

Base Number

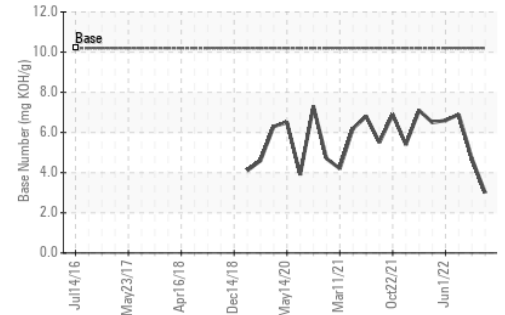

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103247 **Received** : 09 Jan 2024
Lab Number : 06055747 **Diagnosed** : 10 Jan 2024
Unique Number : 10821696 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 001 - Raleigh(CNG)

3741 Conquest Drive
 Garner, NC
 US 27529

Contact: Craig Johnson
 craig.johnson@gflenv.com

T: (919)662-7100
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)