




OIL ANALYSIS REPORT

Sample Rating Trend

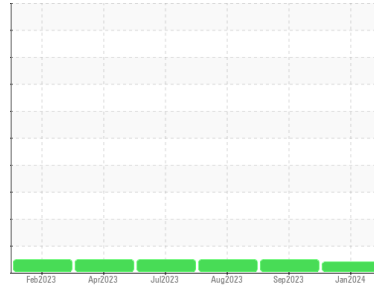

VISCOSITY



Machine Id
AUTOCAR 812012

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0109065	GFL0086203	GFL0086277	
Sample Date	Client Info	05 Jan 2024	26 Sep 2023	17 Aug 2023	
Machine Age	hrs	Client Info	4876	4274	0
Oil Age	hrs	Client Info	4876	4274	0
Oil Changed	Client Info	N/A	N/A	N/A	
Sample Status		ATTENTION	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>90	9	8	16
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	6	4	8
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	<1	<1	4
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	250	17	14	20
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	65	66	60
Manganese	ppm	ASTM D5185m		0	0	1
Magnesium	ppm	ASTM D5185m	450	731	897	813
Calcium	ppm	ASTM D5185m	3000	1178	1225	1136
Phosphorus	ppm	ASTM D5185m	1150	944	1028	892
Zinc	ppm	ASTM D5185m	1350	1132	1289	1093
Sulfur	ppm	ASTM D5185m	4250	2892	3238	3208

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	2	2	5
Sodium	ppm	ASTM D5185m	>216	3	<1	3
Potassium	ppm	ASTM D5185m	>20	12	15	20
Fuel	%	ASTM D3524	>3.0	0.5	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>6	0.3	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.9	7.2	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	17.9	18.6

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.8	13.3	14.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.3	7.1	7.2







OIL ANALYSIS REPORT

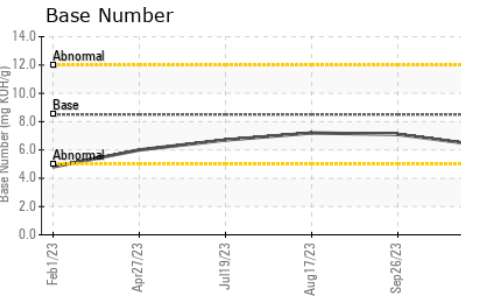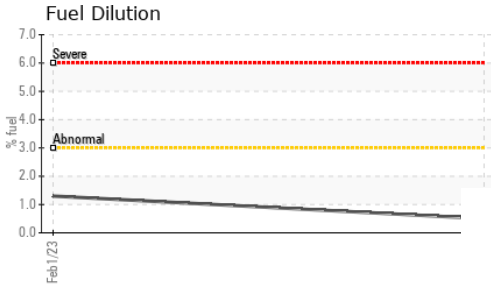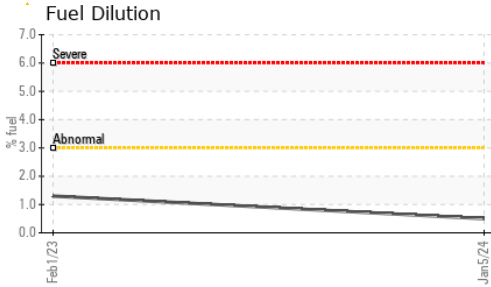

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4 ▲ 11.9	12.7	12.5

GRAPHS

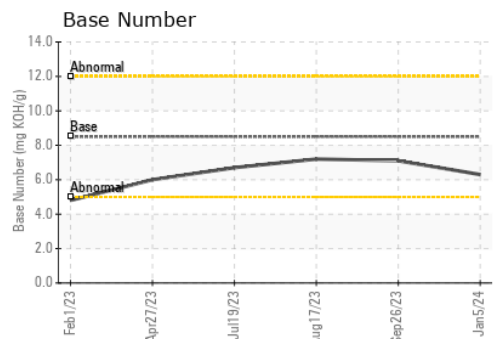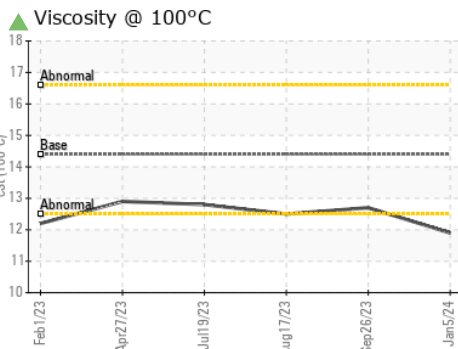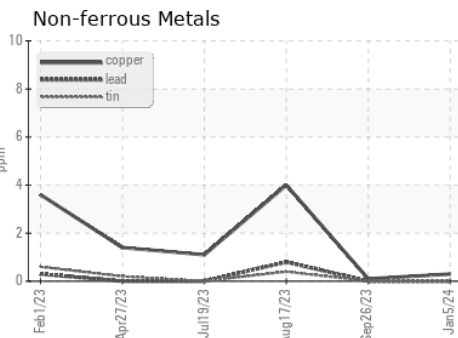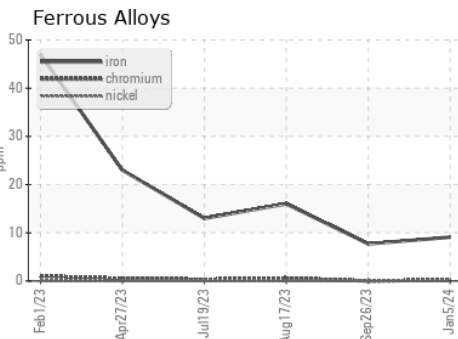

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109065 **Received** : 09 Jan 2024
Lab Number : 06055759 **Diagnosed** : 11 Jan 2024
Unique Number : 10821708 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 009 - Fairburn
 6905 Roosevelt Hwy
 Fairburn, GA
 US 30213
 Contact: Eric Jones
 erjones@gflenv.com
 T: (678)630-9927
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)