


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

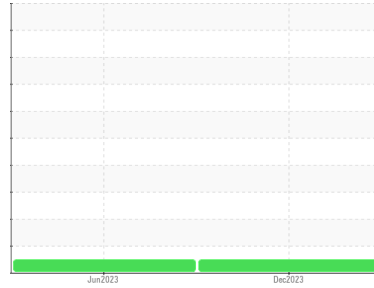

Area
(89639X) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A68027
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0110526	PCA0093551	---
Sample Date	Client Info	16 Dec 2023	26 Jun 2023	---
Machine Age	mls Client Info	201696	193468	---
Oil Age	mls Client Info	193468	193468	---
Oil Changed	Client Info	Changed	Changed	---
Sample Status		NORMAL	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	---
Water	WC Method >0.2	NEG	NEG	---
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	35	22	---
Chromium	ppm ASTM D5185m >5	<1	<1	---
Nickel	ppm ASTM D5185m >2	0	<1	---
Titanium	ppm ASTM D5185m	12	2	---
Silver	ppm ASTM D5185m >3	0	0	---
Aluminum	ppm ASTM D5185m >30	6	2	---
Lead	ppm ASTM D5185m >30	0	0	---
Copper	ppm ASTM D5185m >150	2	2	---
Tin	ppm ASTM D5185m >5	0	<1	---
Vanadium	ppm ASTM D5185m	0	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	8	3	---
Barium	ppm ASTM D5185m 0	0	0	---
Molybdenum	ppm ASTM D5185m 50	51	54	---
Manganese	ppm ASTM D5185m 0	0	<1	---
Magnesium	ppm ASTM D5185m 950	821	808	---
Calcium	ppm ASTM D5185m 1050	1196	1175	---
Phosphorus	ppm ASTM D5185m 995	926	972	---
Zinc	ppm ASTM D5185m 1180	1162	1165	---
Sulfur	ppm ASTM D5185m 2600	3194	2935	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	7	7	---
Sodium	ppm ASTM D5185m	0	<1	---
Potassium	ppm ASTM D5185m >20	11	3	---



INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.6	---
Nitration	Abs/cm *ASTM D7624 >20	6.8	10.4	---
Sulfation	Abs/.1mm *ASTM D7415 >30	17.9	22.2	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.2	18.7	---
Base Number (BN)	mg KOH/g ASTM D2896	8.3	6.8	---





OIL ANALYSIS REPORT

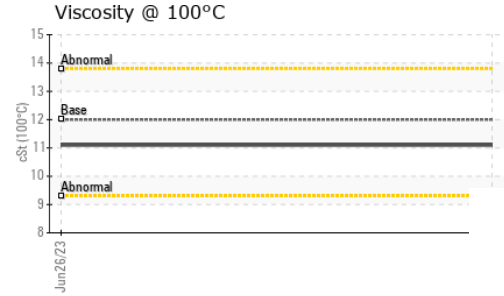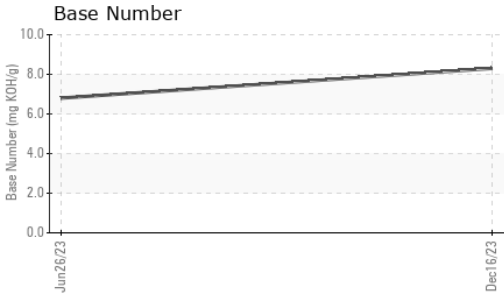

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.1	11.1	---

GRAPHS

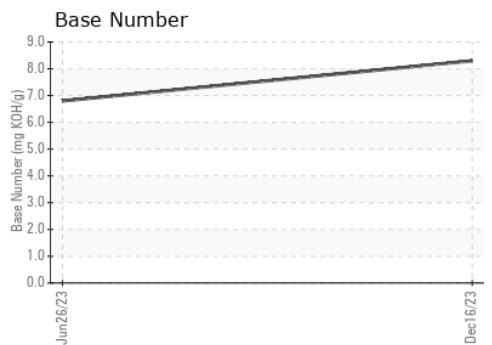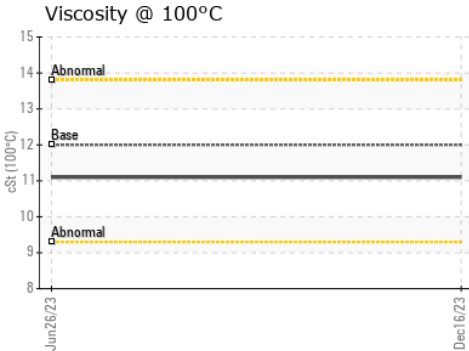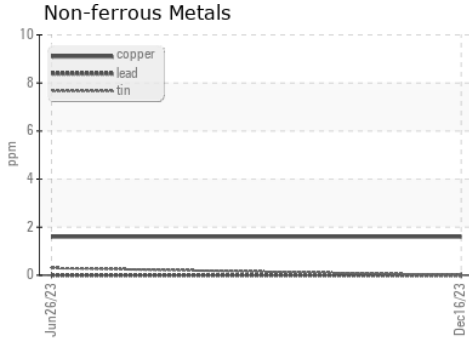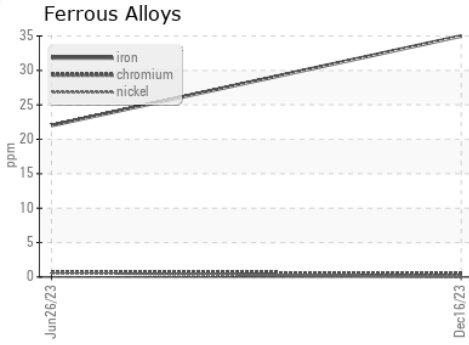

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110526 **Recieved** : 10 Jan 2024
Lab Number : **06056304** **Diagnosed** : 11 Jan 2024
Unique Number : 10822253 **Diagnostician** : Wes Davis
Test Package : FLEET

Transervice - Shop 1376 - Berkeley-Linden
 3425 Tremley Point Road
 Linden, NJ
 US 07036
 Contact: Shop 1376 Oil Analysis
 shop1376@transervice.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)