

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

 Machine Id  
**333899**

 Component  
**Diesel Engine**

 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

**DIAGNOSIS**
**Recommendation**

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION**

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>PCA0105610</b>  | ---      | ---      |
| Sample Date   | Client Info |             | <b>28 Dec 2023</b> | ---      | ---      |
| Machine Age   | mls         | Client Info | <b>12569</b>       | ---      | ---      |
| Oil Age       | mls         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | ---      | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ---      | ---      |

**CONTAMINATION**

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | ---      | ---      |
| Water  | WC Method | >0.2       | <b>NEG</b>     | ---      | ---      |
| Glycol | WC Method |            | <b>NEG</b>     | ---      | ---      |

**WEAR METALS**

|          | method | limit/base  | current | history1     | history2 |
|----------|--------|-------------|---------|--------------|----------|
| Iron     | ppm    | ASTM D5185m | >100    | <b>83</b>    | ---      |
| Chromium | ppm    | ASTM D5185m | >20     | <b>2</b>     | ---      |
| Nickel   | ppm    | ASTM D5185m | >4      | <b>&lt;1</b> | ---      |
| Titanium | ppm    | ASTM D5185m |         | <b>&lt;1</b> | ---      |
| Silver   | ppm    | ASTM D5185m | >3      | <b>0</b>     | ---      |
| Aluminum | ppm    | ASTM D5185m | >20     | <b>18</b>    | ---      |
| Lead     | ppm    | ASTM D5185m | >40     | <b>&lt;1</b> | ---      |
| Copper   | ppm    | ASTM D5185m | >330    | <b>76</b>    | ---      |
| Tin      | ppm    | ASTM D5185m | >15     | <b>&lt;1</b> | ---      |
| Vanadium | ppm    | ASTM D5185m |         | <b>&lt;1</b> | ---      |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | ---      |

**ADDITIVES**

|            | method | limit/base  | current | history1    | history2 |
|------------|--------|-------------|---------|-------------|----------|
| Boron      | ppm    | ASTM D5185m | 2       | <b>61</b>   | ---      |
| Barium     | ppm    | ASTM D5185m | 0       | <b>7</b>    | ---      |
| Molybdenum | ppm    | ASTM D5185m | 50      | <b>118</b>  | ---      |
| Manganese  | ppm    | ASTM D5185m | 0       | <b>5</b>    | ---      |
| Magnesium  | ppm    | ASTM D5185m | 950     | <b>738</b>  | ---      |
| Calcium    | ppm    | ASTM D5185m | 1050    | <b>1328</b> | ---      |
| Phosphorus | ppm    | ASTM D5185m | 995     | <b>774</b>  | ---      |
| Zinc       | ppm    | ASTM D5185m | 1180    | <b>946</b>  | ---      |
| Sulfur     | ppm    | ASTM D5185m | 2600    | <b>2893</b> | ---      |

**CONTAMINANTS**

|           | method | limit/base  | current | history1  | history2 |
|-----------|--------|-------------|---------|-----------|----------|
| Silicon   | ppm    | ASTM D5185m | >25     | <b>26</b> | ---      |
| Sodium    | ppm    | ASTM D5185m |         | <b>7</b>  | ---      |
| Potassium | ppm    | ASTM D5185m | >20     | <b>58</b> | ---      |


**INFRA-RED**

|           | method   | limit/base  | current | history1    | history2 |
|-----------|----------|-------------|---------|-------------|----------|
| Soot %    | %        | *ASTM D7844 | >3      | <b>0.7</b>  | ---      |
| Nitration | Abs/cm   | *ASTM D7624 | >20     | <b>12.3</b> | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30     | <b>22.1</b> | ---      |


**FLUID DEGRADATION**

|                  | method   | limit/base  | current | history1    | history2 |
|------------------|----------|-------------|---------|-------------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25     | <b>20.8</b> | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896  |         | <b>5.3</b>  | ---      |


# OIL ANALYSIS REPORT

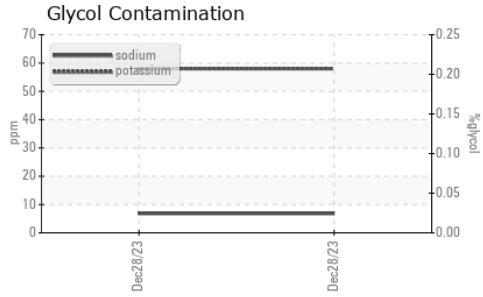










| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

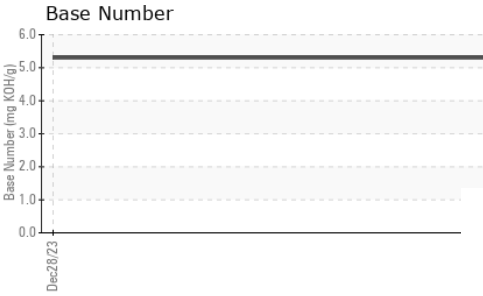

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 12.00   | 13.0     | ---      |

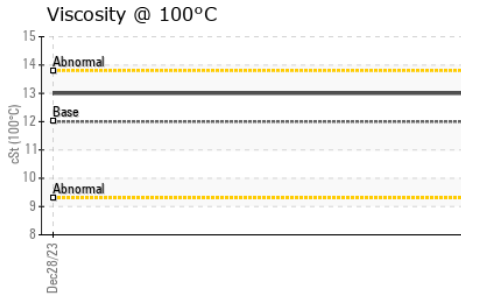

## GRAPHS

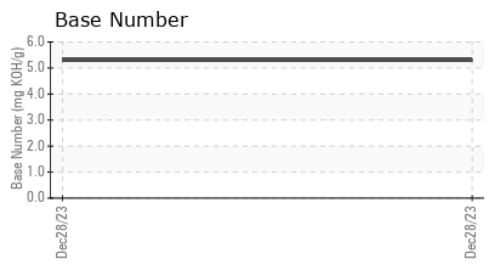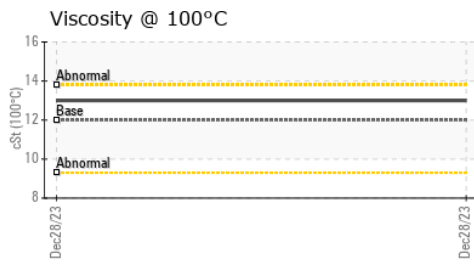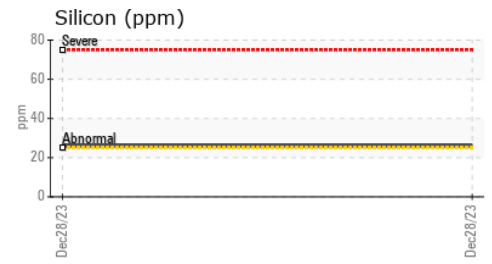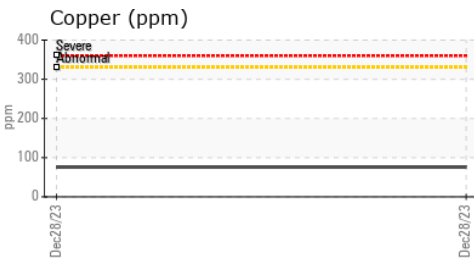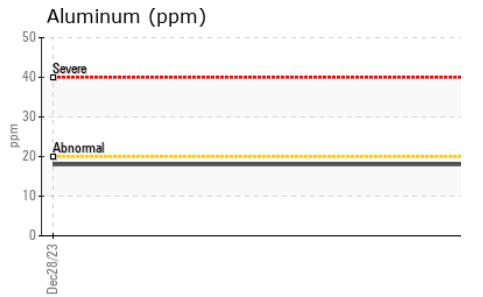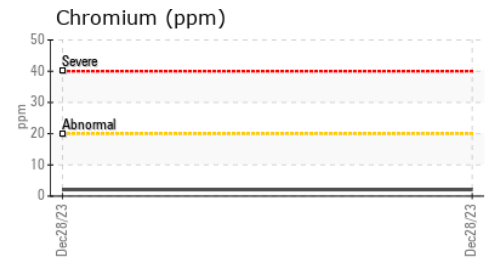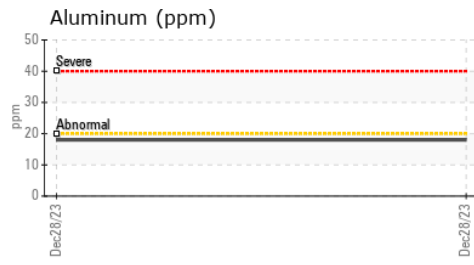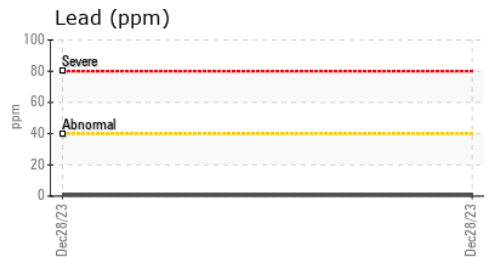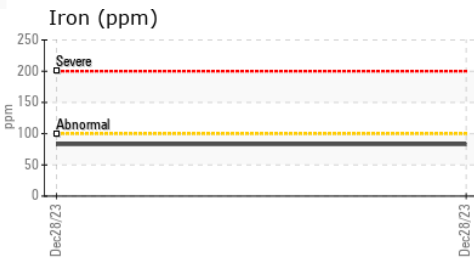

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105610 **Received** : 10 Jan 2024  
**Lab Number** : 06056439 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10822388 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #116**  
 1197 NORTH MAIN ROAD  
 VINELAND, NJ  
 US 08360  
 Contact: JOHN KEEN  
 jkeen@millertransgroup.com  
 T:  
 F: (856)696-5629

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)