


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

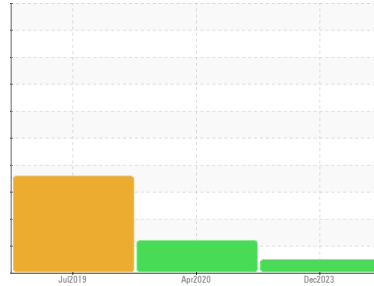

Machine Id
606331

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0087369	PCA0014301	PCA0004925
Sample Date	Client Info		22 Dec 2023	18 Apr 2020	24 Jul 2019
Machine Age	mls	Client Info	341799	77598	28023
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	ATTENTION	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	49	26	43
Chromium	ppm	ASTM D5185m >20	2	5	6
Nickel	ppm	ASTM D5185m >4	0	1	▲ 8
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >3	0	<1	<1
Aluminum	ppm	ASTM D5185m >20	9	27	51
Lead	ppm	ASTM D5185m >40	0	<1	<1
Copper	ppm	ASTM D5185m >330	11	156	▲ 906
Tin	ppm	ASTM D5185m >15	1	4	▲ 67
Antimony	ppm	ASTM D5185m	---	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	5	4	30
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	69	61	43
Manganese	ppm	ASTM D5185m 0	<1	<1	4
Magnesium	ppm	ASTM D5185m 950	993	1057	569
Calcium	ppm	ASTM D5185m 1050	1177	1158	1758
Phosphorus	ppm	ASTM D5185m 995	1079	1020	727
Zinc	ppm	ASTM D5185m 1180	1328	1203	879
Sulfur	ppm	ASTM D5185m 2600	2444	1976	1521

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	4	9
Sodium	ppm	ASTM D5185m	3	3	8
Potassium	ppm	ASTM D5185m >20	10	▲ 57	▲ 116



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.5	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	12.8	8.3	9.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	26.4	19.8	22.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	24.2	15.9	22.7
Base Number (BN)	mg KOH/g	ASTM D2896	4.5	---	---









OIL ANALYSIS REPORT

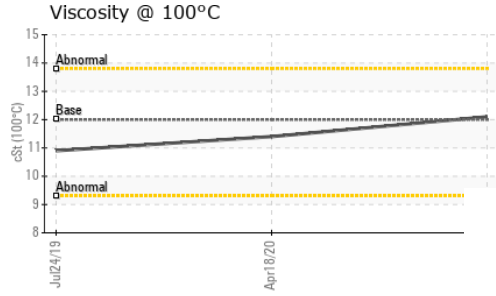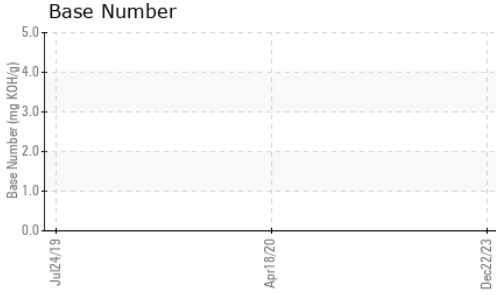

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	12.1	11.4	10.9

GRAPHS

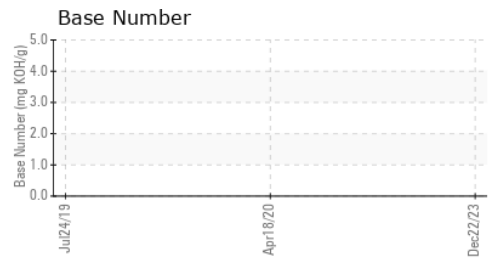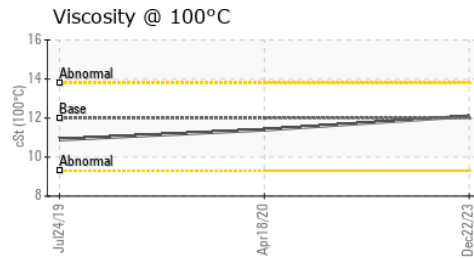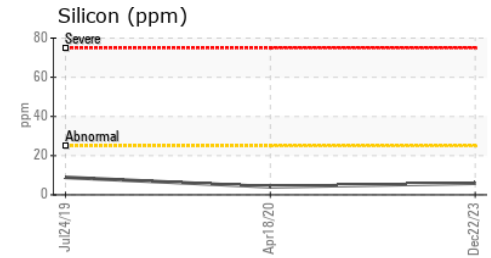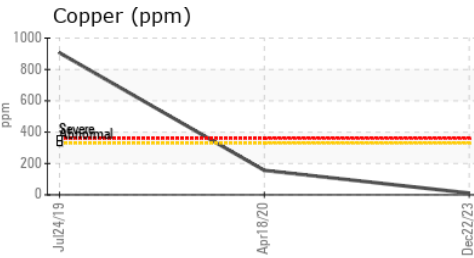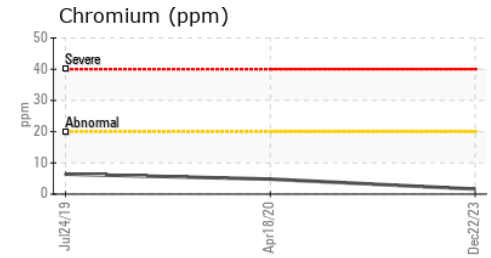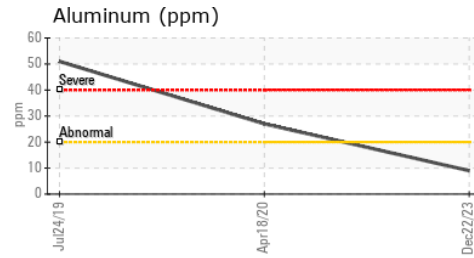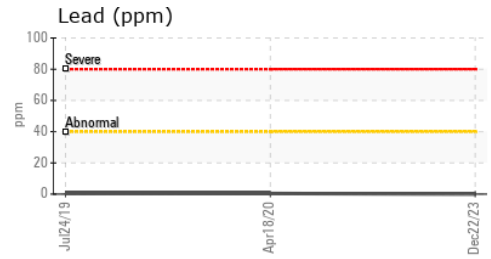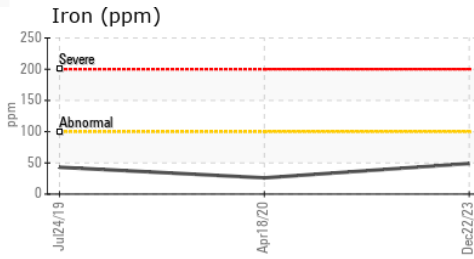

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0087369 **Recieved** : 10 Jan 2024
Lab Number : 06056442 **Diagnosed** : 11 Jan 2024
Unique Number : 10822391 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #116
 1197 NORTH MAIN ROAD
 VINELAND, NJ
 US 08360
 Contact: GARY PRICE
 gprice@millertransgroup.com
 T: (856)696-4848
 F: (856)696-5629

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)