




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**MONTGOMERY**  
 Machine Id  
**MACK 913101**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

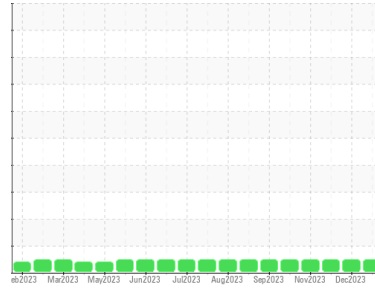

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0087970</b>	GFL0091314	GFL0091287
Sample Date	Client Info		<b>29 Dec 2023</b>	12 Dec 2023	22 Nov 2023
Machine Age	hrs	Client Info	<b>2138</b>	2043	1914
Oil Age	hrs	Client Info	<b>95</b>	557	428
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>9</b>	59	55
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	6	6
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	6	5
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	20	21
Tin	ppm	ASTM D5185m >15	<b>0</b>	2	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	2	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	69	71
Manganese	ppm	ASTM D5185m 0	<b>0</b>	2	2
Magnesium	ppm	ASTM D5185m 1010	<b>982</b>	993	1012
Calcium	ppm	ASTM D5185m 1070	<b>1072</b>	1131	1176
Phosphorus	ppm	ASTM D5185m 1150	<b>1044</b>	901	995
Zinc	ppm	ASTM D5185m 1270	<b>1236</b>	1265	1274
Sulfur	ppm	ASTM D5185m 2060	<b>3361</b>	2294	2531

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	18	17
Sodium	ppm	ASTM D5185m	<b>2</b>	7	6
Potassium	ppm	ASTM D5185m >20	<b>3</b>	17	18

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	1.5	1.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.6</b>	13.4	12.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.0</b>	26.8	25.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.9</b>	25.0	23.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.4</b>	4.7	5.2







# OIL ANALYSIS REPORT

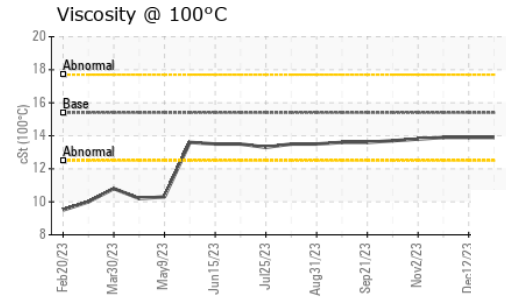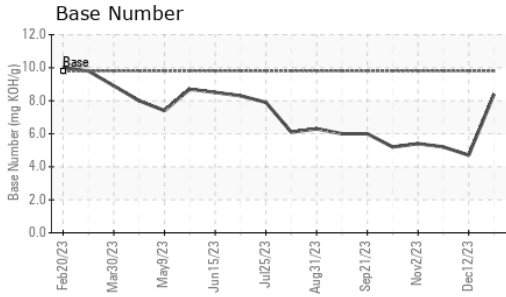

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.9	13.9

## GRAPHS

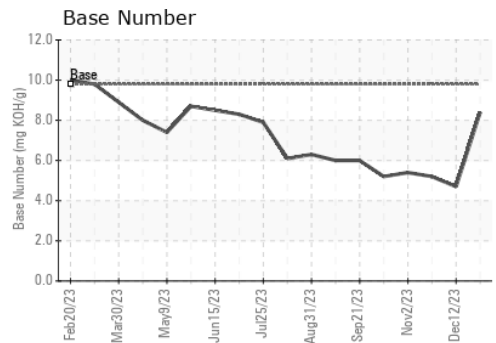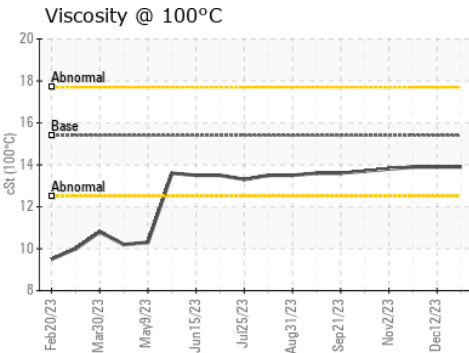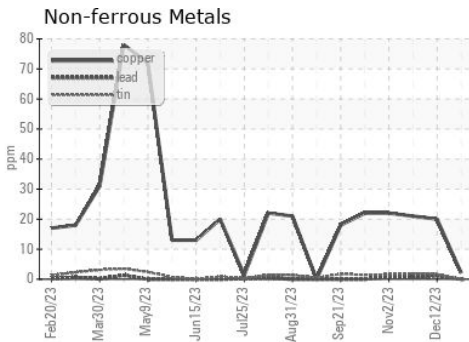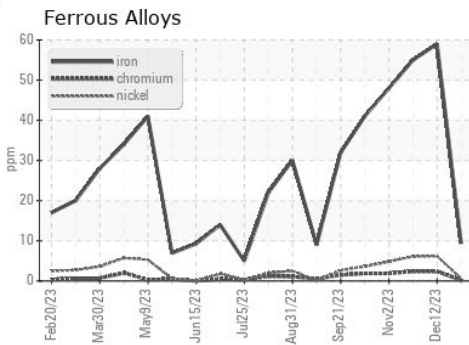

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0087970 **Received** : 10 Jan 2024  
**Lab Number** : 06057277 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10823226 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 955 - Montgomery**  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: