




# OIL ANALYSIS REPORT

Sample Rating Trend

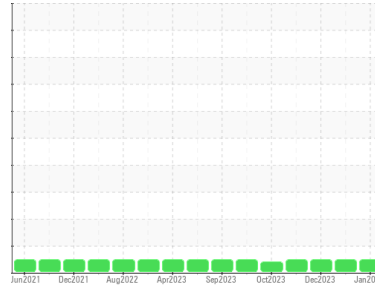

**NORMAL**



Machine Id  
**929089-205312**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0048368</b>	GFL0093563	GFL0093605
Sample Date	Client Info	<b>10 Jan 2024</b>	27 Dec 2023	05 Dec 2023
Machine Age	hrs	<b>22907</b>	22781	22693
Oil Age	hrs	<b>526</b>	400	312
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>6</b>	7	8
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>8</b>	8	6
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	3	4
Lead	ppm ASTM D5185m >40	<b>3</b>	2	1
Copper	ppm ASTM D5185m >330	<b>3</b>	2	3
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>9</b>	11	8
Barium	ppm ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm ASTM D5185m 60	<b>53</b>	61	58
Manganese	ppm ASTM D5185m 0	<b>0</b>	0	0
Magnesium	ppm ASTM D5185m 1010	<b>915</b>	950	887
Calcium	ppm ASTM D5185m 1070	<b>1105</b>	1212	1109
Phosphorus	ppm ASTM D5185m 1150	<b>975</b>	1053	931
Zinc	ppm ASTM D5185m 1270	<b>1282</b>	1230	1174
Sulfur	ppm ASTM D5185m 2060	<b>2893</b>	3112	3253

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	7	10
Sodium	ppm ASTM D5185m	<b>4</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>1</b>	<1	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>8.2</b>	7.6	7.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.9</b>	19.5	19.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.9</b>	15.3	14.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.9</b>	8.1	8.4







# OIL ANALYSIS REPORT

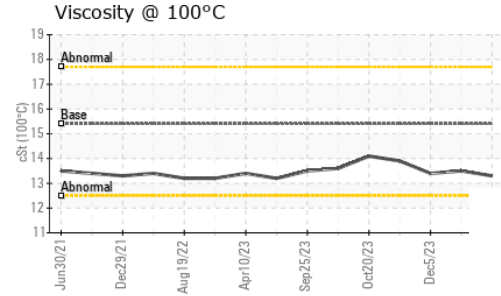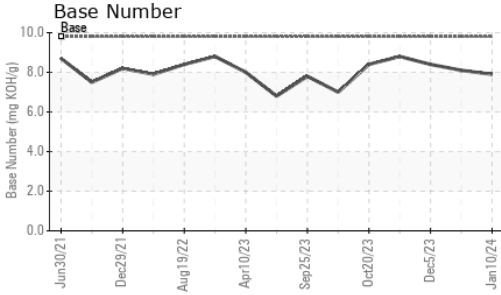

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.5	13.4

## GRAPHS

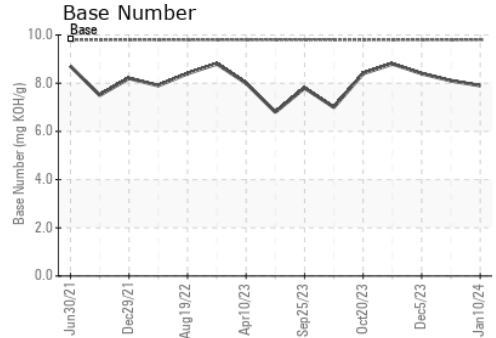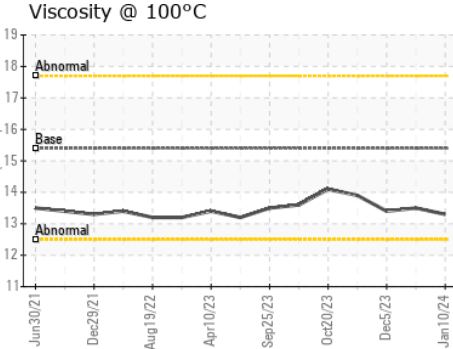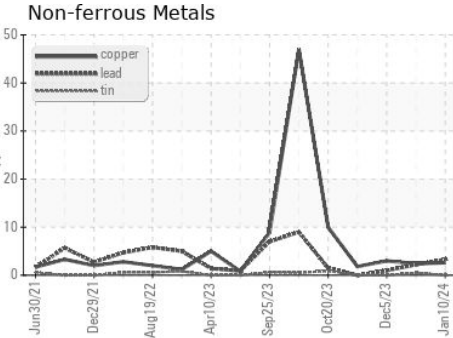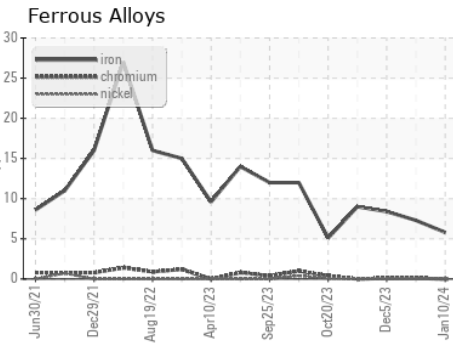

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0048368 **Received** : 11 Jan 2024  
**Lab Number** : **06057696** **Diagnosed** : 11 Jan 2024  
**Unique Number** : 10823645 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 891 - Oklahoma City Hauling**  
 1001 South Rockwell  
 Oklahoma City, OK  
 US 73128  
 Contact: Andy Smith  
 andrew.smith@gflenv.com  
 T: (405)306-1651  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)