# OIL ANALYSIS REPORT

Sample Rating Trend

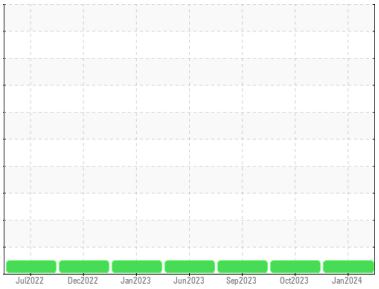


NORMAL

Machine Id
**427117**
Component
**Diesel Engine**
Fluid
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

**Recommendation**
Resample at the next service interval to monitor.

**Wear**
All component wear rates are normal.

**Contamination**
There is no indication of any contamination in the oil.

**Fluid Condition**
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Sample Number | | Client Info | | **GFL0092883** | GFL0097460 | GFL0092916 |
| Sample Date | | Client Info | | **03 Jan 2024** | 31 Oct 2023 | 08 Sep 2023 |
| Machine Age | hrs | Client Info | | **11561** | 11409 | 11076 |
| Oil Age | hrs | Client Info | | **10018** | 10018 | 0 |
| Oil Changed | | Client Info | | **N/A** | N/A | N/A |
| Sample Status | | | | **NORMAL** | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Fuel | | WC Method | >5 | **<1.0** | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | **NEG** | NEG | NEG |
| Glycol | | WC Method | | **NEG** | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Iron | ppm | ASTM D5185m | >110 | **6** | 26 | 20 |
| Chromium | ppm | ASTM D5185m | >4 | **0** | <1 | 1 |
| Nickel | ppm | ASTM D5185m | >2 | **0** | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | **0** | 0 | <1 |
| Silver | ppm | ASTM D5185m | >2 | **0** | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | **1** | 6 | 6 |
| Lead | ppm | ASTM D5185m | >45 | **2** | 8 | 4 |
| Copper | ppm | ASTM D5185m | >85 | **0** | 1 | <1 |
| Tin | ppm | ASTM D5185m | >4 | **0** | <1 | 1 |
| Vanadium | ppm | ASTM D5185m | | **0** | <1 | <1 |
| Cadmium | ppm | ASTM D5185m | | **0** | 0 | <1 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Boron | ppm | ASTM D5185m | 0 | **6** | 6 | 8 |
| Barium | ppm | ASTM D5185m | 0 | **0** | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | **56** | 64 | 63 |
| Manganese | ppm | ASTM D5185m | 0 | **0** | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | **901** | 965 | 1004 |
| Calcium | ppm | ASTM D5185m | 1070 | **1034** | 1223 | 1285 |
| Phosphorus | ppm | ASTM D5185m | 1150 | **944** | 1107 | 1075 |
| Zinc | ppm | ASTM D5185m | 1270 | **1247** | 1283 | 1314 |
| Sulfur | ppm | ASTM D5185m | 2060 | **2886** | 3017 | 3746 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Silicon | ppm | ASTM D5185m | >30 | **2** | 6 | 5 |
| Sodium | ppm | ASTM D5185m | | **2** | 6 | 5 |
| Potassium | ppm | ASTM D5185m | >20 | **4** | 15 | 15 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Soot % | % | *ASTM D7844 | >3 | **0.3** | 0.7 | 0.5 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | **7.8** | 11.8 | 9.4 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | **18.7** | 22.9 | 20.3 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | **14.6** | 18.8 | 16.0 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | **8.0** | 6.7 | 7.6 |

# OIL ANALYSIS REPORT

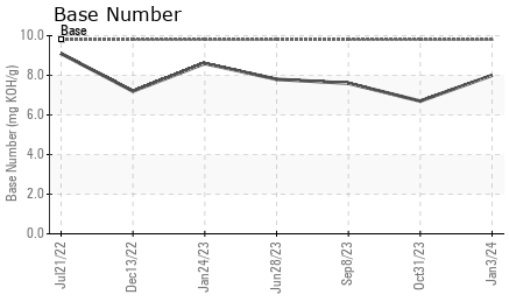


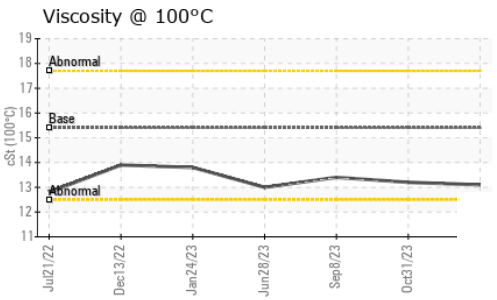


| VISUAL | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| White Metal | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Silt | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Debris | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | **NONE** | NONE | NONE |
| Appearance | scalar | *Visual | NORML | **NORML** | NORML | NORML |
| Odor | scalar | *Visual | NORML | **NORML** | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | **NEG** | NEG | NEG |
| Free Water | scalar | *Visual | | **NEG** | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|---|---|---|---|---|---|---|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | **13.1** | 13.2 | 13.4 |

## GRAPHS

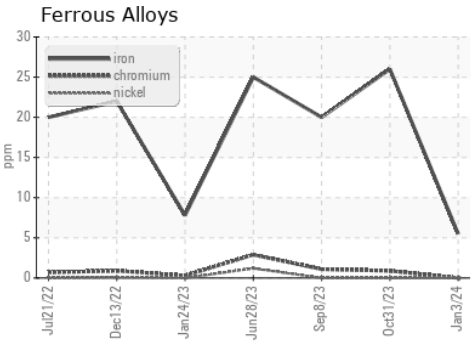


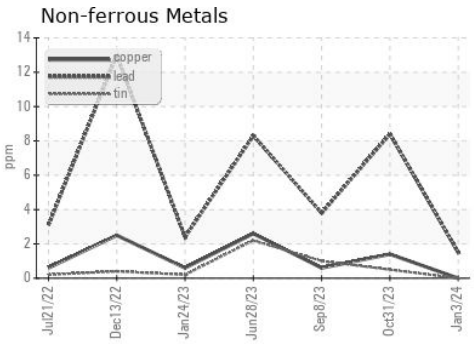


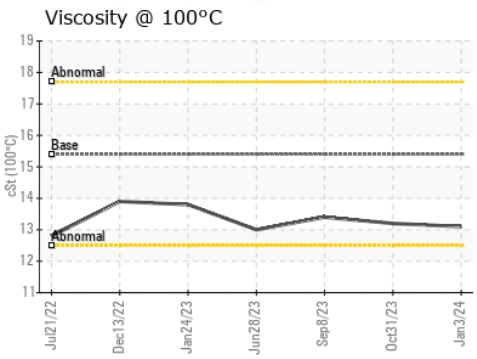


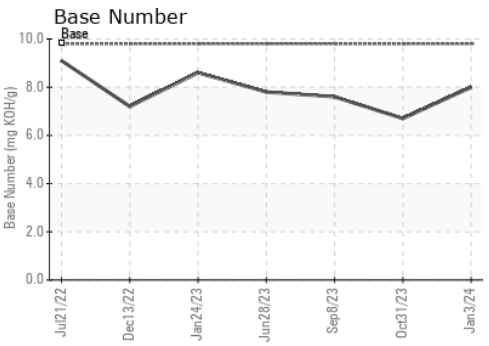


Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513
**Sample No.** : GFL0092883
**Lab Number** : 06057713
**Unique Number** : 10823662
**Test Package** : FLEET

**Recieved** : 11 Jan 2024
**Diagnosed** : 11 Jan 2024
**Diagnostician** : Wes Davis

*To discuss this sample report, contact Customer Service at 1-800-237-1369.*
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
*Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)*

**GFL Environmental - 641 - Alpena**
1241 KING SETTLEMENT RD
ALPENA, MI
US 49707
Contact: DYLAN TOLAN
dylan.tolan@gflenv.com
T: (989)854-7203
F:

Report Id: GFL641 [WUSCAR] 06057713 (Generated: 01/11/2024 15:34:25) Rev: 1

Submitted By: GFL463 and GFL641 - DYLAN TOLAN