




# OIL ANALYSIS REPORT

Sample Rating Trend

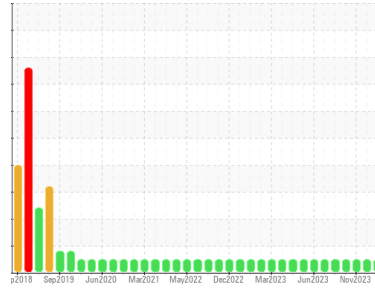

**NORMAL**



Machine Id

**2718**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (40 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0098999</b>	GFL0099001	GFL0098950
Sample Date	Client Info	<b>02 Jan 2024</b>	19 Dec 2023	30 Nov 2023
Machine Age	hrs	<b>14129</b>	14062	13928
Oil Age	hrs	<b>13453</b>	13453	13453
Oil Changed	Client Info	<b>N/A</b>	Changed	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >165	<b>5</b>	20	16
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm ASTM D5185m >150	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185m >90	<b>0</b>	<1	1
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	2	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	5
Molybdenum	ppm ASTM D5185m 60	<b>51</b>	58	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>882</b>	938	899
Calcium	ppm ASTM D5185m 1070	<b>1143</b>	1036	1105
Phosphorus	ppm ASTM D5185m 1150	<b>1006</b>	1058	1018
Zinc	ppm ASTM D5185m 1270	<b>1245</b>	1291	1190
Sulfur	ppm ASTM D5185m 2060	<b>3084</b>	2950	2909

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >35	<b>4</b>	6	5
Sodium	ppm ASTM D5185m	<b>0</b>	5	0
Potassium	ppm ASTM D5185m >20	<b>0</b>	3	4

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >7.5	<b>0.1</b>	0.4	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>5.7</b>	9.7	8.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.6</b>	21.3	20.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.4</b>	17.9	16.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.2</b>	7.0	7.3







# OIL ANALYSIS REPORT

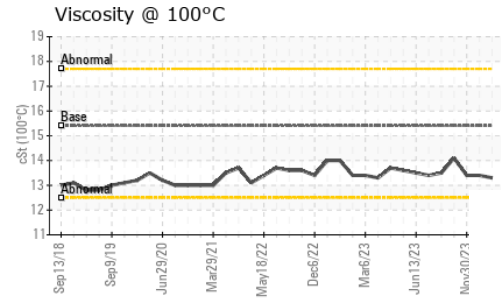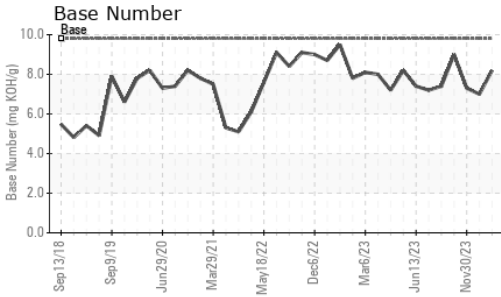

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.4

## GRAPHS

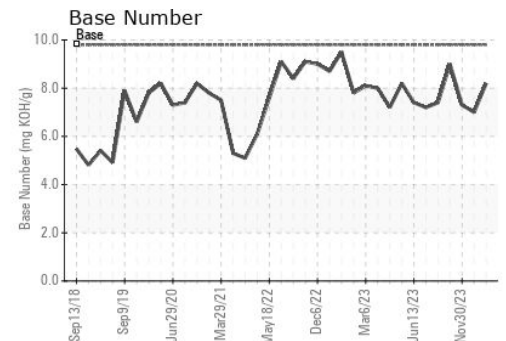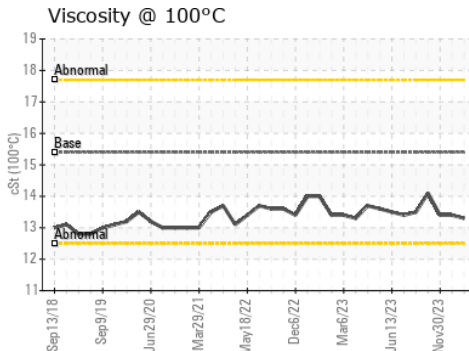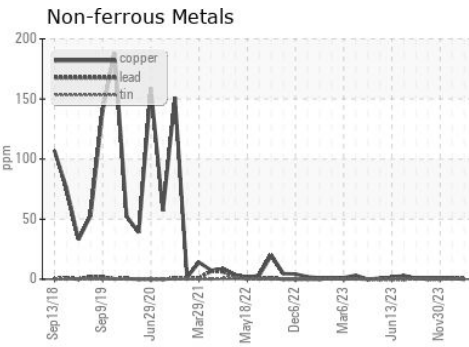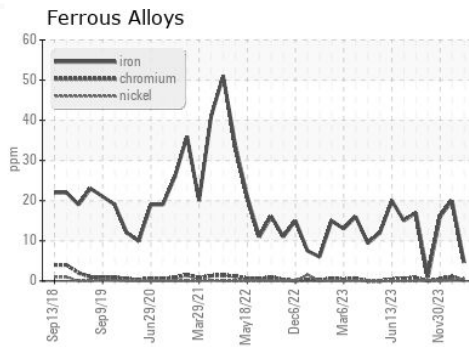

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098999 **Received** : 11 Jan 2024  
**Lab Number** : 06057889 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10829271 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 084 - Clarksville**  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042  
 Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com  
 T: (931)552-7276  
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)