


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

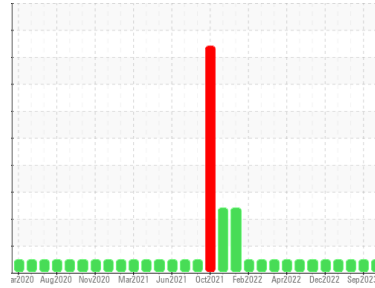

Machine Id  
**12023**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0101768</b>	PCA0101728	PCA0077268
Sample Date	Client Info	<b>09 Jan 2024</b>	05 Sep 2023	24 May 2023
Machine Age	hrs	<b>9761</b>	9324	8749
Oil Age	hrs	<b>437</b>	575	471
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>7</b>	7	8
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>3</b>	2	2
Lead	ppm ASTM D5185m >40	<b>0</b>	1	1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	0
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>11</b>	23	18
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>66</b>	65	72
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>827</b>	828	906
Calcium	ppm ASTM D5185m 1070	<b>1105</b>	1530	1263
Phosphorus	ppm ASTM D5185m 1150	<b>938</b>	1020	1031
Zinc	ppm ASTM D5185m 1270	<b>1195</b>	1280	1283
Sulfur	ppm ASTM D5185m 2060	<b>2846</b>	3808	3577

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	5	4
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	3	4
Potassium	ppm ASTM D5185m >20	<b>0</b>	2	2



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>7.0</b>	6.1	6.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.8</b>	17.4	18.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.2</b>	12.3	13.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.9</b>	7.7	8.7





# OIL ANALYSIS REPORT

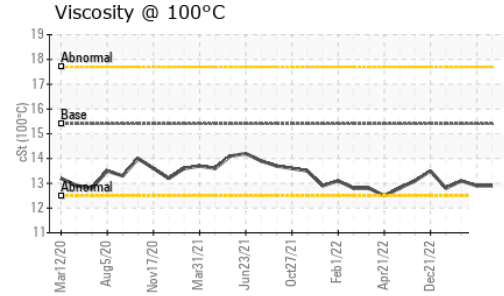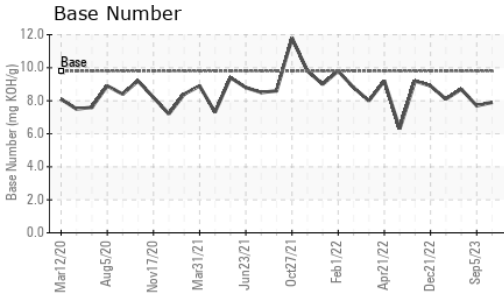

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.9</b>	12.9	13.1

## GRAPHS

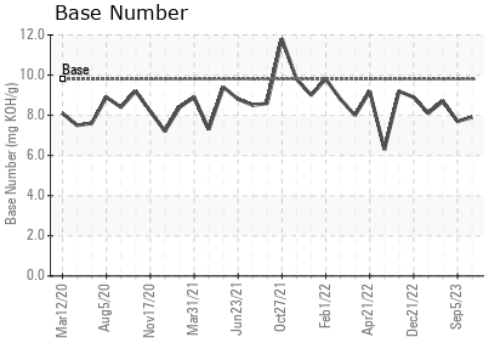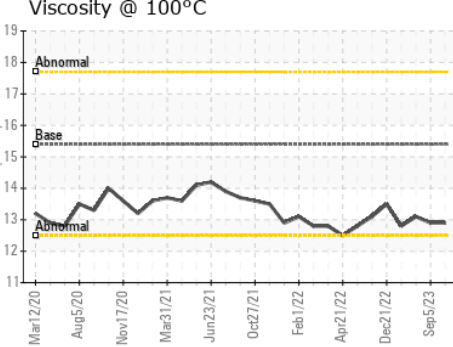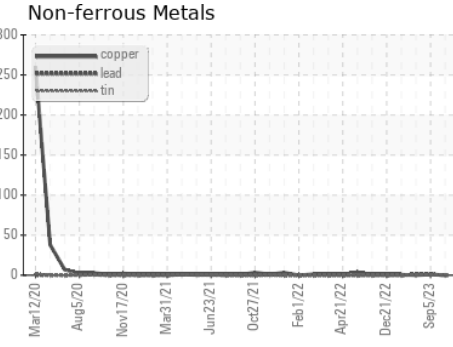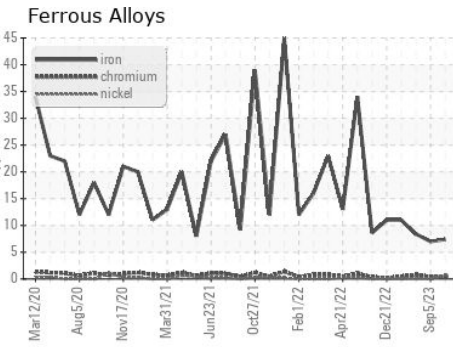

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101768 **Recieved** : 11 Jan 2024  
**Lab Number** : **06057894** **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10829276 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 002 - Vance-Granville**  
 241 Vanco Mill Rd  
 Henderson, NC  
 US 27537  
 Contact: Cameron King  
 cameron.king@gflenv.com  
 T: (252)438-5333  
 F: (252)431-1635

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)