


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

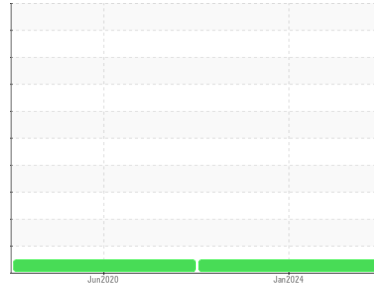

Machine Id
26330
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0116227	PCA0016168	---
Sample Date	Client Info			09 Jan 2024	01 Jun 2020	---
Machine Age	hrs	Client Info		697459	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	58	45	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>4	1	2	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	7	7	---
Lead	ppm	ASTM D5185m	>40	4	4	---
Copper	ppm	ASTM D5185m	>330	3	5	---
Tin	ppm	ASTM D5185m	>15	2	0	---
Antimony	ppm	ASTM D5185m		---	2	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	<1	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		9	3	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		51	54	---
Manganese	ppm	ASTM D5185m		1	<1	---
Magnesium	ppm	ASTM D5185m		766	949	---
Calcium	ppm	ASTM D5185m		1187	1078	---
Phosphorus	ppm	ASTM D5185m		954	955	---
Zinc	ppm	ASTM D5185m		1247	1097	---
Sulfur	ppm	ASTM D5185m		2349	2263	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	6	---
Sodium	ppm	ASTM D5185m		12	9	---
Potassium	ppm	ASTM D5185m	>20	0	10	---
Fuel	%	ASTM D3524	>5	1.2	<1.0	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	1	---
Nitration	Abs/cm	*ASTM D7624	>20	12.4	11.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.7	23.9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.1	21	---
Base Number (BN)	mg KOH/g	ASTM D2896		3.4	6.2	---





OIL ANALYSIS REPORT

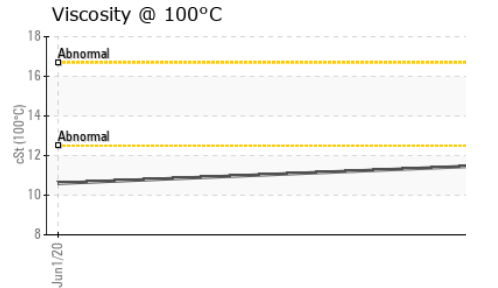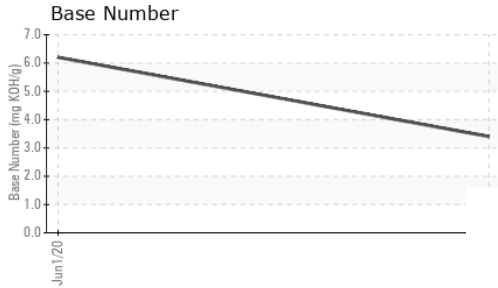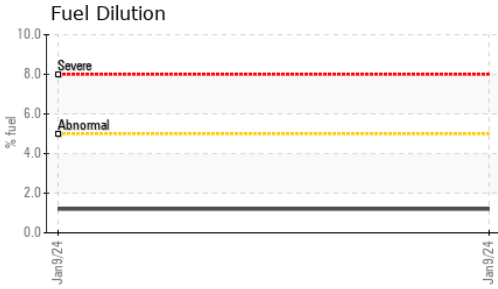

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.5	10.6	---

GRAPHS

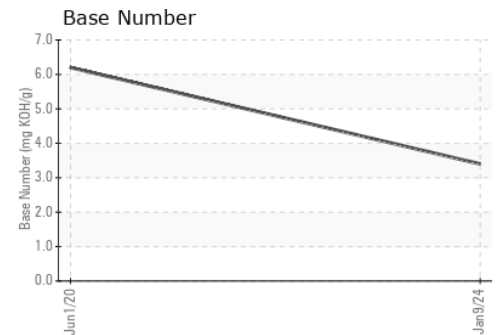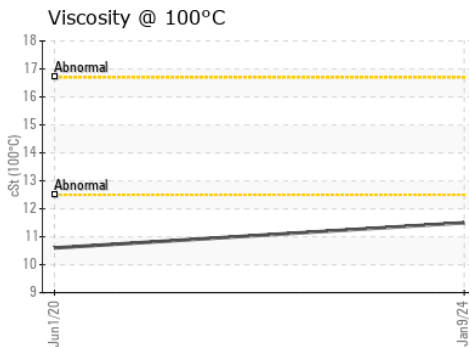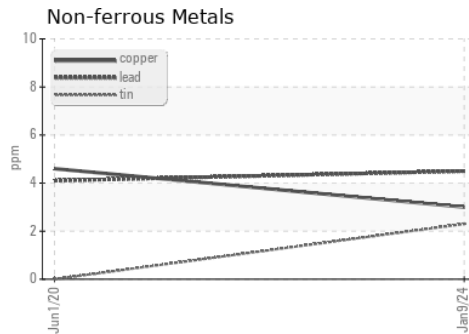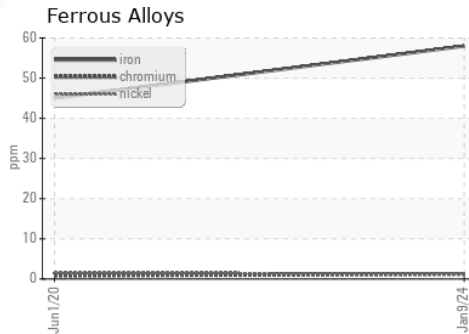

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116227 **Received** : 11 Jan 2024
Lab Number : 06057899 **Diagnosed** : 15 Jan 2024
Unique Number : 10829281 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070