


# OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

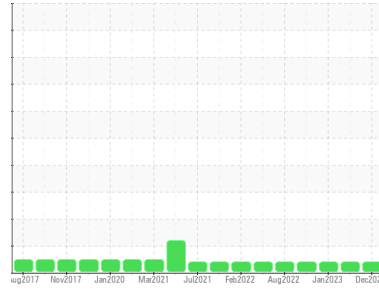

Machine Id  
**20350**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (10 GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0112302</b>	PCA0108155	PCA0088214
Sample Date	Client Info		<b>14 Dec 2023</b>	24 Oct 2023	11 Jan 2023
Machine Age	hrs	Client Info	<b>6579</b>	5574	5574
Oil Age	hrs	Client Info	<b>300</b>	3613	3727
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	ATTENTION	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>1</b>	3	6
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>6</b>	16	18
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	4
Molybdenum	ppm	ASTM D5185m 100	<b>56</b>	59	65
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 450	<b>894</b>	887	900
Calcium	ppm	ASTM D5185m 3000	<b>1008</b>	1007	1074
Phosphorus	ppm	ASTM D5185m 1150	<b>1009</b>	959	995
Zinc	ppm	ASTM D5185m 1350	<b>1228</b>	1210	1231
Sulfur	ppm	ASTM D5185m 4250	<b>3125</b>	3063	3518

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	3	4
Sodium	ppm	ASTM D5185m >216	<b>0</b>	1	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	2

## INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.4</b>	5.3	5.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>16.5</b>	17.0	16.7

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.5</b>	12.7	12.5
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.9</b>	9.2	9.3

# OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

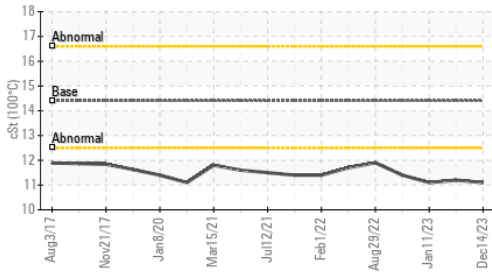





Base Number

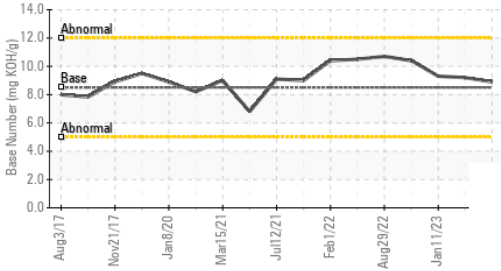

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES			method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.1	▲ 11.2	▲ 11.1	

## GRAPHS

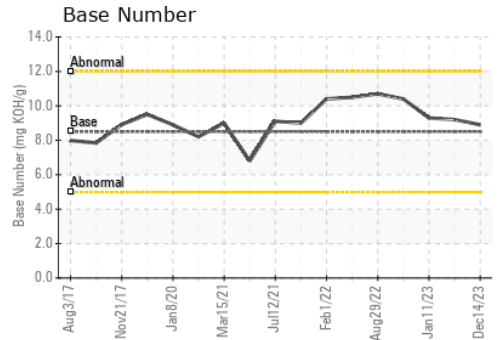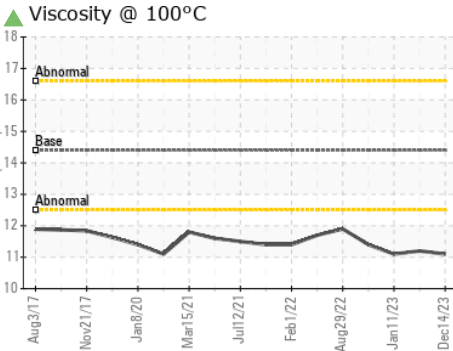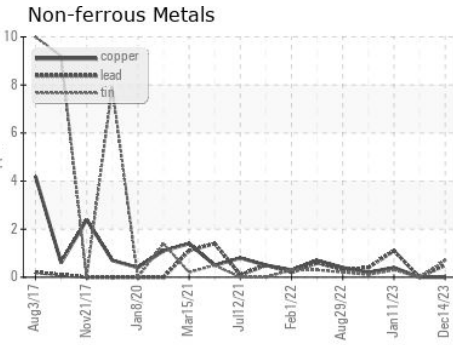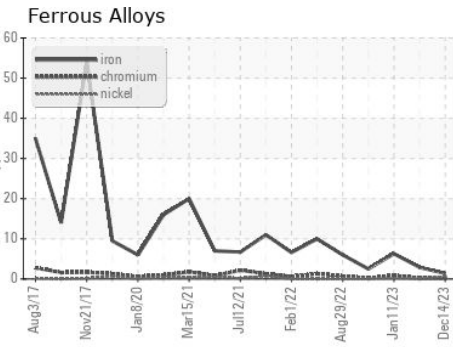

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112302 **Recieved** : 11 Jan 2024  
**Lab Number** : 06057906 **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10829288 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: KEVIN HOOKS  
 kevin.hooks@perdue.com  
 T: (843)841-8069  
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)