


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

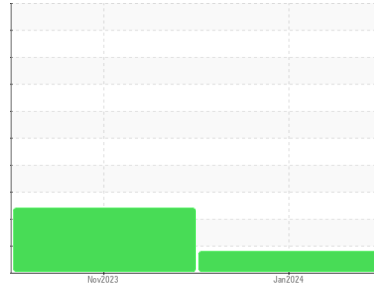

Area
FLEET
 Machine Id
Perdue farms. 2227073 (S/N N631485. 2227073)
 Component
Bottom Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 30 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0116223	PCA0108146	---
Sample Date	Client Info		08 Jan 2024	06 Nov 2023	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	13	28	---
Chromium	ppm	ASTM D5185m >20	<1	<1	---
Nickel	ppm	ASTM D5185m >4	3	1	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m >3	5	19	---
Aluminum	ppm	ASTM D5185m >20	9	▲ 27	---
Lead	ppm	ASTM D5185m >40	0	4	---
Copper	ppm	ASTM D5185m >330	▲ 368	184	---
Tin	ppm	ASTM D5185m >15	2	3	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	14	243	---
Barium	ppm	ASTM D5185m 10	0	<1	---
Molybdenum	ppm	ASTM D5185m 100	64	116	---
Manganese	ppm	ASTM D5185m	1	4	---
Magnesium	ppm	ASTM D5185m 450	873	706	---
Calcium	ppm	ASTM D5185m 3000	1054	1454	---
Phosphorus	ppm	ASTM D5185m 1150	919	706	---
Zinc	ppm	ASTM D5185m 1350	1150	840	---
Sulfur	ppm	ASTM D5185m 4250	2622	2377	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	15	▲ 79	---
Sodium	ppm	ASTM D5185m >75	0	4	---
Potassium	ppm	ASTM D5185m >20	18	80	---
Fuel	%	ASTM D3524 >5	<1.0	0.4	---





INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	7.7	8.7	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.0	24.6	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.4	21.9	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	6.3	8.5	---





OIL ANALYSIS REPORT

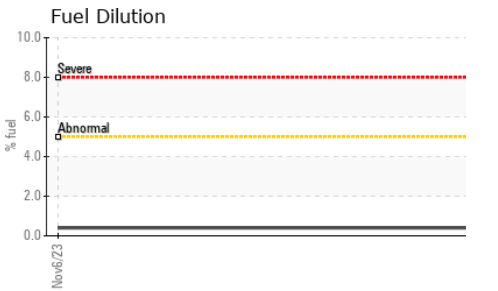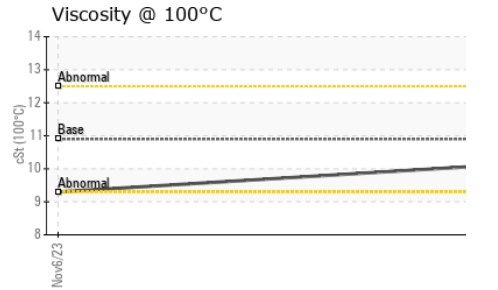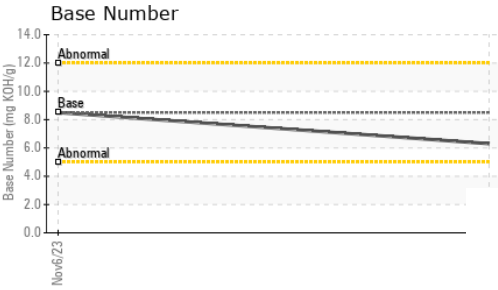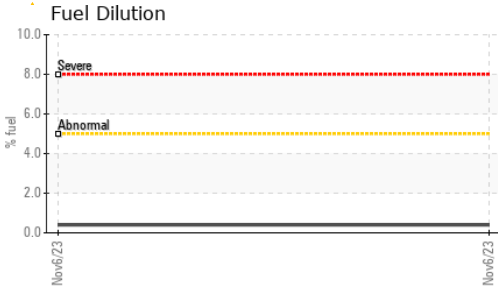

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	10.1	9.3

GRAPHS

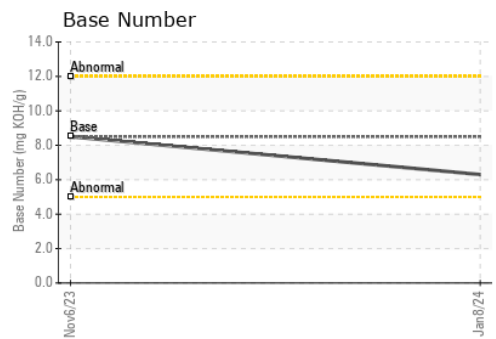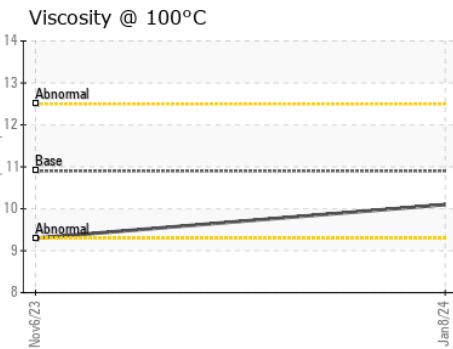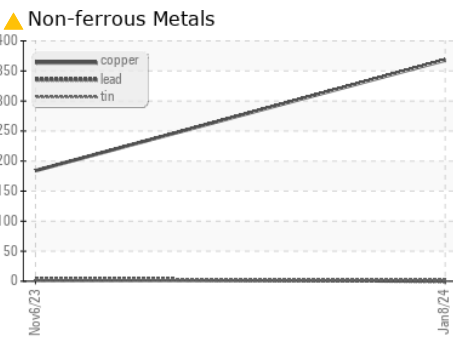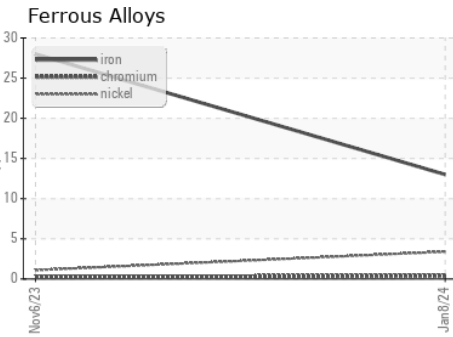

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116223 **Recieved** : 11 Jan 2024
Lab Number : 06057917 **Diagnosed** : 12 Jan 2024
Unique Number : 10829299 **Diagnostician** : Don Baldrige

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)