


OIL ANALYSIS REPORT

Sample Rating Trend



WATER

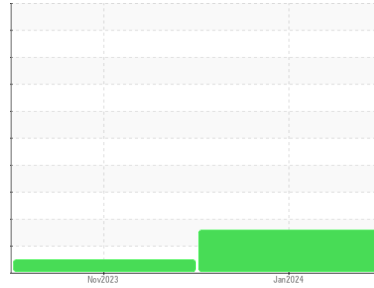

Area
FLEET
 Machine Id
2227083 (S/N 4v4nc9eh4rn643763)
 Component
2 Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0112371	PCA0108162	---
Sample Date	Client Info			07 Jan 2024	08 Nov 2023	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				ABNORMAL	NORMAL	---



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	161	134	---
Chromium	ppm	ASTM D5185m	>10	3	2	---
Nickel	ppm	ASTM D5185m	>10	3	1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	0	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>100	<1	6	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	88	167	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	0	0	---
Manganese	ppm	ASTM D5185m		11	9	---
Magnesium	ppm	ASTM D5185m	12	2	0	---
Calcium	ppm	ASTM D5185m	150	21	97	---
Phosphorus	ppm	ASTM D5185m	1650	1173	1188	---
Zinc	ppm	ASTM D5185m	125	16	37	---
Sulfur	ppm	ASTM D5185m	22500	26013	27006	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	41	37	---
Sodium	ppm	ASTM D5185m		2	3	---
Potassium	ppm	ASTM D5185m	>20	3	1	---
Water	%	ASTM D6304	>.2	▲ 0.285	---	---
ppm Water	ppm	ASTM D6304	>2000	▲ 2850	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	0.2%	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

OIL ANALYSIS REPORT

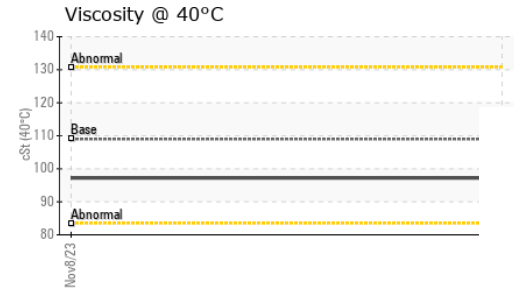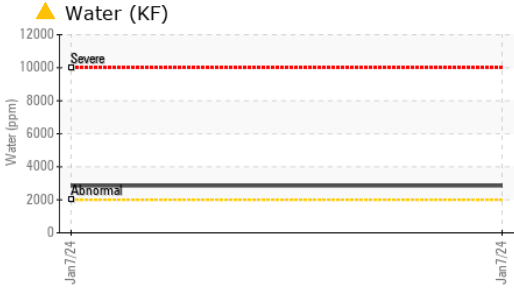




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	109	97.2	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

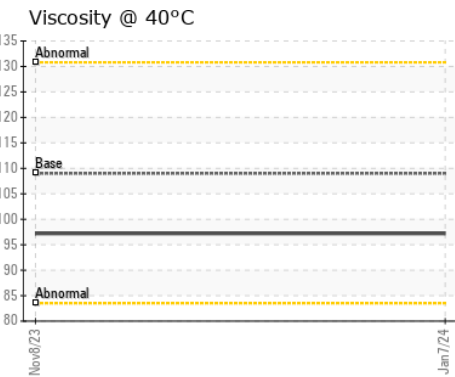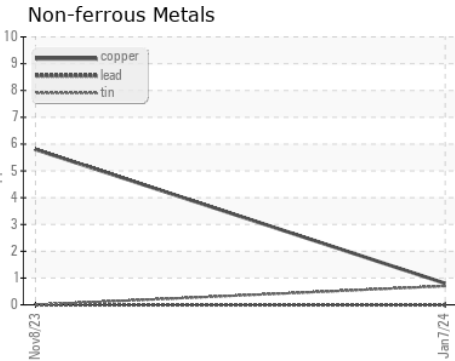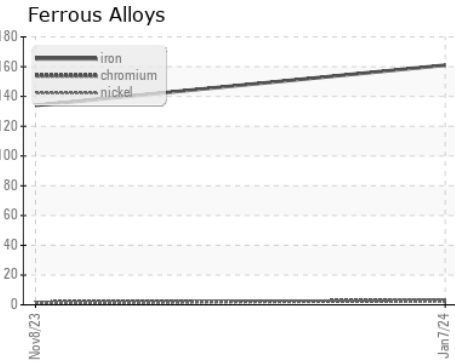

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0112371 **Recieved** : 11 Jan 2024
Lab Number : 06058415 **Diagnosed** : 14 Jan 2024
Unique Number : 10829797 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: KF)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070