

# OIL ANALYSIS REPORT

Sample Rating Trend



**DIRT**



Area  
**FLEET**  
 Machine Id  
**VOLVO VNR64T640 26631**  
 Component  
**Front Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0112310</b>	---	---
Sample Date	Client Info			<b>28 Dec 2023</b>	---	---
Machine Age	mls	Client Info		<b>350120</b>	---	---
Oil Age	mls	Client Info		<b>350120</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	---	---



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>437</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>7</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>48</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>97</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>12</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>140</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>13</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>2</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>77</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1440</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>54</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>21966</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	▲ <b>87</b>	---	---
Sodium	ppm	ASTM D5185m		<b>10</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

# OIL ANALYSIS REPORT

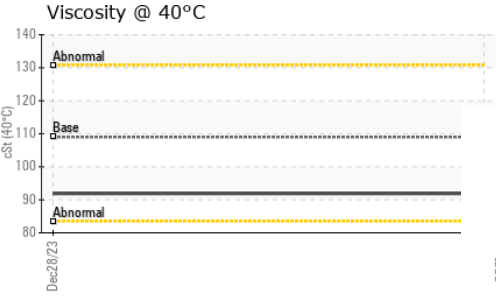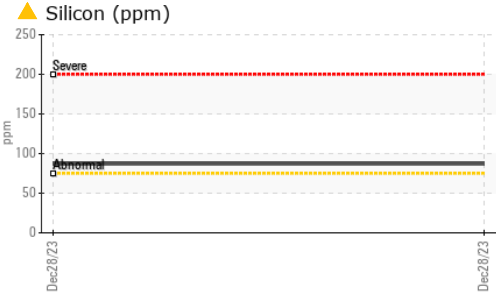




### FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	109	<b>91.9</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

### GRAPHS

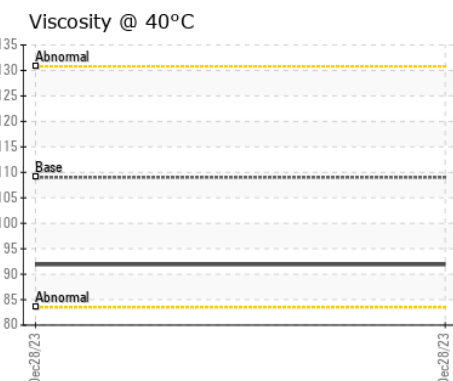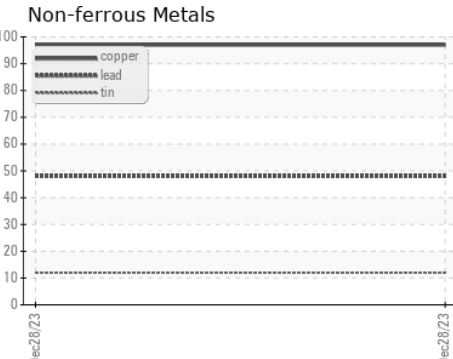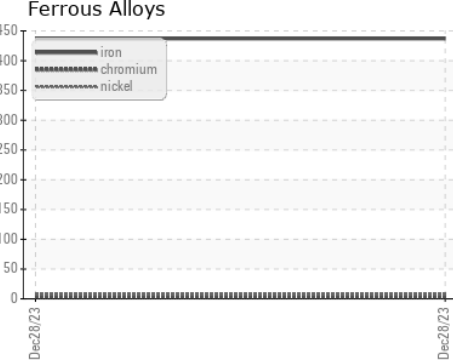

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112310 **Recieved** : 11 Jan 2024  
**Lab Number** : **06058419** **Diagnosed** : 14 Jan 2024  
**Unique Number** : 10829801 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**PERDUE FARMS - DILLON**  
 2047 HWY 9 WEST  
 DILLON, SC  
 US 29536  
 Contact: KEVIN HOOKS  
 kevin.hooks@perdue.com  
 T: (843)841-8069  
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)