




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**1106M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- QTS)**

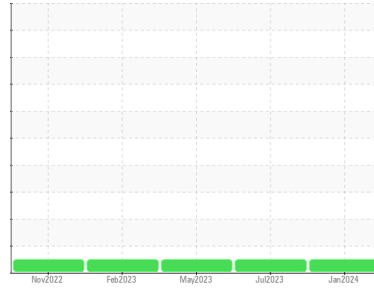

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0106635</b>	GFL0087328	GFL0072940
Sample Date	Client Info		<b>04 Jan 2024</b>	31 Jul 2023	12 May 2023
Machine Age	hrs	Client Info	<b>13098</b>	11996	11382
Oil Age	hrs	Client Info	<b>554</b>	614	621
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>8</b>	3	10
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	<1	1
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>30	<b>3</b>	<1	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>53</b>	57	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>853</b>	981	967
Calcium	ppm	ASTM D5185m	1070	<b>945</b>	1118	1077
Phosphorus	ppm	ASTM D5185m	1150	<b>965</b>	1015	1035
Zinc	ppm	ASTM D5185m	1270	<b>1106</b>	1289	1284
Sulfur	ppm	ASTM D5185m	2060	<b>3114</b>	3766	3774

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	<b>6</b>	3	4
Sodium	ppm	ASTM D5185m		<b>0</b>	<1	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	1

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.2</b>	4.3	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.0</b>	16.8	19.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.3</b>	12.4	14.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.0</b>	8.9	8.6







# OIL ANALYSIS REPORT

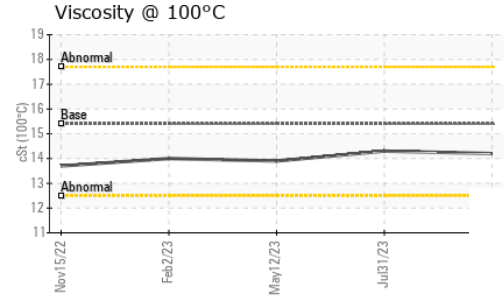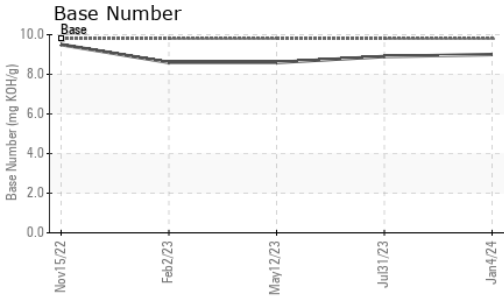

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.3	13.9

## GRAPHS

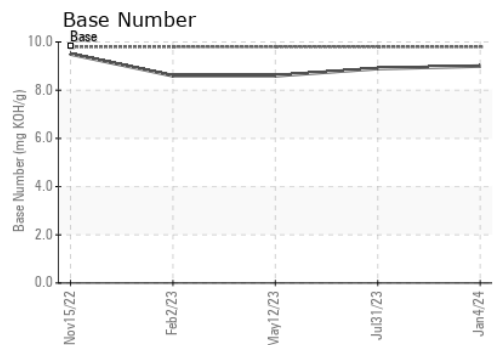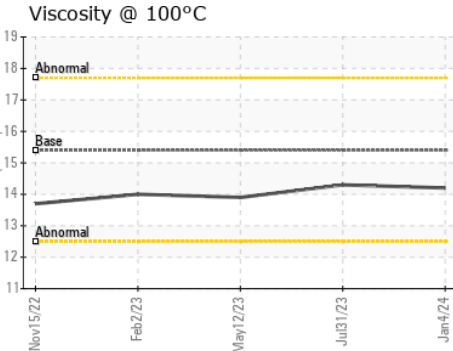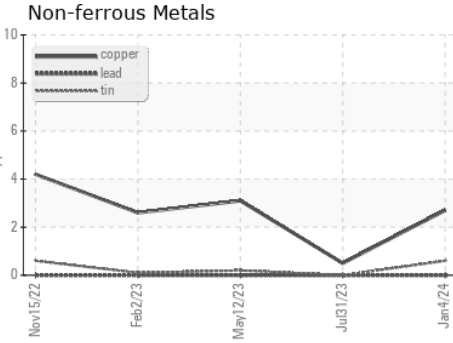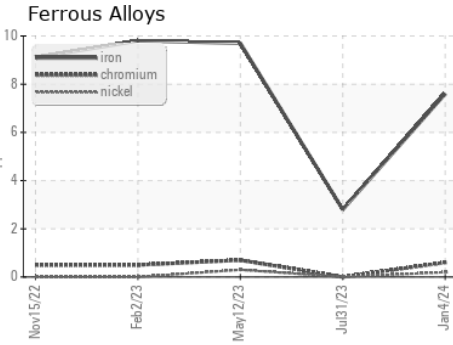

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0106635 **Received** : 11 Jan 2024  
**Lab Number** : **06058594** **Diagnosed** : 12 Jan 2024  
**Unique Number** : 10829976 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 405 - Arbor Hills**  
 7400 Napier Rd  
 NORTHVILLE, MI  
 US 48168  
 Contact: John Nahal  
 jnahal@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)