




PROBLEM SUMMARY

Sample Rating Trend



FUEL



Machine Id
10964 FREIGHTLINER M2 106
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (28 QTS)

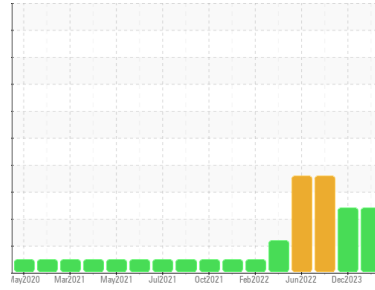

COMPONENT CONDITION SUMMARY

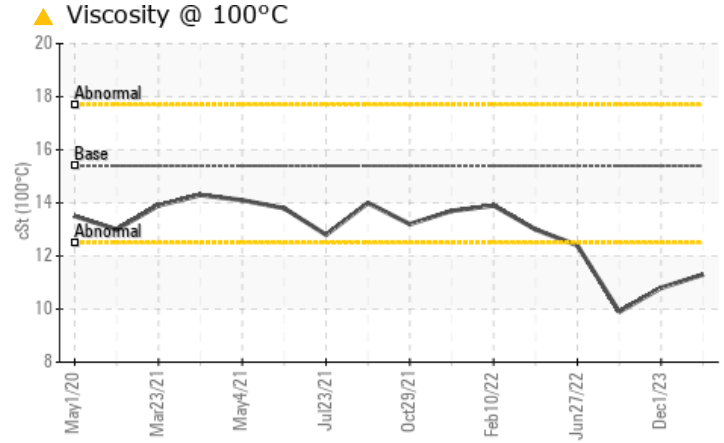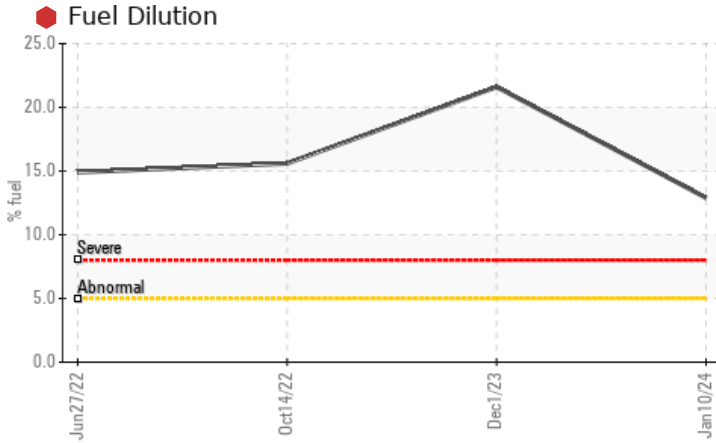

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Fuel	%	ASTM D3524	>5	12.9	21.6	15.6
Visc @ 100°C	cSt	ASTM D445	15.4	11.3	10.8	9.9

Customer Id: GFL001
Sample No.: GFL0103219
Lab Number: 06058972
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

01 Dec 2023 Diag: Doug Bogart

FUEL



We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



14 Oct 2022 Diag: Doug Bogart

FUEL



We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. There is a high amount of fuel present in the oil. Test for glycol is negative. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



27 Jun 2022 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. There is a high amount of fuel present in the oil. Test for glycol is negative. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

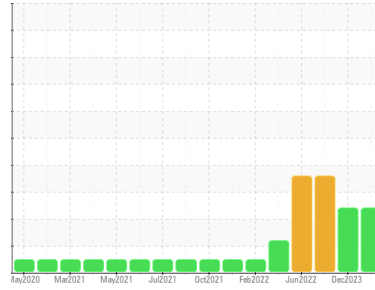

FUEL



Machine Id
10964 FREIGHTLINER M2 106
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (28 QTS)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103219	GFL0103257	GFL0056523
Sample Date	Client Info	10 Jan 2024	01 Dec 2023	14 Oct 2022
Machine Age	hrs	12155	11997	9261
Oil Age	hrs	0	0	688
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		SEVERE	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	28	75	64
Chromium	ppm ASTM D5185m >5	1	2	3
Nickel	ppm ASTM D5185m >2	<1	<1	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	2	4	7
Lead	ppm ASTM D5185m >30	2	0	4
Copper	ppm ASTM D5185m >150	<1	<1	2
Tin	ppm ASTM D5185m >5	1	0	1
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	1	0	5
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	53	47	57
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	891	740	470
Calcium	ppm ASTM D5185m 1070	998	837	1286
Phosphorus	ppm ASTM D5185m 1150	965	853	787
Zinc	ppm ASTM D5185m 1270	1205	997	960
Sulfur	ppm ASTM D5185m 2060	2993	2170	2804

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	4	6	7
Sodium	ppm ASTM D5185m	5	8	79
Potassium	ppm ASTM D5185m >20	<1	2	11
Fuel	% ASTM D3524 >5	12.9	21.6	15.6

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1.1	2.3	1.6
Nitration	Abs/cm *ASTM D7624 >20	10.7	15.6	15.6
Sulfation	Abs/.1mm *ASTM D7415 >30	21.1	27.5	29.0


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	19.3	29.3	29.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.8	5.6	6.3




OIL ANALYSIS REPORT


Fuel Dilution

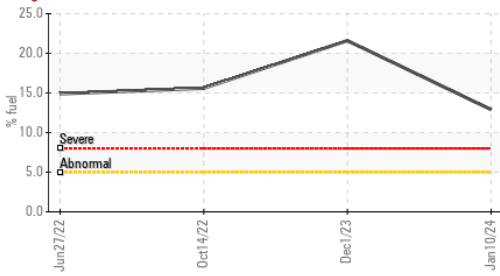

Viscosity @ 100°C

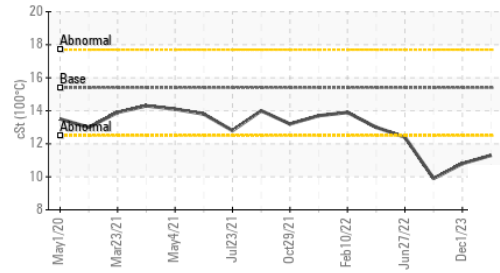

Base Number

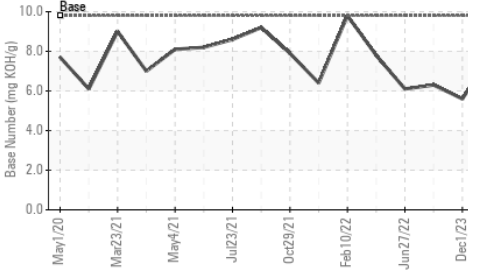

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.3	▲ 10.8

GRAPHS


Ferrous Alloys

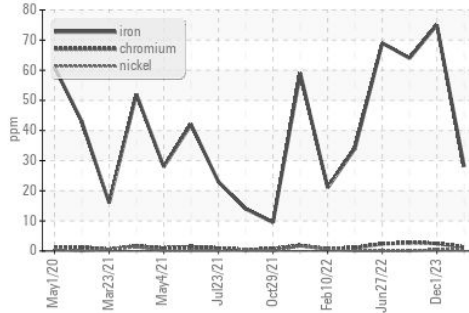


Non-ferrous Metals

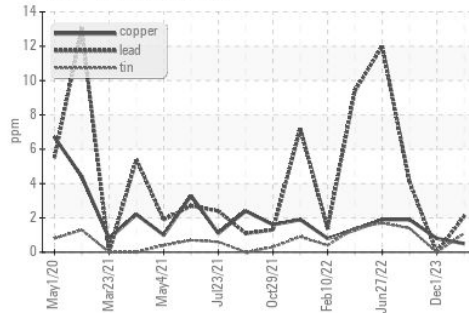

Viscosity @ 100°C

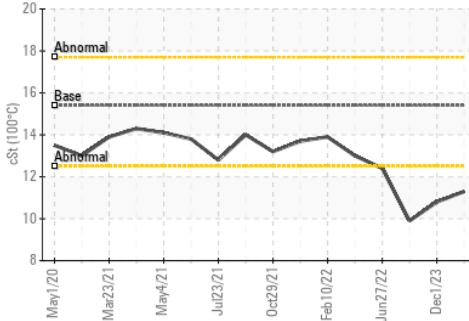

Base Number

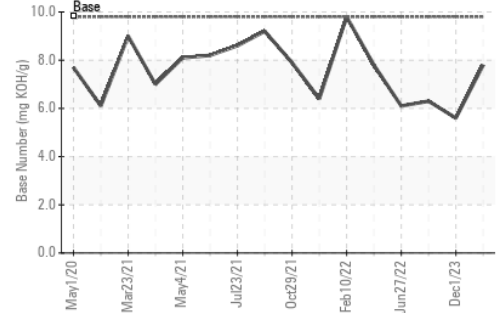

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0103219 Recieved : 12 Jan 2024
 Lab Number : 06058972 Diagnosed : 16 Jan 2024
 Unique Number : 10830354 Diagnostician : Wes Davis
 Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 001 - Raleigh(CNG)
 3741 Conquest Drive
 Garner, NC
 US 27529
 Contact: Ronald Gregory
 rgregory@gflenv.com
 T:
 F: (919)662-1730

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)