


# OIL ANALYSIS REPORT



Area  
**N.E.R./Off-Road**  
Machine Id  
**L86**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

Sample Rating Trend

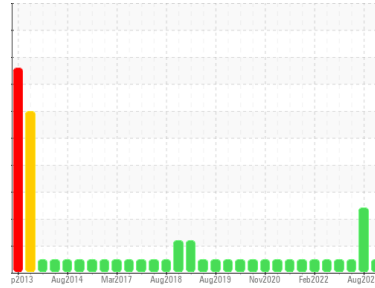

NORMAL

✓

## DIAGNOSIS

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0109654</b>	PCA0098471	PCA0090583
Sample Date	Client Info	<b>09 Jan 2024</b>	07 Aug 2023	09 May 2023
Machine Age	hrs Client Info	<b>106810</b>	16427	106810
Oil Age	hrs Client Info	<b>14458</b>	14458	14458
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>8</b>	14	9
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>1</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	1	<1
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Aluminum	ppm ASTM D5185m >25	<b>2</b>	0	1
Lead	ppm ASTM D5185m >40	<b>2</b>	9	1
Copper	ppm ASTM D5185m >330	<b>38</b>	33	1
Tin	ppm ASTM D5185m >15	<b>0</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	6
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	70	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	2	<1
Magnesium	ppm ASTM D5185m 1010	<b>959</b>	819	997
Calcium	ppm ASTM D5185m 1070	<b>1019</b>	905	1146
Phosphorus	ppm ASTM D5185m 1150	<b>1042</b>	914	1079
Zinc	ppm ASTM D5185m 1270	<b>1316</b>	1134	1336
Sulfur	ppm ASTM D5185m 2060	<b>3285</b>	3471	3904

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	4	4
Sodium	ppm ASTM D5185m	<b>19</b>	▲ 129	2
Potassium	ppm ASTM D5185m >20	<b>20</b>	▲ 147	5



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>7.5</b>	8.9	6.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.1</b>	19.9	19.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.3</b>	16.4	15.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>10.56</b>	10.67	9.57









# OIL ANALYSIS REPORT

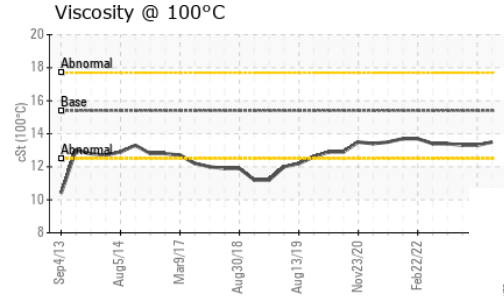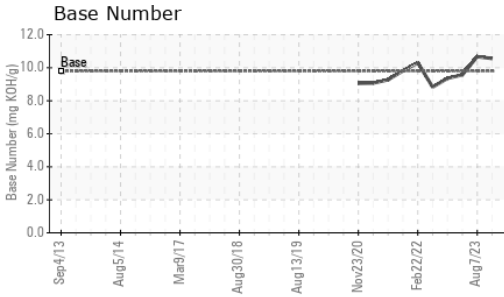

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	13.3	13.3

## GRAPHS

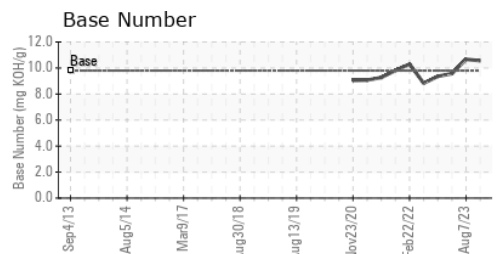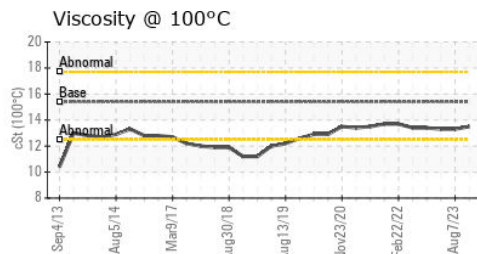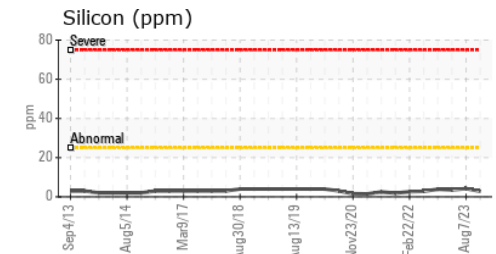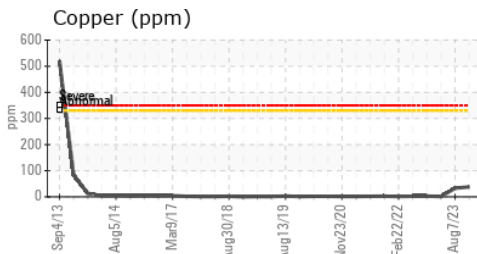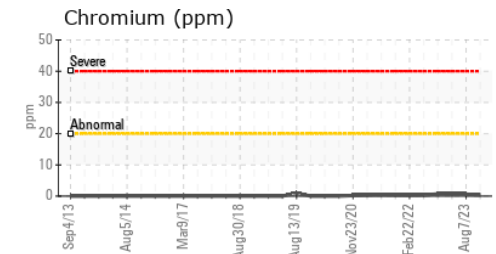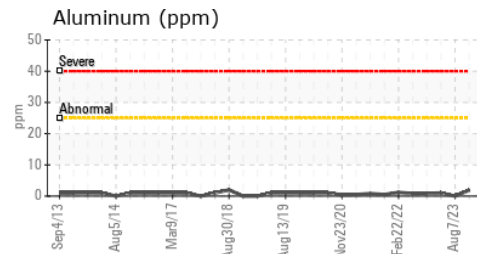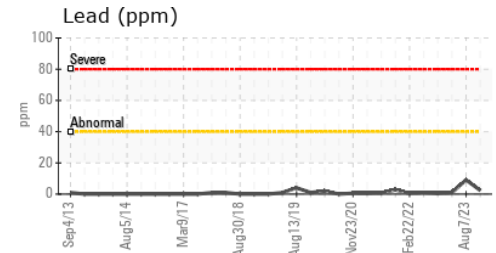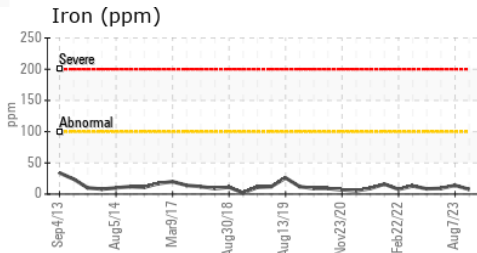

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109654 **Recieved** : 12 Jan 2024  
**Lab Number** : **06059433** **Diagnosed** : 15 Jan 2024  
**Unique Number** : 10830815 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: