


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

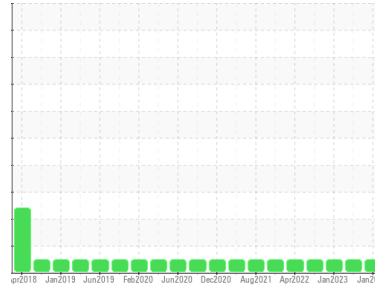

Machine Id  
**VOLVO 26606**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0094601</b>	PCA0052353	PCA0052362
Sample Date	Client Info			<b>02 Jan 2024</b>	04 Apr 2023	18 Jan 2023
Machine Age	mls Client Info			<b>653284</b>	634094	611329
Oil Age	mls Client Info			<b>19190</b>	22765	24221
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>38</b>	23	40
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>10</b>	5	6
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>&lt;1</b>	<1	1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	63	62
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	950	<b>933</b>	963	949
Calcium	ppm	ASTM D5185m	1050	<b>1101</b>	1114	1070
Phosphorus	ppm	ASTM D5185m	995	<b>959</b>	1035	944
Zinc	ppm	ASTM D5185m	1180	<b>1221</b>	1266	1251
Sulfur	ppm	ASTM D5185m	2600	<b>3140</b>	3357	3051

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	2	5
Sodium	ppm	ASTM D5185m		<b>13</b>	13	16
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.6	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.8</b>	9.1	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	19.3	21.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.5</b>	16.3	18.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.1</b>	6.1	6.2





# OIL ANALYSIS REPORT

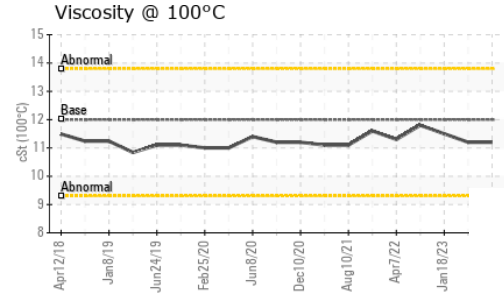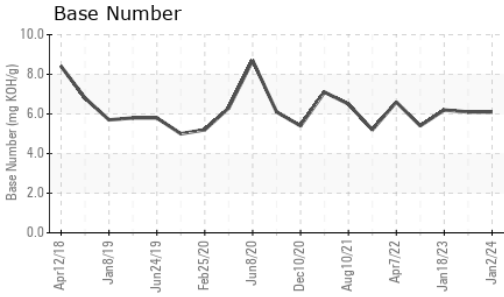

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.5

## GRAPHS

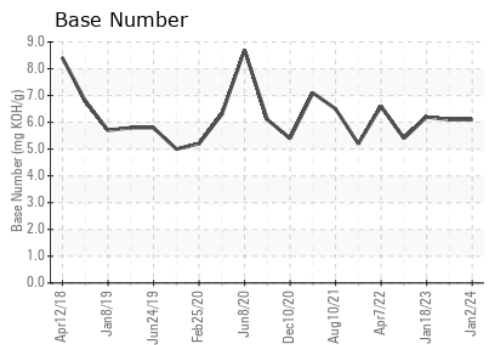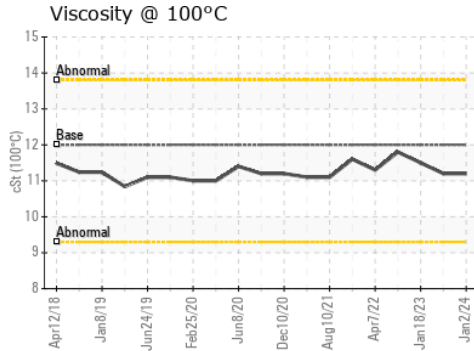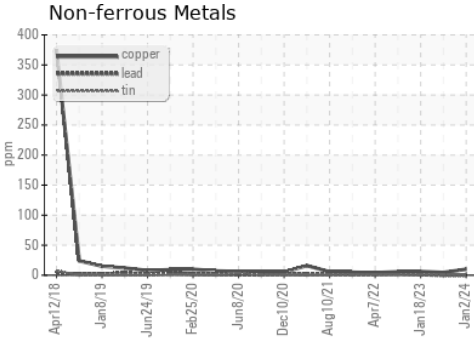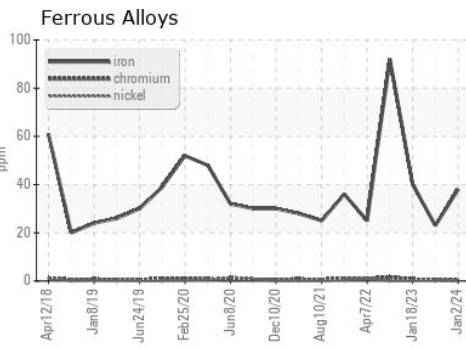

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0094601 **Received** : 12 Jan 2024  
**Lab Number** : 06059893 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831275 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - WASHINGTON**  
P.O. BOX 539  
WASHINGTON, IN  
US 47501  
Contact: DEREK RYAN  
derek.ryan@perdue.com  
T: (812)257-3023  
F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)