




PROBLEM SUMMARY

Sample Rating Trend

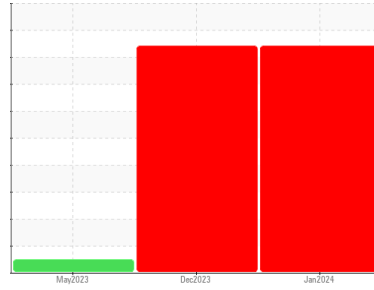

GLYCOL




Machine Id
949010-205269

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

Glycol Contamination

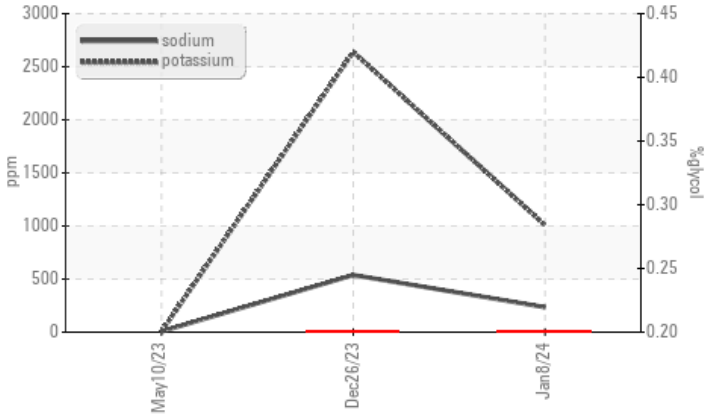

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. (Customer Sample Comment: Engine oil sample)

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	SEVERE	NORMAL
Sodium	ppm	ASTM D5185m	▲ 235	▲ 538	6
Potassium	ppm	ASTM D5185m >20	▲ 1008	▲ 2639	5
Glycol	%	*ASTM D2982	● 0.20	● 0.20	---

Customer Id: GFL865
 Sample No.: GFL0100551
 Lab Number: 06059973
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

26 Dec 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. There is a high concentration of glycol present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



10 May 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

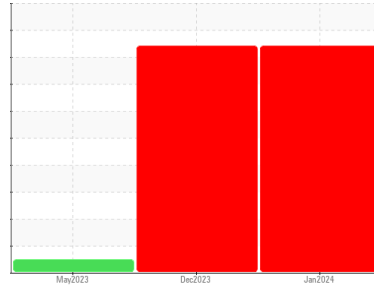

GLYCOL



Machine Id
949010-205269

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. (Customer Sample Comment: Engine oil sample)

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. There is a high concentration of glycol present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0100551	GFL0100548	GFL0065148
Sample Date	Client Info	08 Jan 2024	26 Dec 2023	10 May 2023
Machine Age	hrs	14513	14442	12898
Oil Age	hrs	14513	14442	0
Oil Changed	Client Info	Not Chngd	Changed	Changed
Sample Status		SEVERE	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	19	13	30
Chromium	ppm ASTM D5185m >4	3	1	2
Nickel	ppm ASTM D5185m >2	<1	0	<1
Titanium	ppm ASTM D5185m	0	0	<1
Silver	ppm ASTM D5185m >3	0	0	<1
Aluminum	ppm ASTM D5185m >9	3	2	4
Lead	ppm ASTM D5185m >30	3	0	3
Copper	ppm ASTM D5185m >35	17	8	8
Tin	ppm ASTM D5185m >4	<1	0	1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	37	19	22
Barium	ppm ASTM D5185m 5	0	6	4
Molybdenum	ppm ASTM D5185m 50	162	399	50
Manganese	ppm ASTM D5185m 0	1	0	3
Magnesium	ppm ASTM D5185m 560	565	461	724
Calcium	ppm ASTM D5185m 1510	1546	1234	1358
Phosphorus	ppm ASTM D5185m 780	884	687	765
Zinc	ppm ASTM D5185m 870	1064	788	936
Sulfur	ppm ASTM D5185m 2040	2607	2815	2887

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	13	11	53
Sodium	ppm ASTM D5185m	235	538	6
Potassium	ppm ASTM D5185m >20	1008	2639	5
Glycol	% *ASTM D2982	0.20	0.20	---

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0.1	0	0
Nitration	Abs/cm *ASTM D7624 >20	9.7	11.3	10.2
Sulfation	Abs/.1mm *ASTM D7415 >30	18.5	21.0	20.5


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.4	15.4	18.4
Base Number (BN)	mg KOH/g ASTM D2896 10.2	15.3	11.0	7.3




OIL ANALYSIS REPORT

Glycol Contamination

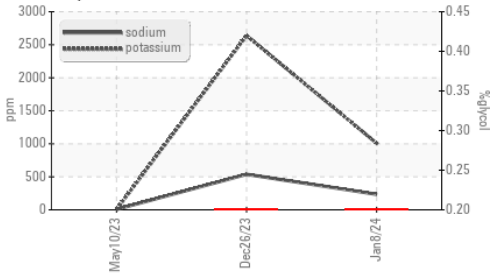

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


Base Number

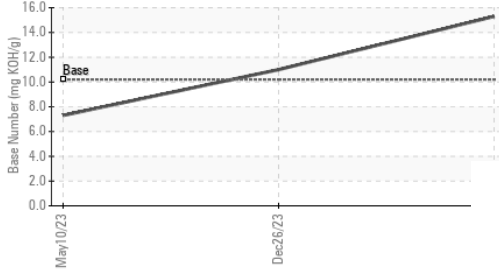


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	15.0	14.89

GRAPHS


Ferrous Alloys

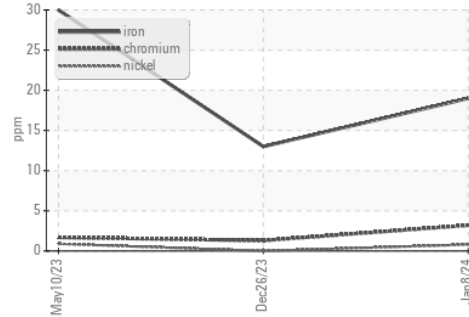


Viscosity @ 100°C

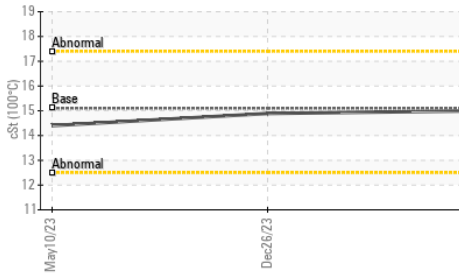


Non-ferrous Metals

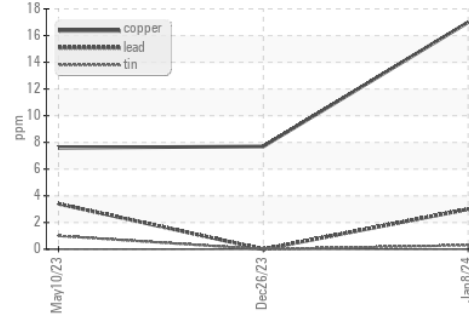

Viscosity @ 100°C

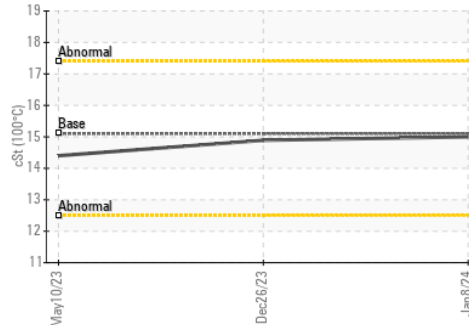

Base Number

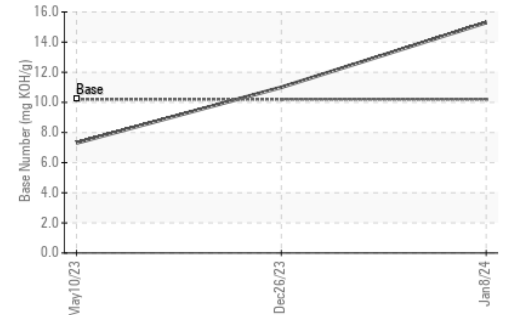

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0100551 Recieved : 12 Jan 2024
 Lab Number : 06059973 Diagnosed : 16 Jan 2024
 Unique Number : 10831355 Diagnostician : Don Baldrige
 Test Package : FLEET

GFL Environmental - 865 - East Mount Hauling
 7213 East Mount Houston Road
 Houston, TX
 US 77050
 Contact: Jose Gonzalez
 jgonzalez2@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: