


OIL ANALYSIS REPORT







Machine Id M41-003 Component

Diesel Engine Fluid CHEVRON DELO 400 SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.


SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0073333		
Sample Date		Client Info		08 Dec 2023		
Machine Age	mls	Client Info		46217		
Oil Age	mls	Client Info		46217		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	62		
Chromium	ppm	ASTM D5185m	>20	4		
Nickel	ppm	ASTM D5185m	>4	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	42		
Lead	ppm	ASTM D5185m	>40	<1		
Copper	ppm	ASTM D5185m	>330	123		
Tin	ppm	ASTM D5185m	>15	4		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
				•		
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	-	history1	history2
	ppm ppm		limit/base	current	· · · · ·	
Boron		ASTM D5185m	limit/base	current 24		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	limit/base	current 24 0		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	limit/base	current 24 0 42 3 507		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		current 24 0 42 3 507 1642		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1260	current 24 0 42 3 507 1642 674		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		current 24 0 42 3 507 1642 674 831	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1260 1400	current 24 0 42 3 507 1642 674 831 1606		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1260 1400 limit/base	current 24 0 42 3 507 1642 674 831 1606 current	 history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1260 1400	current 24 0 42 3 507 1642 674 831 1606 current 11	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1260 1400 limit/base >25	current 24 0 42 3 507 1642 674 831 1606 current 11 5	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m	1260 1400 limit/base >25 >20	current 24 0 42 3 507 1642 674 831 1606 current 11 5 94	 history1 	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	1260 1400 limit/base >25 >20 limit/base	current 24 0 42 3 507 1642 674 831 1606 current 11 5 94 current	 history1 history1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	1260 1400 limit/base >25 >20 limit/base >3	current 24 0 42 3 507 1642 674 831 1606 current 11 5 94 current 1.2	 history1 history1 	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm	ASTM D5185m ASTM D5185m	1260 1400 imit/base >25 >20 imit/base >3 >20	current 24 0 42 3 507 1642 674 831 1606 current 11 5 94 current 1.2 11.8	 history1 history1	history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	1260 1400 limit/base >25 >20 limit/base >3	current 24 0 42 3 507 1642 674 831 1606 current 11 5 94 current 1.2	 history1 history1 	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	1260 1400 imit/base >25 >20 imit/base >3 >20	current 24 0 42 3 507 1642 674 831 1606 current 11 5 94 current 1.2 11.8	 history1 history1	history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	1260 1400 225 >20 1imit/base >20 20 20 20 20 20 20 20 20 20 20	current 24 0 42 3 507 1642 674 831 1606 current 11 5 94 current 1.2 11.8 24.6	 history1 history1 history1	 history2 history2 history2



OIL ANALYSIS REPORT





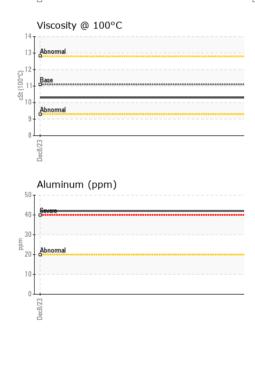

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
Free Water	scalar	*Visual	20.L	NEG		
			11 1. 4			
FLUID PROPE		method	limit/base	current	history1	history2
/isc @ 100°C	cSt	ASTM D445	11.1	10.3		
GRAPHS						
Ferrous Alloys						
iron						
- chromium						
nickel						
+						
~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			
Dec8/23			Dec8/23			
Non-ferrous Meta	ls					
copper						
lead						
)						
) +						
)+						
Dec8/23			Dec8/23			
			Dé			
Viscosity @ 100°	C			Base Numbe	r	
			12.0	T		
Abnormal			10.0	Base		
Base			9.8 Q			
Base			<u>ل</u> ے ا			
			0.9 Base Number (mg KOH/g)			
Abnormal			94.0 82 82			
			2.0			
			0.0			
Dec8/23			Dec8/23	Dec8/23 -		
Dec			Dec	Dec		
WearCheck USA -	501 Madis	son Ave., Ca	ry, NC 27513		MIDWEST MOT	FOR EXPRES
	Recieved		Jan 2024		2169	MUSTANG D
06060599	Diagnose	ed :16.	Jan 2024		MOUI	NDS VIEW, M

 Unique Number
 : 10831981
 Diagnostician
 : Don Baldridge

 Certificate L2367
 Test Package
 : FLEET

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Laboratory

Sample No. Lab Number

F: x:

Contact: FRANK DIETZ

T: (763)225-6382

frank.dietz@mmeinc.com