


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

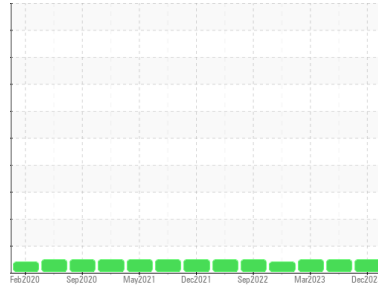

Area  
**600HP**  
 Machine Id  
**217419 [600HP]**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 10W30 (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0101191</b>	PCA0073139	PCA0073104
Sample Date	Client Info			<b>21 Dec 2023</b>	13 Jun 2023	30 Mar 2023
Machine Age	mls Client Info			<b>0</b>	608708	579811
Oil Age	mls Client Info			<b>0</b>	30000	33000
Oil Changed	Client Info			<b>Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>200		<b>12</b>	12	13
Chromium	ppm ASTM D5185m	>20		<b>&lt;1</b>	1	1
Nickel	ppm ASTM D5185m	>2		<b>0</b>	0	0
Titanium	ppm ASTM D5185m	>2		<b>0</b>	0	0
Silver	ppm ASTM D5185m	>2		<b>0</b>	0	0
Aluminum	ppm ASTM D5185m	>30		<b>4</b>	2	6
Lead	ppm ASTM D5185m	>30		<b>0</b>	0	0
Copper	ppm ASTM D5185m	>30		<b>3</b>	3	4
Tin	ppm ASTM D5185m	>15		<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m			<b>0</b>	0	0
Cadmium	ppm ASTM D5185m			<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	250		<b>15</b>	0	11
Barium	ppm ASTM D5185m	10		<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	100		<b>61</b>	63	57
Manganese	ppm ASTM D5185m			<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m	450		<b>914</b>	1040	898
Calcium	ppm ASTM D5185m	3000		<b>1043</b>	1167	1268
Phosphorus	ppm ASTM D5185m	1150		<b>1029</b>	1048	1057
Zinc	ppm ASTM D5185m	1350		<b>1270</b>	1317	1333
Sulfur	ppm ASTM D5185m	4250		<b>2715</b>	3408	3595

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>30		<b>4</b>	3	4
Sodium	ppm ASTM D5185m			<b>1</b>	<1	1
Potassium	ppm ASTM D5185m	>20		<b>0</b>	<1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3		<b>0.7</b>	0.6	0.6
Nitration	Abs/cm *ASTM D7624	>20		<b>8.3</b>	8.9	8.1
Sulfation	Abs/.1mm *ASTM D7415	>30		<b>20.5</b>	20.6	19.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25		<b>16.2</b>	16.6	16.1
Base Number (BN)	mg KOH/g ASTM D2896	8.5		<b>7.0</b>	8.0	6.3





# OIL ANALYSIS REPORT

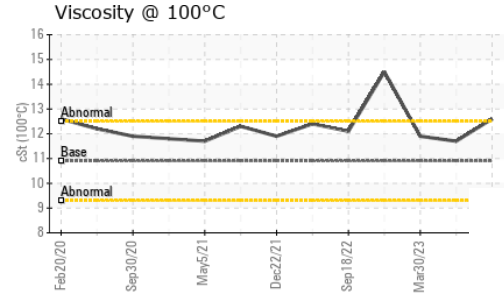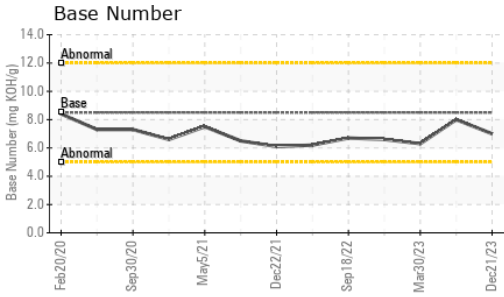

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>12.6</b>	11.7	11.9

## GRAPHS

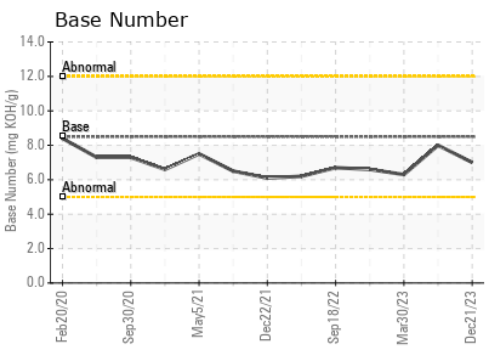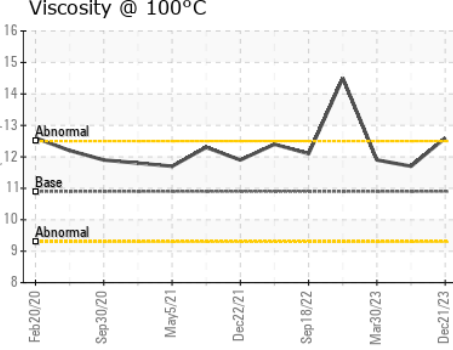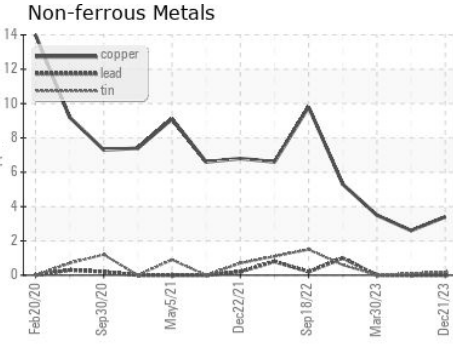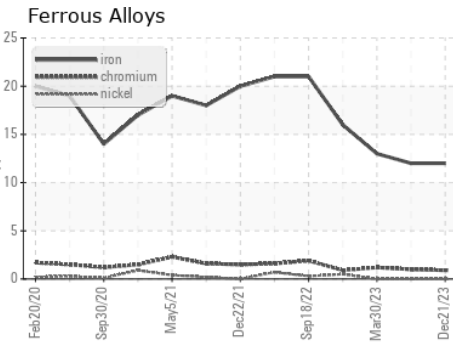

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101191 **Received** : 16 Jan 2024  
**Lab Number** : **06060615** **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831997 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**McLane Company - High Plains - 600HP**  
 1717 East Loop 289  
 LUBBOCK, TX  
 US 79403  
 Contact: RITA GARCIA  
 rita.garcia@mcclaneco.com  
 T: (806)766-2902  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)