




OIL ANALYSIS REPORT

Sample Rating Trend

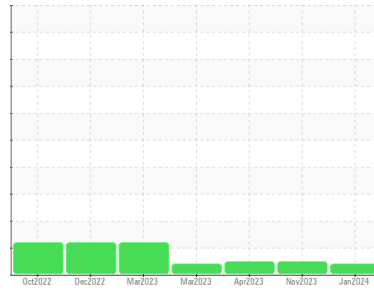

VISCOSITY



Machine Id
225069-23

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0100221	GFL0100232	GFL0074941
Sample Date	Client Info	10 Jan 2024	15 Nov 2023	04 Apr 2023
Machine Age	hrs	8368	227272	0
Oil Age	hrs	200	0	600
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		ATTENTION	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	56	8	9
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	4	2	<1
Lead	ppm	ASTM D5185m >40	<1	<1	0
Copper	ppm	ASTM D5185m >330	36	0	<1
Tin	ppm	ASTM D5185m >15	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	59	17	71
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	41	65	70
Manganese	ppm	ASTM D5185m 0	6	<1	<1
Magnesium	ppm	ASTM D5185m 1010	528	964	864
Calcium	ppm	ASTM D5185m 1070	1437	1042	1091
Phosphorus	ppm	ASTM D5185m 1150	772	1037	948
Zinc	ppm	ASTM D5185m 1270	895	1231	1126
Sulfur	ppm	ASTM D5185m 2060	2415	3035	2867

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	23	4	5
Sodium	ppm	ASTM D5185m	6	<1	3
Potassium	ppm	ASTM D5185m >20	5	<1	1
Fuel	%	ASTM D3524 >5	1.1	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	6.3	6.2	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.5	17.8	17.8

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.1	13.9	13.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.9	9.2	9.6







OIL ANALYSIS REPORT

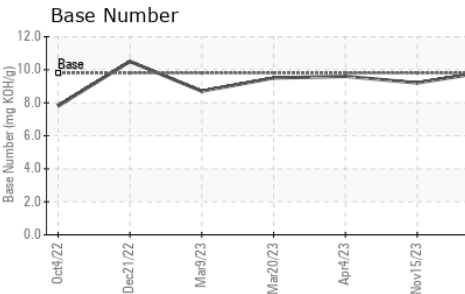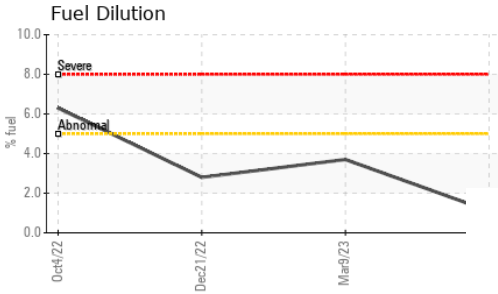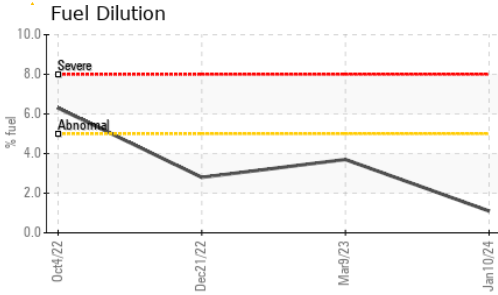

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.1	12.5	13.5

GRAPHS

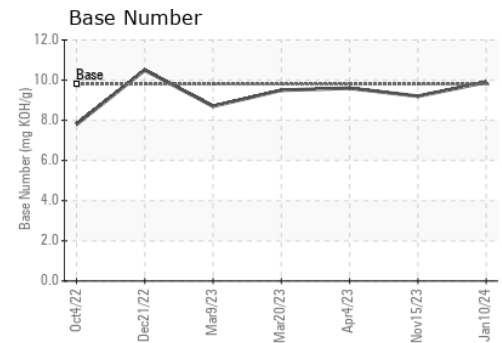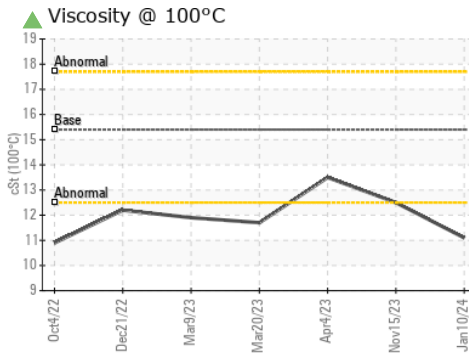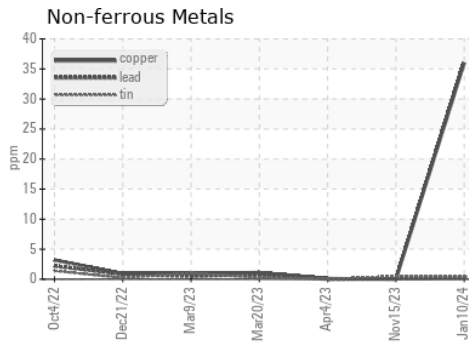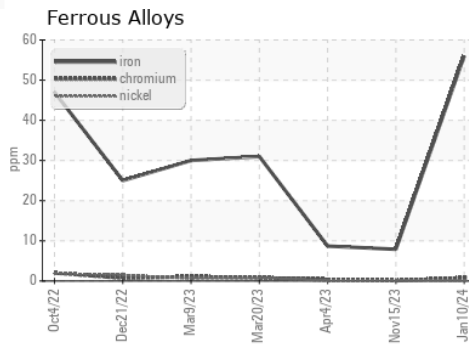

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0100221 **Received** : 16 Jan 2024
Lab Number : 06060703 **Diagnosed** : 18 Jan 2024
Unique Number : 10832085 **Diagnostician** : Don Baldridge
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 166 - Phenix City
 18 Old Brickyard Rd
 Phenix City, AL
 US 36869
 Contact: DEAN PEACE JR
 dean.peace@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: