




PROBLEM SUMMARY

Sample Rating Trend

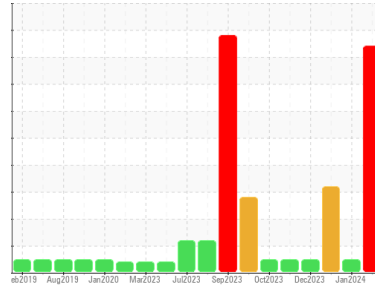

GLYCOL




Machine Id
721024-361461

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

Glycol Contamination

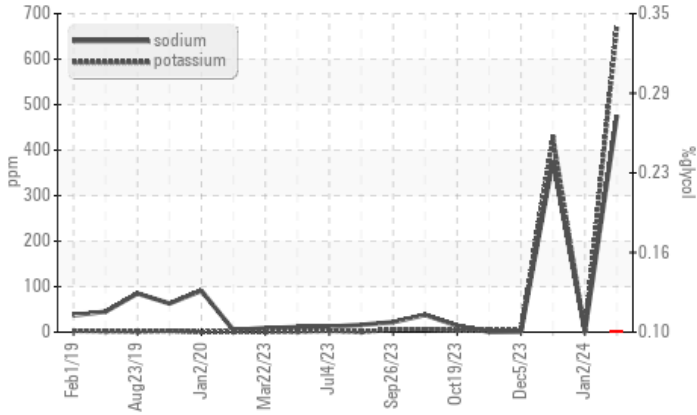

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	ABNORMAL
Sodium	ppm	ASTM D5185m	▲ 476	2	▲ 377
Potassium	ppm	ASTM D5185m >20	▲ 672	0	▲ 427
Glycol	%	*ASTM D2982	● 0.10	NEG	NEG

Customer Id: GFL821
 Sample No.: GFL0105167
 Lab Number: 06060729
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

02 Jan 2024 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



11 Dec 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. The iron level is marginal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



05 Dec 2023 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

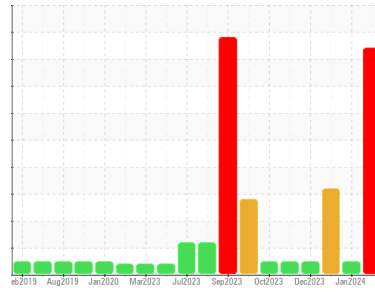

GLYCOL



Machine Id
721024-361461

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0105167	GFL0105149	GFL0090343
Sample Date	Client Info		11 Jan 2024	02 Jan 2024	11 Dec 2023
Machine Age	hrs	Client Info	7312	7190	7055
Oil Age	hrs	Client Info	150	300	600
Oil Changed	Client Info		Not Changed	Not Changed	Changed
Sample Status			SEVERE	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	32	<1	▲ 74
Chromium	ppm	ASTM D5185m >20	2	0	5
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >3	2	0	0
Aluminum	ppm	ASTM D5185m >20	3	<1	4
Lead	ppm	ASTM D5185m >40	2	<1	4
Copper	ppm	ASTM D5185m >330	<1	<1	6
Tin	ppm	ASTM D5185m >15	<1	<1	2
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	6	<1	1
Barium	ppm	ASTM D5185m 0	0	0	11
Molybdenum	ppm	ASTM D5185m 60	173	59	129
Manganese	ppm	ASTM D5185m 0	1	<1	1
Magnesium	ppm	ASTM D5185m 1010	972	978	898
Calcium	ppm	ASTM D5185m 1070	1020	1067	1027
Phosphorus	ppm	ASTM D5185m 1150	1158	1050	995
Zinc	ppm	ASTM D5185m 1270	1297	1252	1183
Sulfur	ppm	ASTM D5185m 2060	3352	3224	3242

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	5	11
Sodium	ppm	ASTM D5185m	▲ 476	2	▲ 377
Potassium	ppm	ASTM D5185m >20	▲ 672	0	▲ 427
Glycol	%	*ASTM D2982	■ 0.10	NEG	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.2	0	1.3
Nitration	Abs/cm	*ASTM D7624 >20	10.3	4.0	11.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.5	17.2	21.3


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.1	12.8	17.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	11.0	9.1	10.0




OIL ANALYSIS REPORT

Glycol Contamination

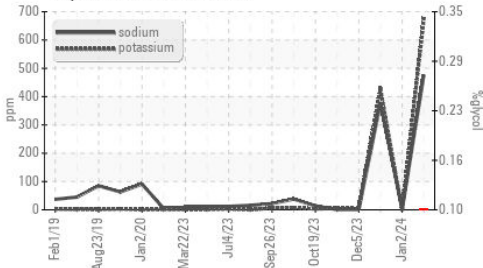

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


Base Number

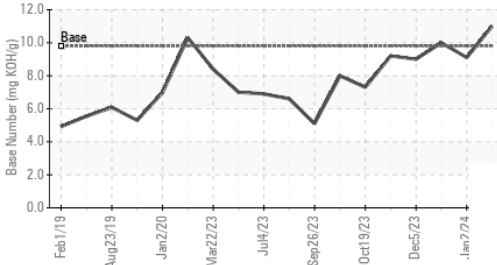


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	14.7

GRAPHS


Ferrous Alloys

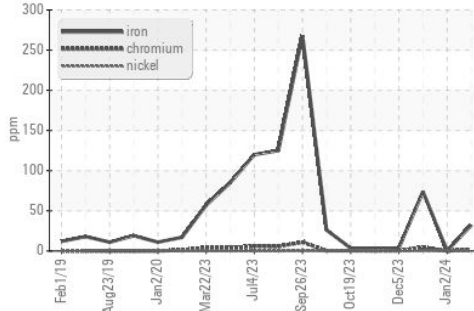


Viscosity @ 100°C

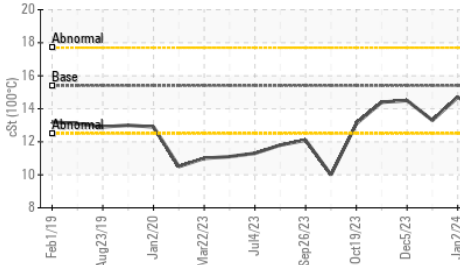


Non-ferrous Metals

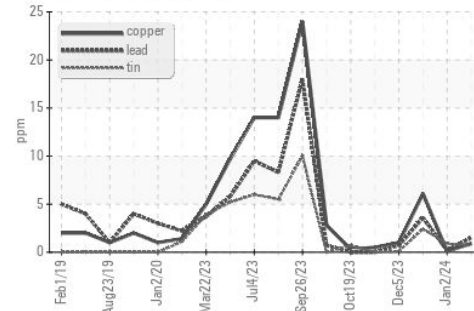

Viscosity @ 100°C

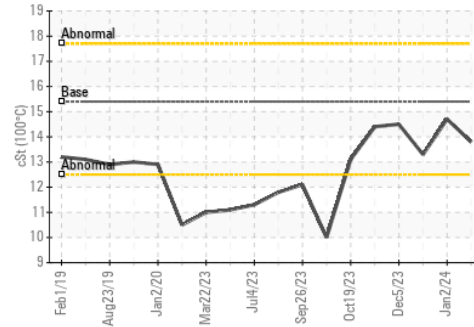

Base Number

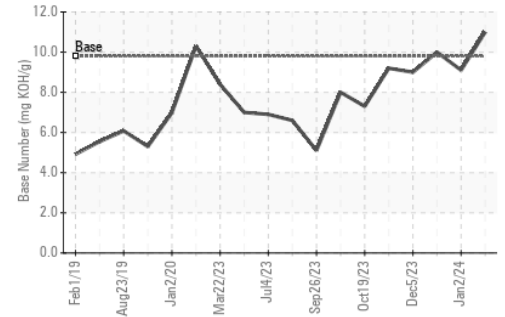

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0105167 Recieved : 16 Jan 2024
 Lab Number : 06060729 Diagnosed : 17 Jan 2024
 Unique Number : 10832111 Diagnostician : Jonathan Hester
 Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 821 - Ozarks Hauling
 33924 Olath Drive
 Lebanon, MO
 US 65536
 Contact: Landen Johnson
 landen.johnson@gflenv.com
 T: (417)664-0010
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)