




# OIL ANALYSIS REPORT

Sample Rating Trend

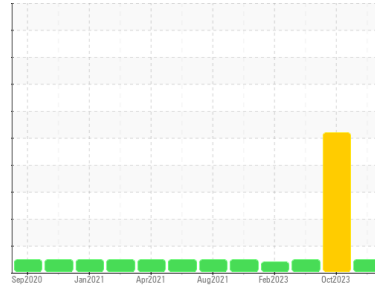

**NORMAL**



Machine Id  
**PACCAR 810037**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (28 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0109102</b>	GFL0086194	GFL0086222
Sample Date	Client Info	<b>11 Jan 2024</b>	23 Oct 2023	02 Aug 2023
Machine Age	hrs	<b>7520</b>	7345	4186
Oil Age	hrs	<b>7520</b>	7345	7107
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>41</b>	83	68
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>11</b>	▲ 46	10
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	16	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	21	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	4	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>18</b>	▲ 45	36
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	▲ <1	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>800</b>	▲ 0	746
Calcium	ppm	ASTM D5185m 1070	<b>1074</b>	▲ 122	1084
Phosphorus	ppm	ASTM D5185m 1150	<b>1010</b>	▲ 225	956
Zinc	ppm	ASTM D5185m 1270	<b>1165</b>	▲ 21	1120
Sulfur	ppm	ASTM D5185m 2060	<b>2812</b>	▲ 880	2715

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>5</b>	9	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	6	0
Potassium	ppm	ASTM D5185m >20	<b>4</b>	3	6
Fuel	%	ASTM D3524 >5	<b>&lt;1.0</b>	1.9	<1.0

## INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.1	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.7</b>	4.8	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.7</b>	34.7	17.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	45.7	12.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.4</b>	▲ 0.0	7.7







# OIL ANALYSIS REPORT

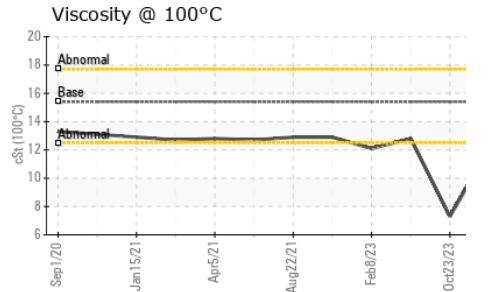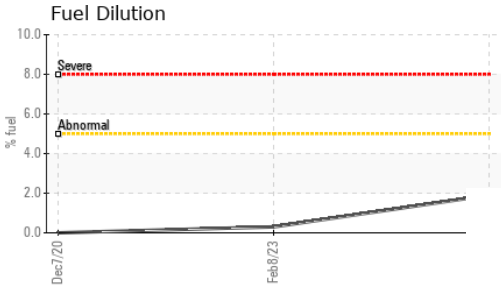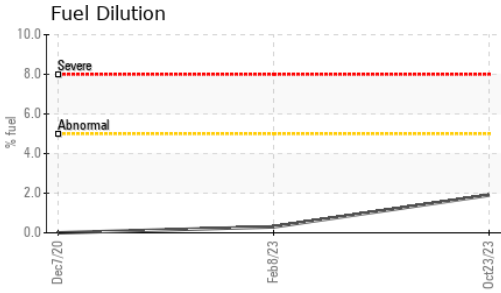

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.1	▲ 7.3	12.8

## GRAPHS

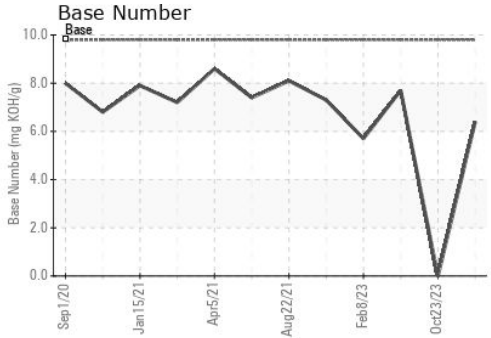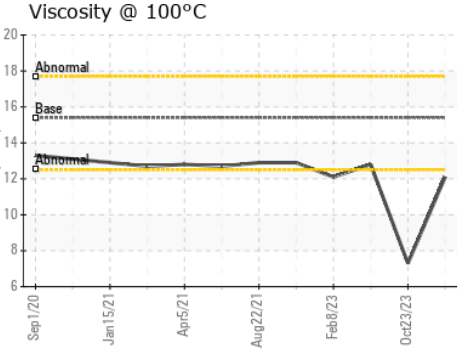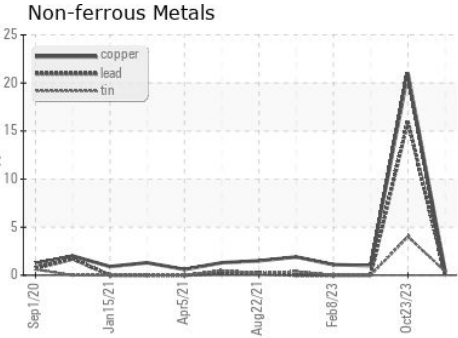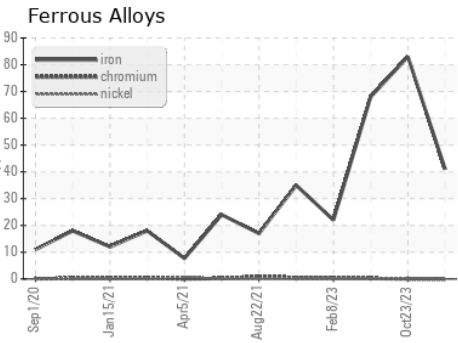

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109102 **Received** : 16 Jan 2024  
**Lab Number** : 06060732 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10832114 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution )

**GFL Environmental - 009 - Fairburn**  
 6905 Roosevelt Hwy  
 Fairburn, GA  
 US 30213  
 Contact: Eric Jones  
 erjones@gflenv.com  
 T: (678)630-9927  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)