



PROBLEM SUMMARY

Sample Rating Trend


WEAR







Machine Id
216002

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 5W30 (--- GAL)

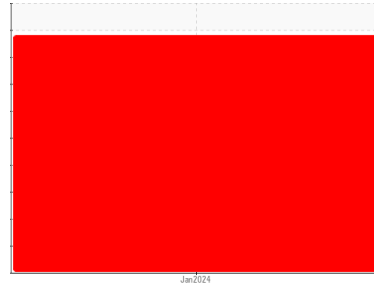

COMPONENT CONDITION SUMMARY

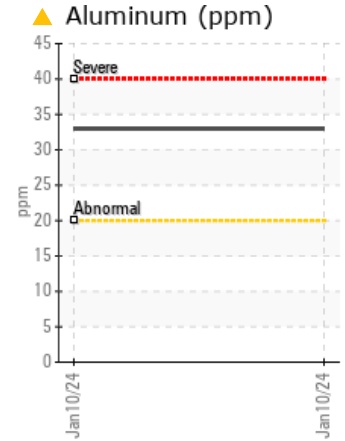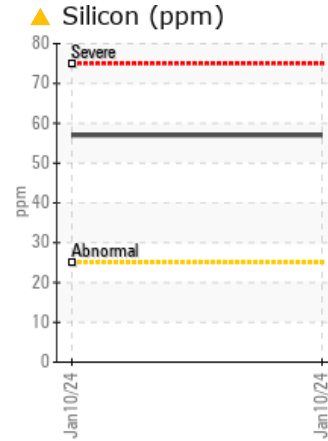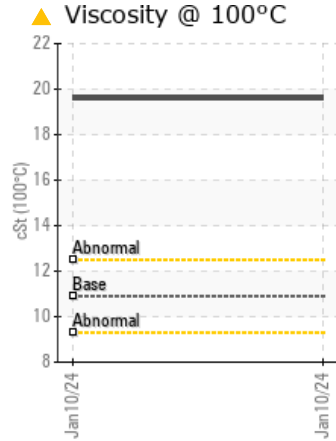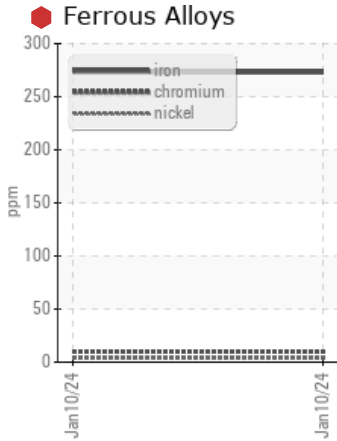

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Iron	ppm	ASTM D5185m	>100	● 273	---	---
Silicon	ppm	ASTM D5185m	>25	▲ 57	---	---
Visc @ 100°C	cSt	ASTM D445	10.9	▲ 19.6	---	---

Customer Id: GFL410
Sample No.: GFL0110014
Lab Number: 06060759
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend


WEAR



Machine Id
216002

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 5W30 (--- GAL)

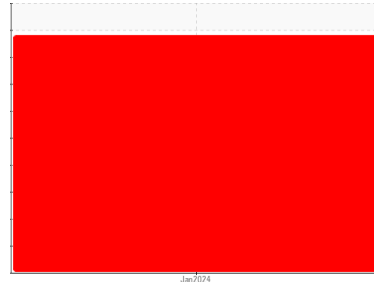

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110014	---	---
Sample Date	Client Info	10 Jan 2024	---	---
Machine Age	hrs	8590	---	---
Oil Age	hrs	600	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		SEVERE	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	---	---
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	273	---	---
Chromium	ppm ASTM D5185m >20	10	---	---
Nickel	ppm ASTM D5185m >4	4	---	---
Titanium	ppm ASTM D5185m	<1	---	---
Silver	ppm ASTM D5185m >3	0	---	---
Aluminum	ppm ASTM D5185m >20	33	---	---
Lead	ppm ASTM D5185m >40	<1	---	---
Copper	ppm ASTM D5185m >330	63	---	---
Tin	ppm ASTM D5185m >15	1	---	---
Vanadium	ppm ASTM D5185m	<1	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	28	---	---
Barium	ppm ASTM D5185m 10	0	---	---
Molybdenum	ppm ASTM D5185m 100	17	---	---
Manganese	ppm ASTM D5185m	13	---	---
Magnesium	ppm ASTM D5185m 450	832	---	---
Calcium	ppm ASTM D5185m 3000	1545	---	---
Phosphorus	ppm ASTM D5185m 1150	788	---	---
Zinc	ppm ASTM D5185m 1350	980	---	---
Sulfur	ppm ASTM D5185m 4250	3055	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	57	---	---
Sodium	ppm ASTM D5185m	35	---	---
Potassium	ppm ASTM D5185m >20	8	---	---

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm *ASTM D7624 >20	30.9	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	46.9	---	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	63.4	---	---
Base Number (BN)	mg KOH/g ASTM D2896 8.5	6.5	---	---



OIL ANALYSIS REPORT







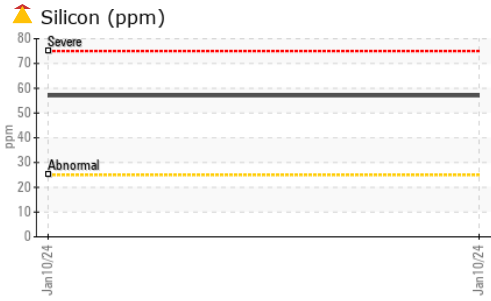


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

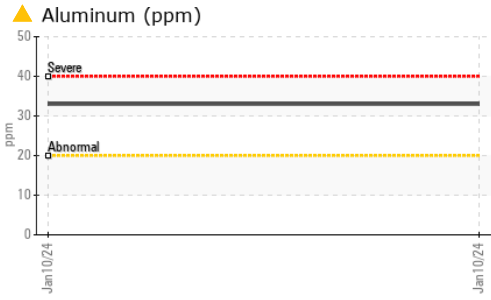

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	▲ 19.6	---

GRAPHS

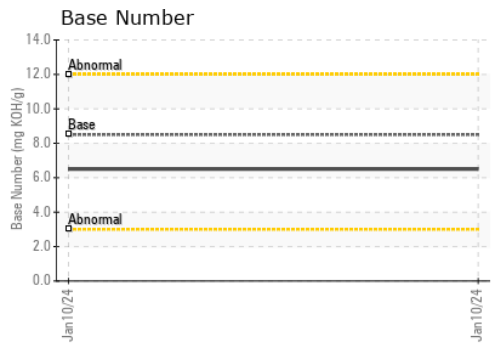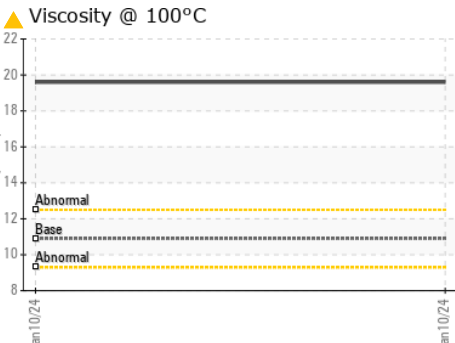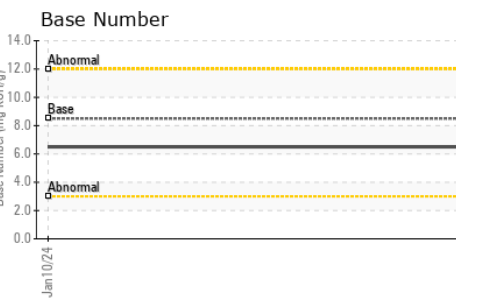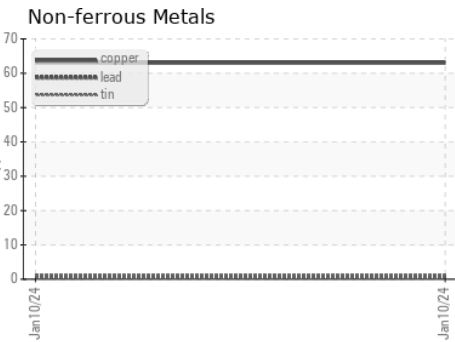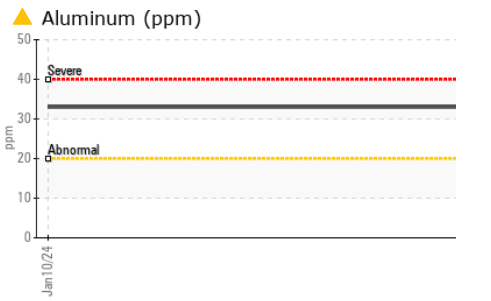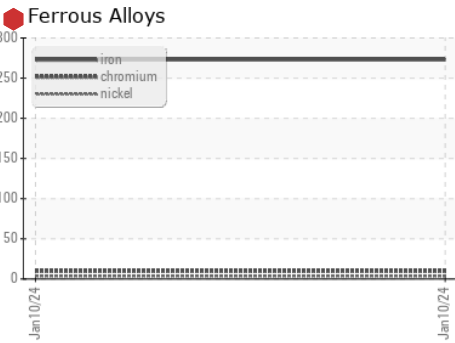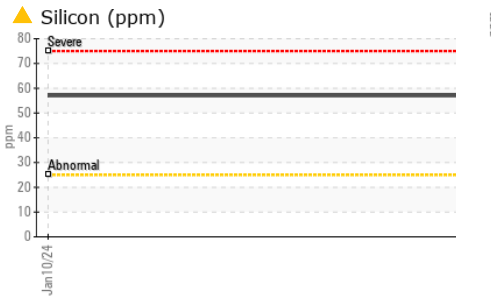

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0110014 Recieved : 16 Jan 2024
 Lab Number : 06060759 Diagnosed : 17 Jan 2024
 Unique Number : 10832141 Diagnostician : Jonathan Hester
 Test Package : FLEET

GFL Environmental - 410 - Michigan West
 39000 Van Born Rd
 Wayne, MI
 US 48184
 Contact: Belal Dgheish
 bdgheish@gflenv.com
 T: (734)714-2340
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)