



# OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



Area  
**(BD49631)**  
Machine Id  
**913186**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**



## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Valve wear is indicated. All other component wear rates are normal.

### Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0041816</b>	---	---
Sample Date	Client Info	<b>01 Nov 2023</b>	---	---
Machine Age	mls	Client Info	<b>0</b>	---
Oil Age	mls	Client Info	<b>600</b>	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---
Glycol	WC Method		<b>NEG</b>	---

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>120	<b>43</b>	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	---
Nickel	ppm	ASTM D5185m	>5	<b>▲ 16</b>	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---
Copper	ppm	ASTM D5185m	>330	<b>96</b>	---
Tin	ppm	ASTM D5185m	>15	<b>4</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>137</b>	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	---
Molybdenum	ppm	ASTM D5185m	60	<b>112</b>	---
Manganese	ppm	ASTM D5185m	0	<b>5</b>	---
Magnesium	ppm	ASTM D5185m	1010	<b>750</b>	---
Calcium	ppm	ASTM D5185m	1070	<b>1363</b>	---
Phosphorus	ppm	ASTM D5185m	1150	<b>777</b>	---
Zinc	ppm	ASTM D5185m	1270	<b>894</b>	---
Sulfur	ppm	ASTM D5185m	2060	<b>2316</b>	---

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>▲ 75</b>	---
Sodium	ppm	ASTM D5185m		<b>2</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	---
Fuel	%	ASTM D3524	>3.0	<b>0.3</b>	---

## INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>4	<b>0.9</b>	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.8</b>	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.5</b>	---


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.2</b>	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.9</b>	---




# OIL ANALYSIS REPORT

### ▲ Ferrous Alloys

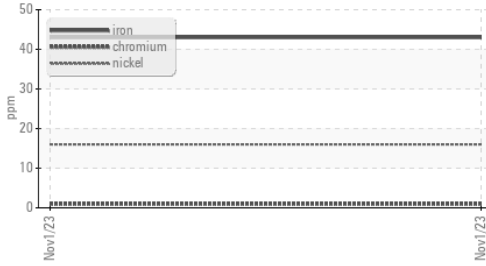

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	---	---
Precipitate	scalar	*Visual	NONE	---	---
Silt	scalar	*Visual	NONE	---	---
Debris	scalar	*Visual	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	---	---
Appearance	scalar	*Visual	NORML	---	---
Odor	scalar	*Visual	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	---	---
Free Water	scalar	*Visual	---	---	---


### Fuel Dilution

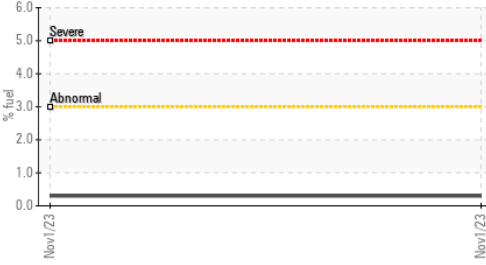


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.6	---

### GRAPHS


#### Iron (ppm)

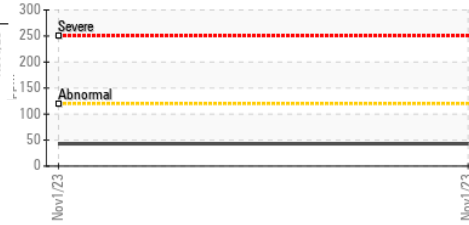


#### Lead (ppm)

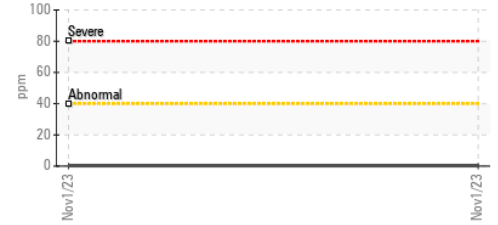


### ▲ Viscosity @ 100°C

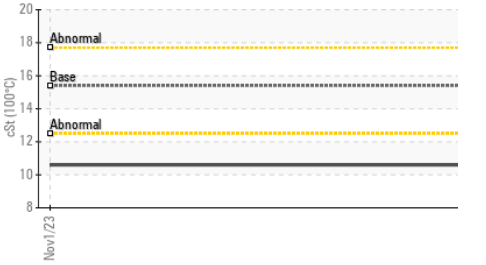


#### Aluminum (ppm)

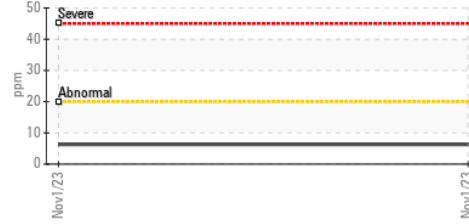


#### Chromium (ppm)

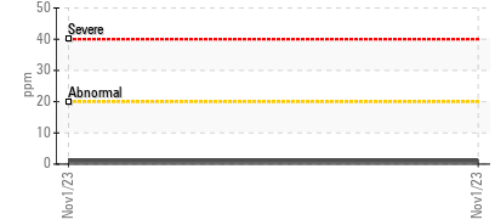


### Fuel Dilution

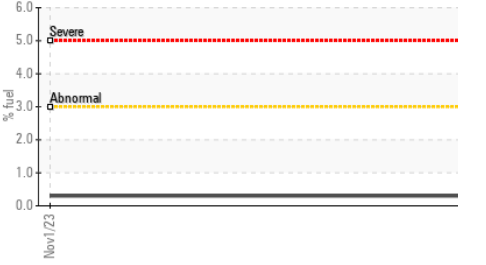


#### Copper (ppm)

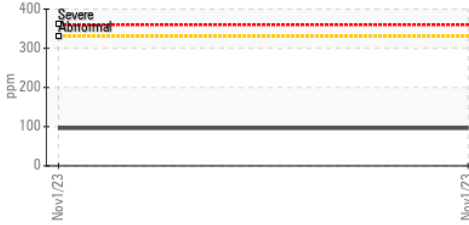

### ▲ Silicon (ppm)

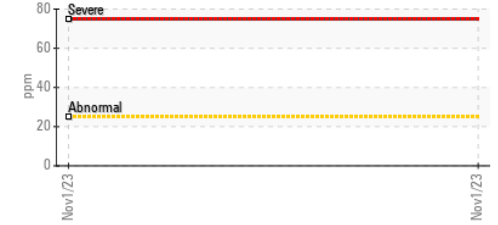

### Base Number

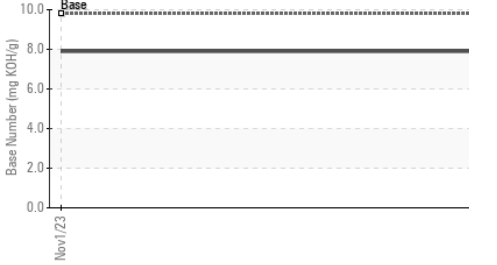

### ▲ Viscosity @ 100°C



### Base Number



Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0041816 **Received** : 16 Jan 2024  
**Lab Number** : 06060772 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10832154 **Diagnostician** : Don Baldrige  
**Test Package** : MOB1+ ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 461 - Smith Hauling**  
 3239 W. M 28  
 Brimley, MI  
 US 49715  
 Contact: Jim Smith  
 jim.smith@gflenv.com  
 T: (906)635-3380  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)