




OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION



Area
GFL035
Machine Id
834018
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (42 QTS)

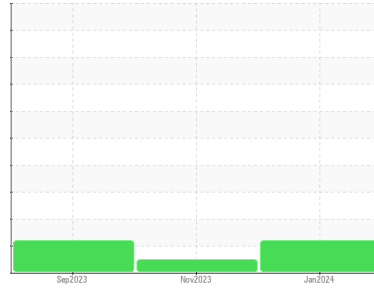

DIAGNOSIS

Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0085232	GFL0102295	GFL0071609
Sample Date	Client Info	15 Jan 2024	17 Nov 2023	26 Sep 2023
Machine Age	hrs	1805	0	0
Oil Age	hrs	146	300	600
Oil Changed	Client Info	N/A	Not Changd	Changed
Sample Status		ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	34	19	37
Chromium	ppm ASTM D5185m >20	1	<1	<1
Nickel	ppm ASTM D5185m >5	1	<1	1
Titanium	ppm ASTM D5185m >2	0	<1	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >20	6	2	2
Lead	ppm ASTM D5185m >40	8	<1	2
Copper	ppm ASTM D5185m >330	5	4	15
Tin	ppm ASTM D5185m >15	3	<1	2
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	5	6	3
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	65	55	55
Manganese	ppm ASTM D5185m 0	4	2	12
Magnesium	ppm ASTM D5185m 1010	704	562	806
Calcium	ppm ASTM D5185m 1070	1790	1628	1356
Phosphorus	ppm ASTM D5185m 1150	873	678	683
Zinc	ppm ASTM D5185m 1270	1089	967	936
Sulfur	ppm ASTM D5185m 2060	2481	2429	2271

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	11	9	25
Sodium	ppm ASTM D5185m	12	6	4
Potassium	ppm ASTM D5185m >20	7	4	6

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0	0	0
Nitration	Abs/cm *ASTM D7624 >20	13.5	11.9	12.7
Sulfation	Abs/.1mm *ASTM D7415 >30	28.8	22.0	23.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	24.9	18.9	22.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ 2.6	4.3	▲ 3.1







OIL ANALYSIS REPORT

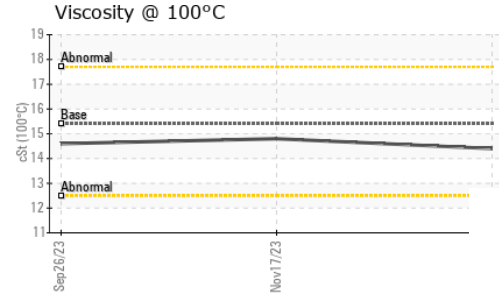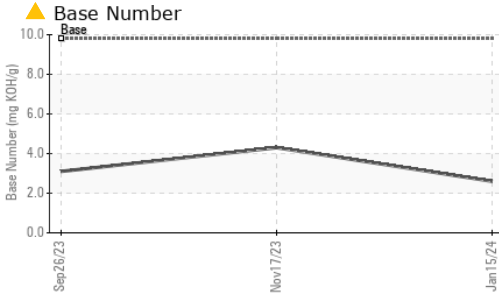

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	14.8

GRAPHS

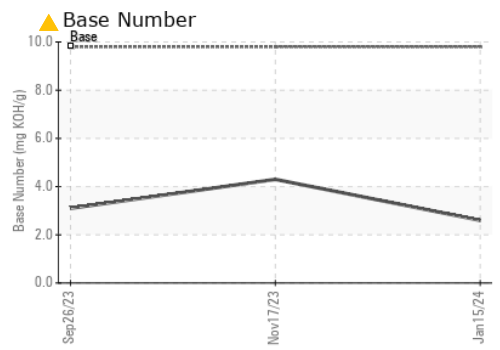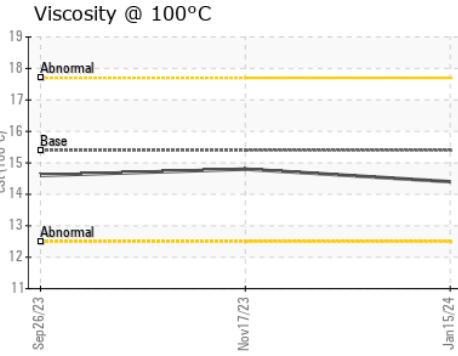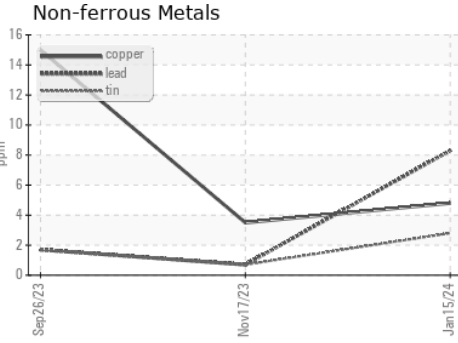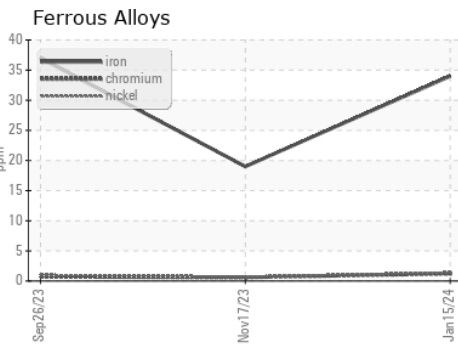

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0085232 **Received** : 16 Jan 2024
Lab Number : **06060819** **Diagnosed** : 17 Jan 2024
Unique Number : 10832201 **Diagnostician** : Jonathan Hester
Test Package : FLEET

GFL Environmental - 035 - Greensboro
 1236 Elon Place
 High Point, NC
 US 27263
 Contact: JORGE COSTA
 jorge.costa@gflenv.com
 T: (336)668-3712
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)