




OIL ANALYSIS REPORT

Sample Rating Trend

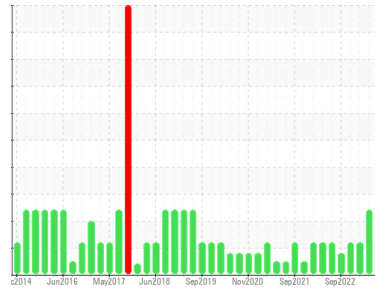

FUEL



Area
(YA122655) GFL035
Machine Id
2583
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0085227	GFL0071568	GFL0053185
Sample Date	Client Info	11 Jan 2024	15 Aug 2023	14 Feb 2023
Machine Age	mls	Client Info	367050	367050
Oil Age	mls	Client Info	600	600
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	4	6	5
Chromium	ppm ASTM D5185m >20	0	0	0
Nickel	ppm ASTM D5185m >2	<1	0	<1
Titanium	ppm ASTM D5185m	0	<1	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >25	2	4	1
Lead	ppm ASTM D5185m >40	<1	0	<1
Copper	ppm ASTM D5185m >330	0	<1	<1
Tin	ppm ASTM D5185m >15	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	28	3	6
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	41	60	63
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	530	927	895
Calcium	ppm ASTM D5185m 1070	1542	1057	1155
Phosphorus	ppm ASTM D5185m 1150	782	994	1015
Zinc	ppm ASTM D5185m 1270	902	1200	1292
Sulfur	ppm ASTM D5185m 2060	2382	3553	3642

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	7	5
Sodium	ppm ASTM D5185m	2	3	2
Potassium	ppm ASTM D5185m >20	1	<1	2
Fuel	% ASTM D3524 >6.0	▲ 3.5	◆ 5.1	▲ 4.4

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.4	0.2	0.9
Nitration	Abs/cm *ASTM D7624 >20	10.5	8.7	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	21.3	18.4	19.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	21.8	15.1	14.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.0	8.0	8.8







OIL ANALYSIS REPORT

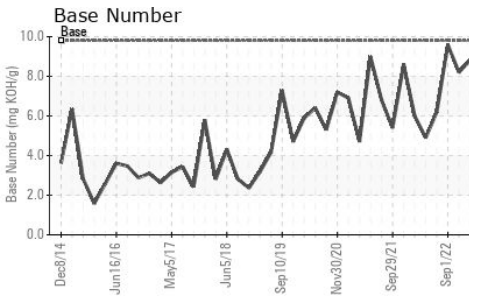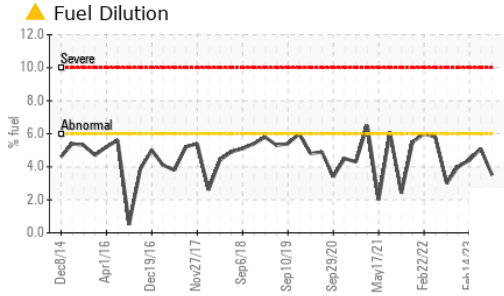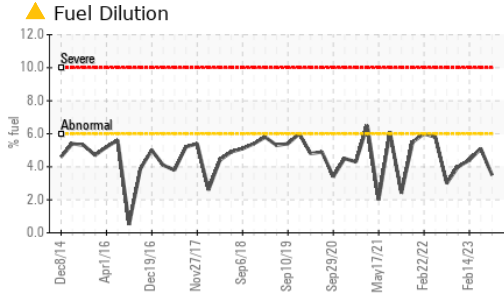

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.3	▲ 12.4

GRAPHS

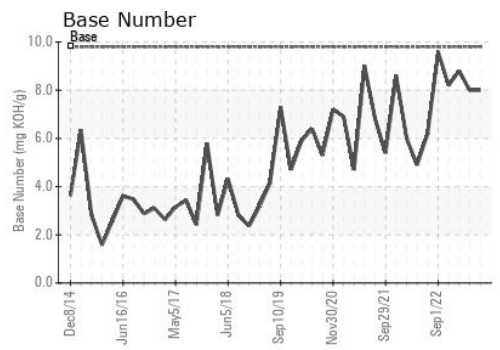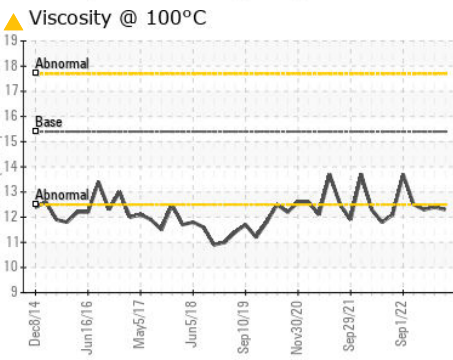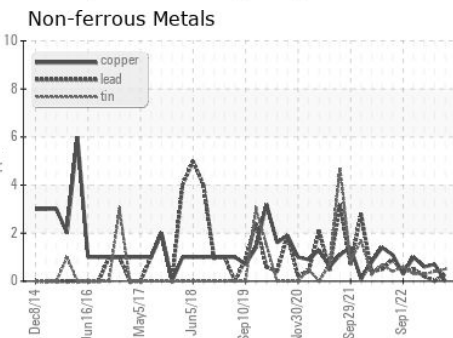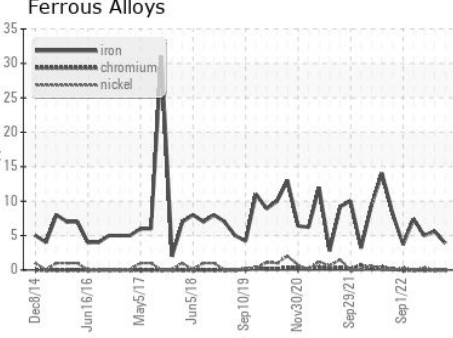

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0085227 **Received** : 16 Jan 2024
Lab Number : 06060830 **Diagnosed** : 18 Jan 2024
Unique Number : 10832212 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 035 - Greensboro
 1236 Elon Place
 High Point, NC
 US 27263
 Contact: JORGE COSTA
 jorge.costa@gflenv.com
 T: (336)668-3712
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)