




# OIL ANALYSIS REPORT

Sample Rating Trend

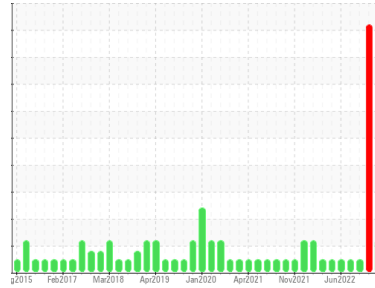

GLYCOL



Area  
**(YA122728) GFL035**

Machine Id  
**3645**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (38 QTS)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0085228</b>	GFL0071615	GFL0053153
Sample Date	Client Info	<b>11 Jan 2024</b>	30 Aug 2023	13 Mar 2023
Machine Age	hrs	<b>11809</b>	11809	11809
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	SEVERE	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>53</b>	16	42
Chromium	ppm ASTM D5185m >5	<b>2</b>	<1	1
Nickel	ppm ASTM D5185m >4	<b>3</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >15	<b>3</b>	2	3
Lead	ppm ASTM D5185m >25	<b>1</b>	<1	<1
Copper	ppm ASTM D5185m >100	<b>75</b>	72	32
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>5</b>	39	16
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>61</b>	49	52
Manganese	ppm ASTM D5185m 0	<b>1</b>	1	3
Magnesium	ppm ASTM D5185m 1010	<b>879</b>	▲ 597	710
Calcium	ppm ASTM D5185m 1070	<b>1101</b>	▲ 1609	1287
Phosphorus	ppm ASTM D5185m 1150	<b>944</b>	777	836
Zinc	ppm ASTM D5185m 1270	<b>1195</b>	998	993
Sulfur	ppm ASTM D5185m 2060	<b>2281</b>	2601	3072

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>8</b>	11	15
Sodium	ppm ASTM D5185m	<b>12</b>	▲ 50	4
Potassium	ppm ASTM D5185m >20	▲ <b>98</b>	▲ 607	0
Glycol	% *ASTM D2982	<b>NEG</b>	◼ 0.10	NEG

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>1.2</b>	0.4	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>12.8</b>	8.0	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>24.7</b>	24.1	21.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>23.3</b>	20.5	17.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>5.1</b>	10.7	6.8







# OIL ANALYSIS REPORT

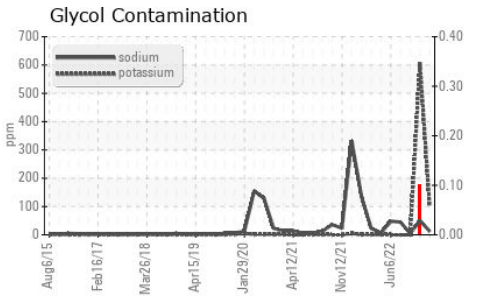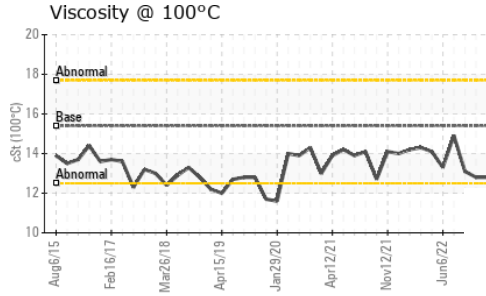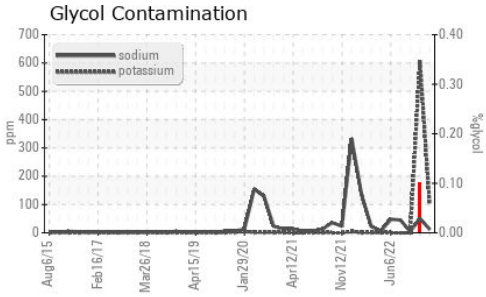

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	13.1

## GRAPHS

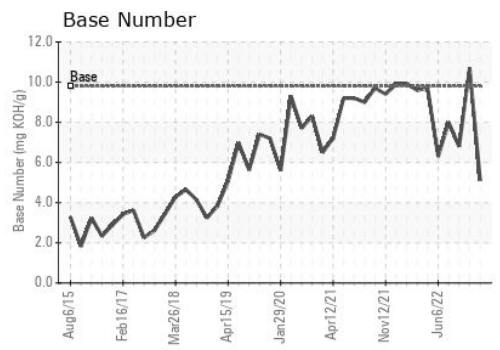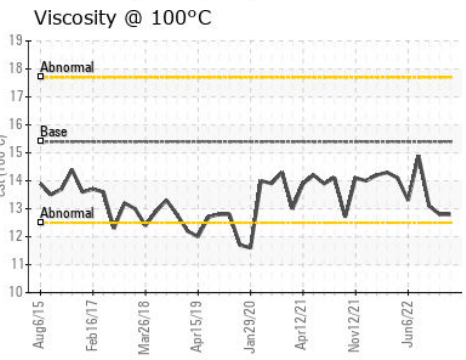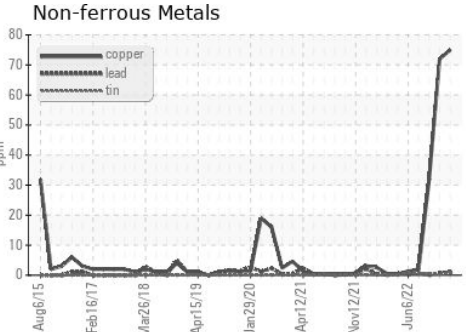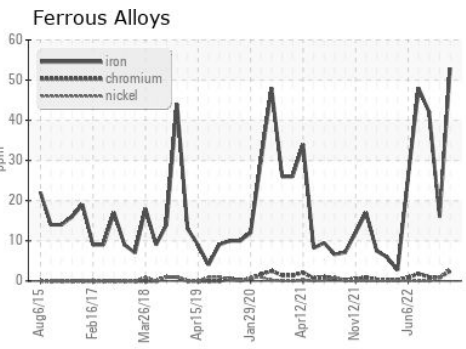

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0085228 **Received** : 16 Jan 2024  
**Lab Number** : **06060831** **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10832213 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 035 - Greensboro**  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)