


# **OIL ANALYSIS REPORT**

Sample Rating Trend



**NORMAL** 



739256

Component **Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (--- Q

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.


### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

QTS)						
	MATION		Jui2023	Dec2023	la la tament	histow.O
SAMPLE INFOR	MATION		limit/base	current	history1	history2
Sample Number		Client Info		PCA0114542	PCA0100778	
Sample Date		Client Info		28 Dec 2023	07 Jul 2023	
Machine Age	mls	Client Info		262261	42658	
Oil Age	mls	Client Info		0	42658	
Oil Changed		Client Info		N/A NORMAL	Changed	
Sample Status					NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method		<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	16	28	
Chromium	ppm	ASTM D5185m	>20	<1	1	
Nickel	ppm	ASTM D5185m	>4	<1	<1	
Titanium	ppm	ASTM D5185m		<1	7	
Silver	ppm	ASTM D5185m	>3	0	0	
Aluminum	ppm	ASTM D5185m	>20	3	4	
Lead	ppm	ASTM D5185m	>40	4	4	
Copper	ppm	ASTM D5185m	>330	0	1	
Tin	ppm	ASTM D5185m	>15	<1	1	
Vanadium Cadmium	ppm	ASTM D5185m		0	<1 0	
	ppm	ASTM D5185m	11 10 11			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	5	4	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	50	61	59	
Manganese	ppm	ASTM D5185m	0	<1	<1	
Magnesium	ppm	ASTM D5185m	950	860	955	
Calcium	ppm	ASTM D5185m	1050	1249	1243	
Phosphorus Zinc	ppm	ASTM D5185m ASTM D5185m	995 1180	1090 1299	1028 1280	
Sulfur	ppm	ASTM D5185m	2600	2955	3410	
CONTAMINAN		method	limit/base	current	history1	history2
Silicon		ASTM D5185m			8	
Sodium	ppm	ASTM D5185m	>25	8 <1	3	
Potassium	ppm	ASTM D5185m	>20	4	11	
INFRA-RED	PP					hiotory?
	0/	method	limit/base	current	history1	history2
Soot % Nitration	% Abs/cm	*ASTM D7844 *ASTM D7624	>3 >20	0.4	0.4 11.3	
Sulfation	Abs/.1mm	*ASTM D7624	>20	10.3 23.3	24.3	
FLUID DEGRAI	NOITAC		limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.1	22.1	
Base Number (BN)	mg KOH/g	ASTM D2896		5.6	5.5	



## **OIL ANALYSIS REPORT**

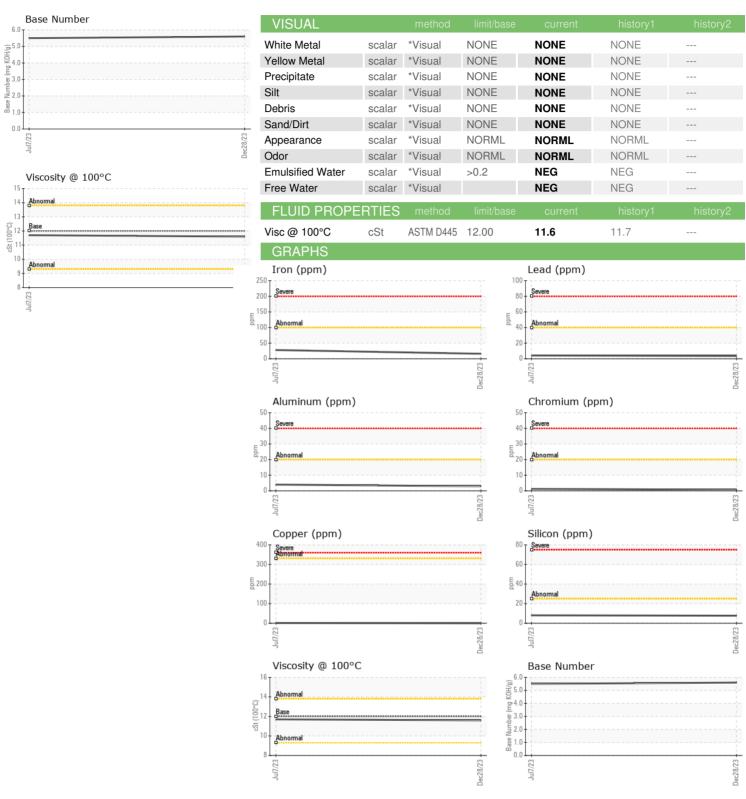





Laboratory Sample No. Lab Number **Unique Number** 

: PCA0114542 : 06060920 : 10832302

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved Diagnosed

: 17 Jan 2024 Diagnostician : Wes Davis

: 16 Jan 2024

Test Package : MOB 1 ( Additional Tests: TBN ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**MILLER TRUCK LEASING #118** 

2196 BENNETT ROAD PHILADELPHIA, PA US 19116

Contact: ROSTY VITER rviter@millertransgroup.com T: (215)552-9832

Contact/Location: ROSTY VITER - MILPHINE

F: (215)552-9892