




# OIL ANALYSIS REPORT

Sample Rating Trend

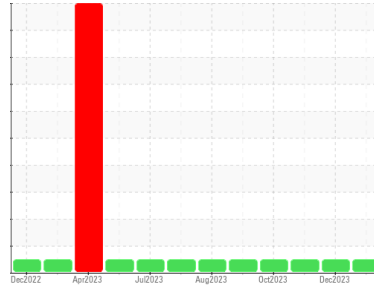

**NORMAL**



Machine Id  
**812039**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0102979</b>	GFL0086411	GFL0086402
Sample Date	Client Info			<b>15 Jan 2024</b>	14 Dec 2023	19 Nov 2023
Machine Age	hrs	Client Info		<b>4311</b>	4151	3993
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>6</b>	3	8
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	2	4
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>85	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>15</b>	17	2
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>58</b>	56	64
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>857</b>	838	945
Calcium	ppm	ASTM D5185m	3000	<b>1241</b>	1140	1195
Phosphorus	ppm	ASTM D5185m	1150	<b>1063</b>	1067	1101
Zinc	ppm	ASTM D5185m	1350	<b>1273</b>	1248	1336
Sulfur	ppm	ASTM D5185m	4250	<b>3264</b>	3288	3300



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>4</b>	3	5
Sodium	ppm	ASTM D5185m	>216	<b>&lt;1</b>	1	1
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.8</b>	5.8	8.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.3</b>	17.9	19.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.1</b>	13.7	15.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.1</b>	8.6	7.9







# OIL ANALYSIS REPORT

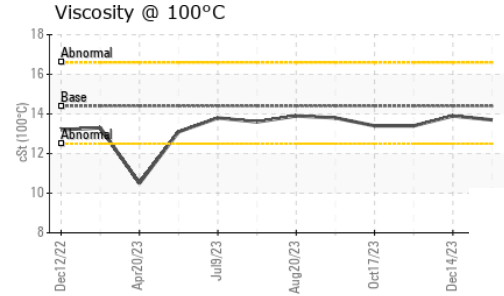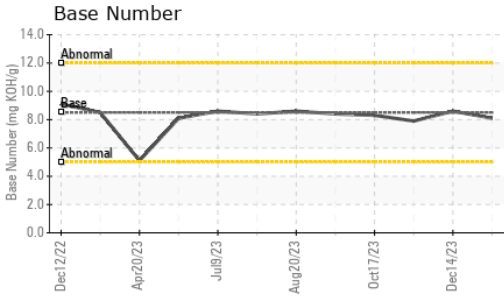

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.7</b>	13.9	13.4

## GRAPHS

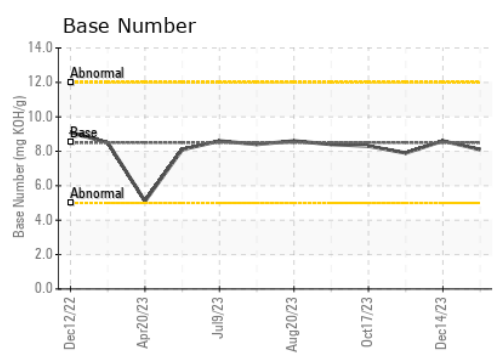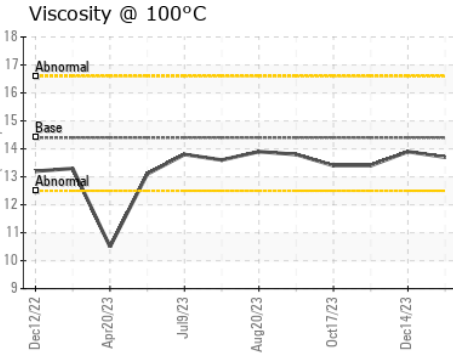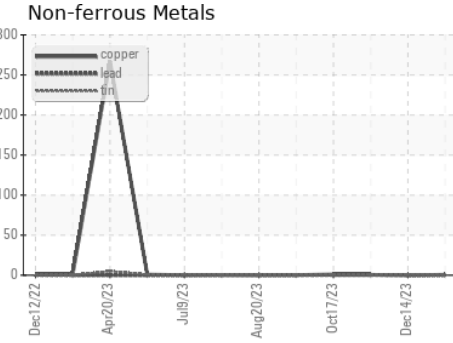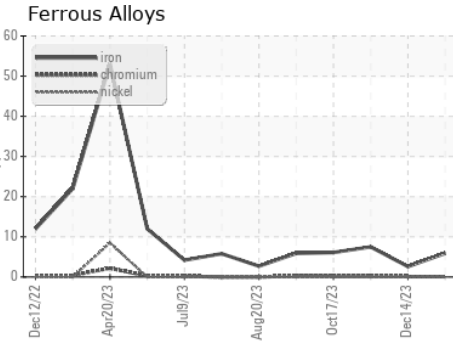

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0102979 **Received** : 16 Jan 2024  
**Lab Number** : 06061643 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10833025 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 816 - WCA of South Arkansas**  
 3083 Smackover Hwy  
 El Dorado, AR  
 US 71730  
 Contact: Mike Howell  
 mike.howell@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)