




OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION



Area
(34736UA)
Machine Id
426034-4678
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

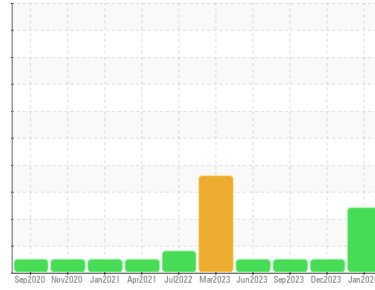

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The BN level is low.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0101317	GFL0045475	GFL0091818
Sample Date	Client Info	10 Jan 2024	12 Dec 2023	29 Sep 2023
Machine Age	hrs	39747	39533	530735
Oil Age	hrs	0	0	530735
Oil Changed	Client Info	Not Chngd	Not Chngd	N/A
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	50	40	19
Chromium	ppm ASTM D5185m >20	1	1	<1
Nickel	ppm ASTM D5185m >5	0	<1	0
Titanium	ppm ASTM D5185m >2	<1	<1	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	2	2	0
Lead	ppm ASTM D5185m >40	2	2	2
Copper	ppm ASTM D5185m >330	3	2	1
Tin	ppm ASTM D5185m >15	<1	<1	<1
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	10	1	2
Barium	ppm ASTM D5185m 0	0	12	0
Molybdenum	ppm ASTM D5185m 60	62	59	57
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	936	928	992
Calcium	ppm ASTM D5185m 1070	1070	1010	1060
Phosphorus	ppm ASTM D5185m 1150	1006	973	1024
Zinc	ppm ASTM D5185m 1270	1195	1191	1256
Sulfur	ppm ASTM D5185m 2060	2860	3117	3179

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	6	5	4
Sodium	ppm ASTM D5185m	1	0	<1
Potassium	ppm ASTM D5185m >20	1	3	0
Fuel	% ASTM D3524 >3.0	<1.0	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	▲ 5.3	3.5	1.3
Nitration	Abs/cm *ASTM D7624 >20	15.1	8.4	5.9
Sulfation	Abs/.1mm *ASTM D7415 >30	30.9	23.2	19.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	23.1	13.2	12.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ 0.0	6.4	9.2







OIL ANALYSIS REPORT

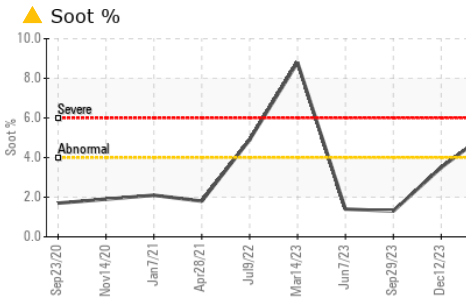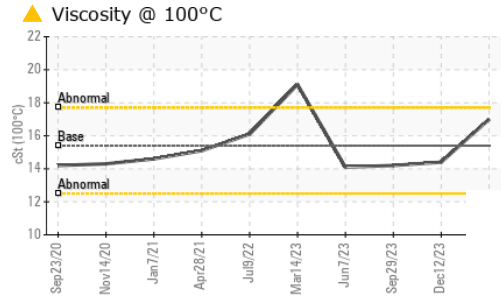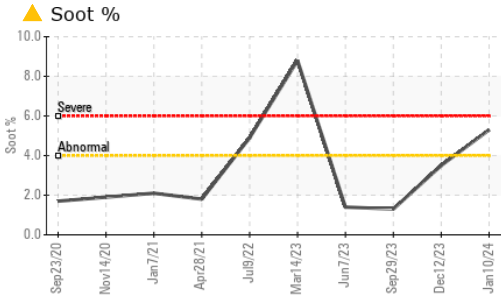

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 17.0	14.4	14.2

GRAPHS

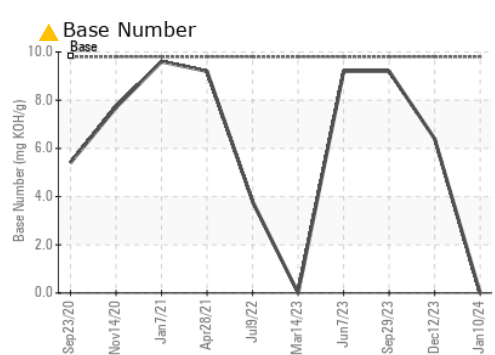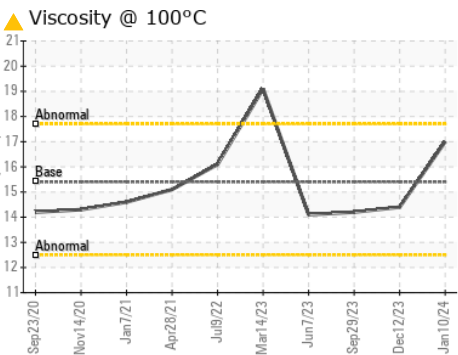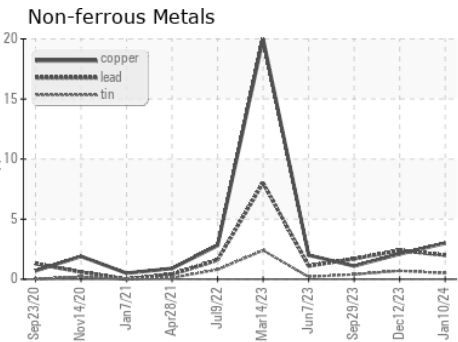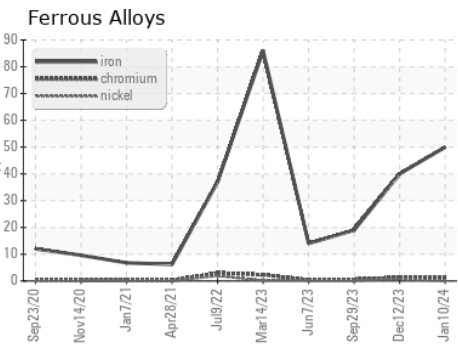

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0101317 **Received** : 16 Jan 2024
Lab Number : 06061655 **Diagnosed** : 17 Jan 2024
Unique Number : 10833037 **Diagnostician** : Don Baldrige

GFL Environmental - 654 - Richmond Hauling
 11800 Lewis Road
 Chester, VA
 US 23831
 Contact: Jimmy Mayes
 jmayes@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)