




OIL ANALYSIS REPORT

Sample Rating Trend

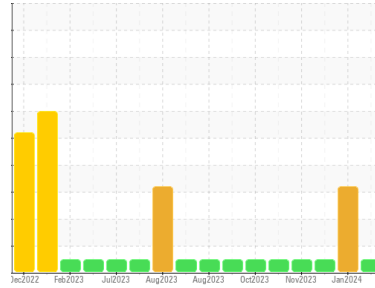

NORMAL



Machine Id
429052-402457

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: resample)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0103516	GFL0103506	GFL0094778	
Sample Date	Client Info	11 Jan 2024	03 Jan 2024	14 Dec 2023	
Machine Age	hrs	Client Info	11725	11691	11567
Oil Age	hrs	Client Info	551	517	393
Oil Changed	Client Info	N/A	N/A	Not Chngd	
Sample Status		NORMAL	ABNORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	12	55	27
Chromium	ppm ASTM D5185m >4	2	▲ 9	4
Nickel	ppm ASTM D5185m >2	0	<1	<1
Titanium	ppm ASTM D5185m	0	1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >25	2	▲ 7	5
Lead	ppm ASTM D5185m >45	0	3	<1
Copper	ppm ASTM D5185m >85	<1	3	2
Tin	ppm ASTM D5185m >4	0	1	<1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	19	11	11
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	81	95	87
Manganese	ppm ASTM D5185m 0	<1	1	<1
Magnesium	ppm ASTM D5185m 1010	860	981	904
Calcium	ppm ASTM D5185m 1070	1023	1145	1075
Phosphorus	ppm ASTM D5185m 1150	991	908	1041
Zinc	ppm ASTM D5185m 1270	1166	1304	1218
Sulfur	ppm ASTM D5185m 2060	2967	2789	3411

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	7	▲ 35	17
Sodium	ppm ASTM D5185m	2	2	4
Potassium	ppm ASTM D5185m >20	9	13	11

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	5.8	10.4	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	18.0	21.7	20.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.0	18.9	17.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.5	6.8	7.2







OIL ANALYSIS REPORT

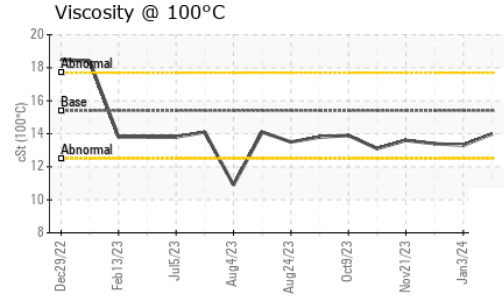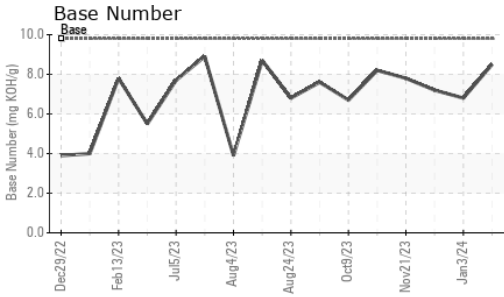

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.3	13.4

GRAPHS

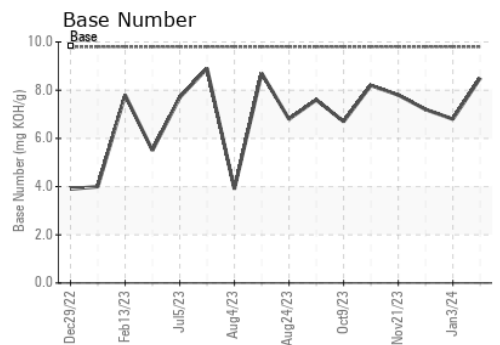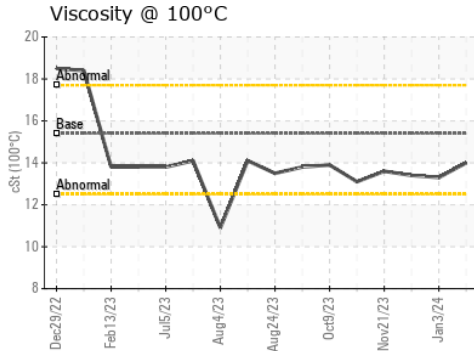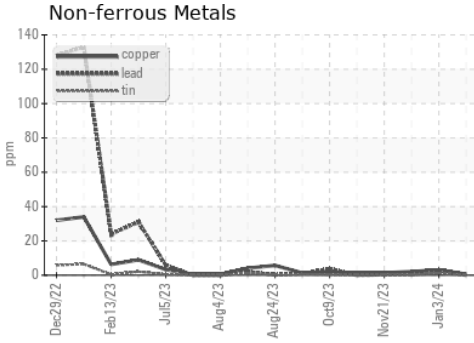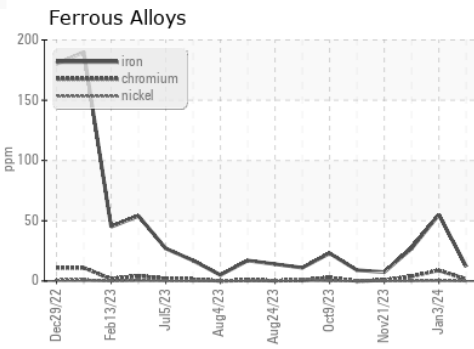

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103516 **Received** : 17 Jan 2024
Lab Number : **06062327** **Diagnosed** : 18 Jan 2024
Unique Number : 10833709 **Diagnostician** : Sean Felton
Test Package : FLEET

GFL environmental - 867 - Trafford (Blount Hauling)
 1130 County Line Rd
 Trafford, AL
 US 35172
 Contact: Jonathan Williams
 jonathan.williams@gflenv.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)