


OIL ANALYSIS REPORT



GLYCOL

Machine Id 201 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- 0

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

AL)			Dec2023			
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0114036		
Sample Date		Client Info		19 Dec 2023		
Machine Age	mls	Client Info		18575		
Oil Age	mls	Client Info		18575		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
-uel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
WEAR METAL	C	method	limit/base	current	history1	history2
	٥_				HISTORY	HISTOLYZ
Iron	ppm	ASTM D5185m	>100	36		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	14		
Lead	ppm	ASTM D5185m	>40	<1		
Copper	ppm	ASTM D5185m	>330	12		
Γin	ppm	ASTM D5185m	>15	1		
√anadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	20		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	16		
Manganese	ppm	ASTM D5185m	0	2		
Magnesium	ppm	ASTM D5185m	950	818		
Calcium	ppm	ASTM D5185m	1050	1375		
Phosphorus	ppm	ASTM D5185m	995	828		
Zinc	ppm	ASTM D5185m	1180	957		
Sulfur	ppm	ASTM D5185m	2600	3049		
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	23		
Sodium	ppm	ASTM D5185m		16		
Potassium	ppm	ASTM D5185m	>20	<u>^</u> 51		
01 1						
JIYCOI	%	*ASTM D2982		NEG		
INFRA-RED	%	*ASTM D2982	limit/base	NEG current	history1	history2
INFRA-RED		method		current	history1	history2
INFRA-RED	%	method *ASTM D7844	>3	current 0.3	history1	
Soot % Nitration	% Abs/cm	method *ASTM D7844 *ASTM D7624	>3 >20	0.3 10.6	history1	history2
INFRA-RED Soot % Nitration Sulfation	% Abs/cm Abs/.1mm	method *ASTM D7844 *ASTM D7624 *ASTM D7415	>3 >20 >30	current 0.3 10.6 23.6	history1	history2
INFRA-RED Soot % Nitration Sulfation FLUID DEGRA	% Abs/cm Abs/.1mm DATION	method *ASTM D7844 *ASTM D7624 *ASTM D7415 method	>3 >20 >30 limit/base	current 0.3 10.6 23.6 current	history1	history2
INFRA-RED Soot % Nitration Sulfation	% Abs/cm Abs/.1mm	method *ASTM D7844 *ASTM D7624 *ASTM D7415	>3 >20 >30	current 0.3 10.6 23.6	history1	history2



OIL ANALYSIS REPORT

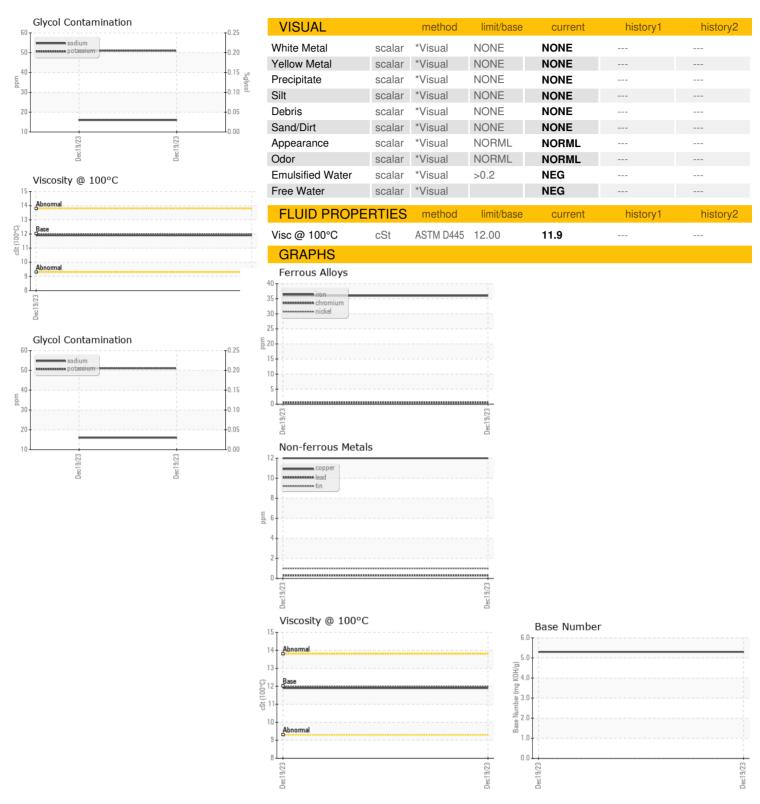





Certificate L2367

Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Unique Number

: 06062347 : 10833729

: PCA0114036 Recieved Diagnosed

: 17 Jan 2024 : 18 Jan 2024 : Jonathan Hester Diagnostician

Test Package : FLEET (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **BLUE MAX TRUCKING**

1015 E. WESTINGHOUSE BLVD. CHARLOTTE, NC

US 28273 Contact: Jody Greer

jgreer@bluemaxtrucking.com

T: (980)225-9968 F: (704)588-2901