


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

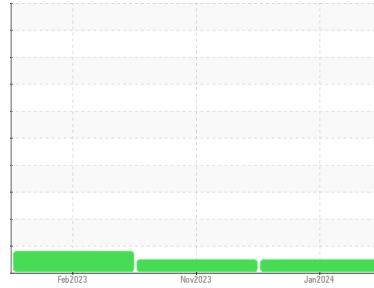

Area  
**(51457Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A63350**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0103499</b>	PCA0103502	PCA0090389
Sample Date	Client Info		<b>02 Jan 2024</b>	13 Nov 2023	27 Feb 2023
Machine Age	mls	Client Info	<b>167637</b>	142696	45885
Oil Age	mls	Client Info	<b>60000</b>	36446	45885
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>34</b>	19	40
Chromium	ppm	ASTM D5185m >5	<b>3</b>	2	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>18</b>	10	51
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185m >150	<b>55</b>	48	▲ 170
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	3
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>&lt;1</b>	<1	26
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	59	47
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	4
Magnesium	ppm	ASTM D5185m 950	<b>1065</b>	974	598
Calcium	ppm	ASTM D5185m 1050	<b>1203</b>	1133	1688
Phosphorus	ppm	ASTM D5185m 995	<b>1003</b>	1025	725
Zinc	ppm	ASTM D5185m 1180	<b>1357</b>	1229	939
Sulfur	ppm	ASTM D5185m 2600	<b>2204</b>	2099	2019

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	5	6
Sodium	ppm	ASTM D5185m	<b>2</b>	2	5
Potassium	ppm	ASTM D5185m >20	<b>39</b>	22	122



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.3</b>	9.6	10.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.3</b>	21.5	22.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.9</b>	19.6	23.2
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.4</b>	6.9	7.8





# OIL ANALYSIS REPORT

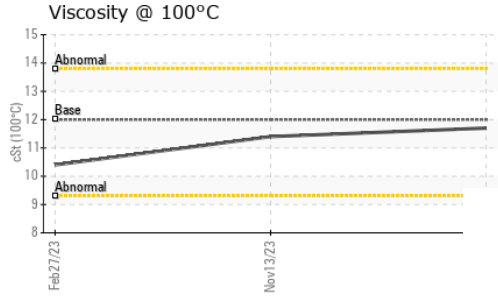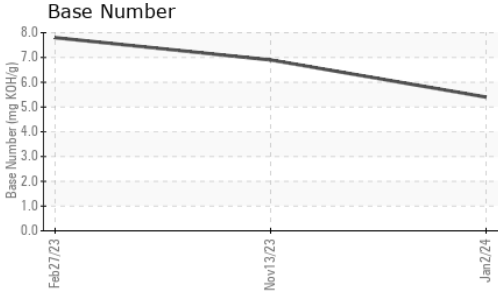

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.7	11.4

## GRAPHS

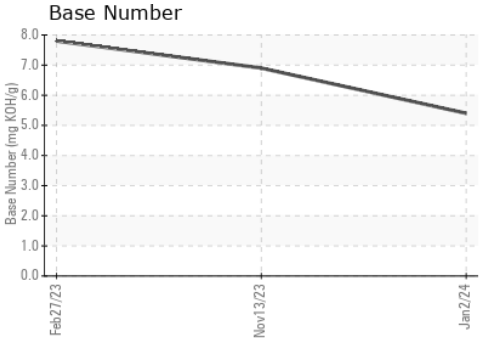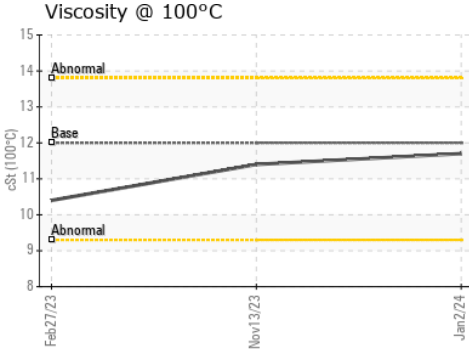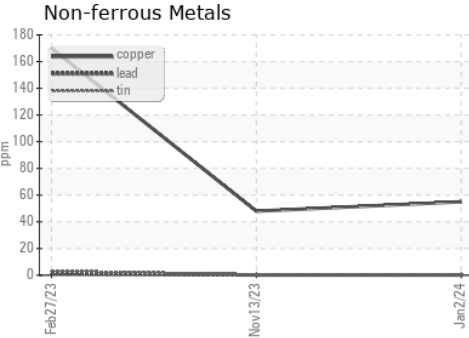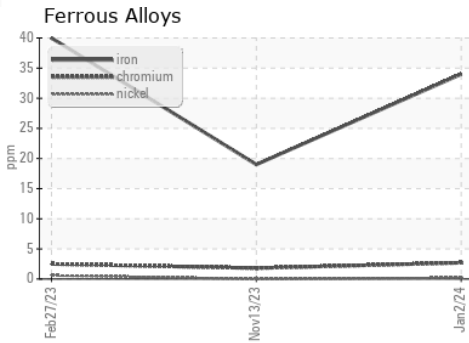

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0103499 **Received** : 17 Jan 2024  
**Lab Number** : 06062449 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10833831 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1369 - Berkeley-Waxahachie**  
 710 Ovilla Road  
 Waxahachie, TX  
 US 75167  
 Contact: Robert Beal  
 rbeal@transervice.com  
 T: (972)923-9928  
 F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)