


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

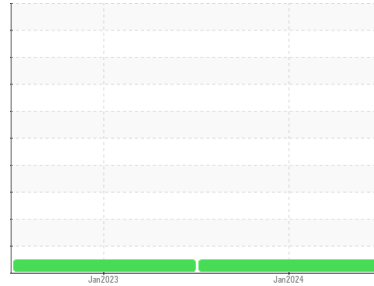

Area  
**(97162X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A62073**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0103500</b>	PCA0087996	---
Sample Date	Client Info			<b>03 Jan 2024</b>	04 Jan 2023	---
Machine Age	mls	Client Info		<b>602440</b>	509766	---
Oil Age	mls	Client Info		<b>60000</b>	40000	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>33</b>	20	---
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>12</b>	9	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>150	<b>4</b>	4	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>3</b>	0	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m	50	<b>67</b>	62	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>987</b>	963	---
Calcium	ppm	ASTM D5185m	1050	<b>1150</b>	1091	---
Phosphorus	ppm	ASTM D5185m	995	<b>963</b>	988	---
Zinc	ppm	ASTM D5185m	1180	<b>1238</b>	1242	---
Sulfur	ppm	ASTM D5185m	2600	<b>2693</b>	2608	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>7</b>	5	---
Sodium	ppm	ASTM D5185m		<b>1</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	4	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.1</b>	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.4</b>	21.5	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.7</b>	17.6	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.8</b>	6.9	---





# OIL ANALYSIS REPORT

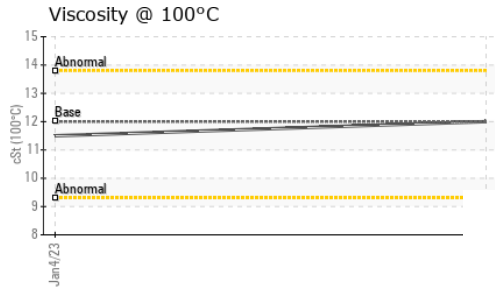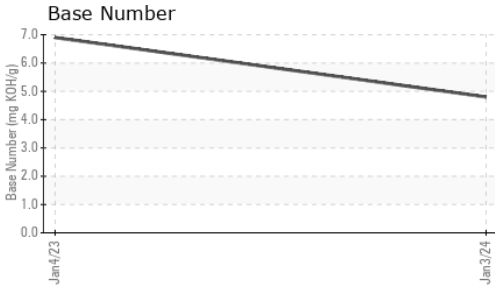

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.0	11.5

## GRAPHS

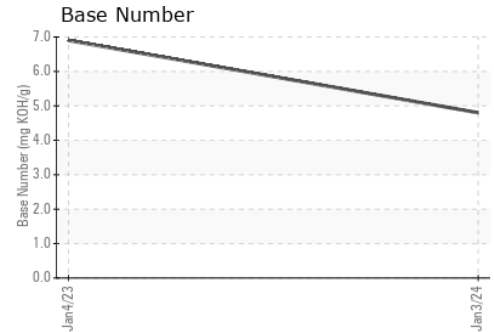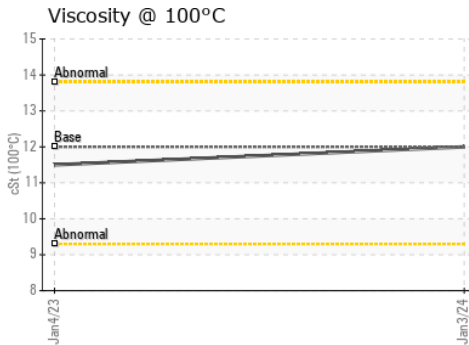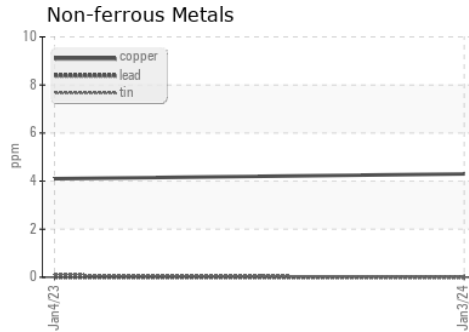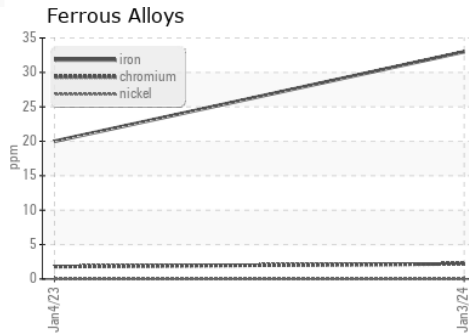

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0103500 **Recieved** : 17 Jan 2024  
**Lab Number** : 06062451 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10833833 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1369 - Berkeley-Waxahachie**  
 710 Ovilla Road  
 Waxahachie, TX  
 US 75167  
 Contact: Robert Beal  
 rbeal@transervice.com  
 T: (972)923-9928  
 F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)