




# OIL ANALYSIS REPORT

Sample Rating Trend

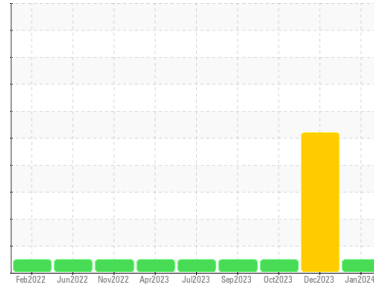

**NORMAL**



Machine Id  
**721054**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0098172</b>	GFL0098228	GFL0083898	
Sample Date	Client Info	<b>12 Jan 2024</b>	26 Dec 2023	02 Oct 2023	
Machine Age	hrs	Client Info	<b>7615</b>	7400	6916
Oil Age	hrs	Client Info	<b>1745</b>	2014	6916
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A	
Sample Status		<b>NORMAL</b>	SEVERE	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>71</b>	▲ 156	19
Chromium	ppm ASTM D5185m >20	<b>2</b>	8	<1
Nickel	ppm ASTM D5185m >4	<b>1</b>	3	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>6</b>	▲ 22	<1
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm ASTM D5185m >330	<b>1</b>	4	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>8</b>	5	11
Barium	ppm ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 100	<b>52</b>	58	59
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	2	<1
Magnesium	ppm ASTM D5185m 450	<b>854</b>	910	971
Calcium	ppm ASTM D5185m 3000	<b>981</b>	1014	1081
Phosphorus	ppm ASTM D5185m 1150	<b>1020</b>	956	1013
Zinc	ppm ASTM D5185m 1350	<b>1175</b>	1177	1230
Sulfur	ppm ASTM D5185m 4250	<b>2898</b>	2627	3152

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	9	4
Sodium	ppm ASTM D5185m >216	<b>4</b>	7	4
Potassium	ppm ASTM D5185m >20	<b>2</b>	3	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.8</b>	● 8.2	1.6
Nitration	Abs/cm *ASTM D7624 >20	<b>8.3</b>	25.4	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.0</b>	40.4	20.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.0</b>	52.9	13.3
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>8.9</b>	▲ 0.0	9.2







# OIL ANALYSIS REPORT

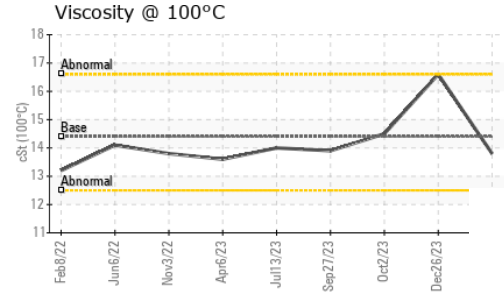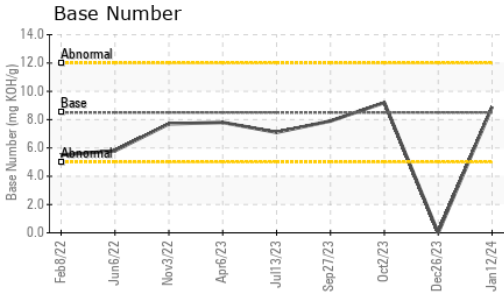

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.8</b>	▲ 16.6	14.5

## GRAPHS

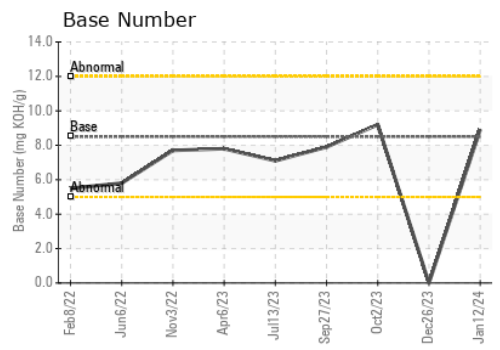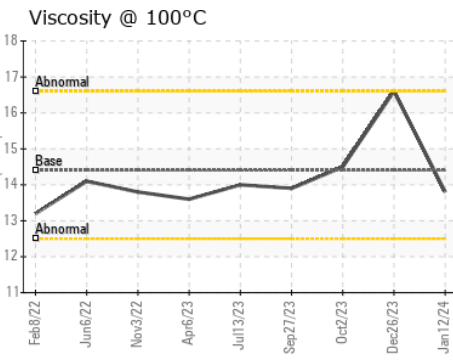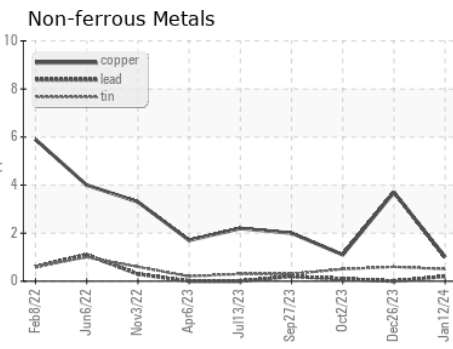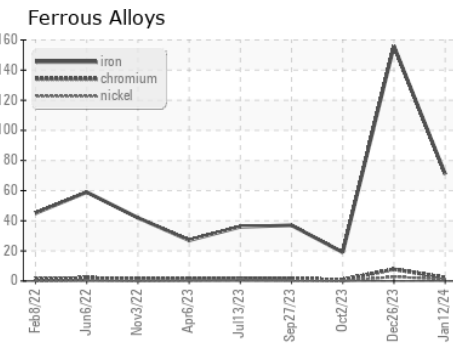

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098172 **Recieved** : 17 Jan 2024  
**Lab Number** : **06063337** **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10834719 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)