




# OIL ANALYSIS REPORT

Sample Rating Trend

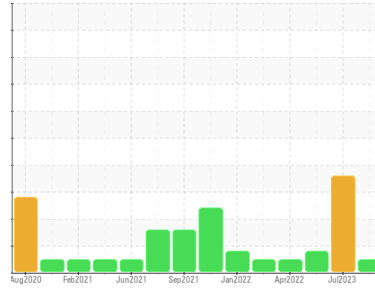

**NORMAL**



Machine Id  
**822023-120**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0098175</b>	GFL0083839	GFL0047839
Sample Date	Client Info	<b>15 Jan 2024</b>	20 Jul 2023	14 Jul 2022
Machine Age	hrs	<b>7916</b>	5541	5541
Oil Age	hrs	<b>7916</b>	5541	600
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed
Sample Status		<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>63</b>	▲ 114	51
Chromium	ppm ASTM D5185m >4	<b>2</b>	▲ 5	2
Nickel	ppm ASTM D5185m >2	<b>0</b>	2	<1
Titanium	ppm ASTM D5185m	<b>1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185m >25	<b>2</b>	17	2
Lead	ppm ASTM D5185m >45	<b>4</b>	44	2
Copper	ppm ASTM D5185m >85	<b>3</b>	34	2
Tin	ppm ASTM D5185m >4	<b>0</b>	5	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>11</b>	5	8
Barium	ppm ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm ASTM D5185m 60	<b>56</b>	67	60
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>961</b>	902	908
Calcium	ppm ASTM D5185m 1070	<b>1159</b>	1172	1144
Phosphorus	ppm ASTM D5185m 1150	<b>1087</b>	987	929
Zinc	ppm ASTM D5185m 1270	<b>1251</b>	1235	1192
Sulfur	ppm ASTM D5185m 2060	<b>3319</b>	2786	3271

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>5</b>	0	7
Sodium	ppm ASTM D5185m	<b>4</b>	2	5
Potassium	ppm ASTM D5185m >20	<b>3</b>	6	<1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>2.2</b>	▲ 5.1	▲ 3.5
Nitration	Abs/cm *ASTM D7624 >20	<b>7.4</b>	12.2	10.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.5</b>	28.6	26.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.6</b>	16.9	16.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.2</b>	▲ 3.9	7.2







# OIL ANALYSIS REPORT

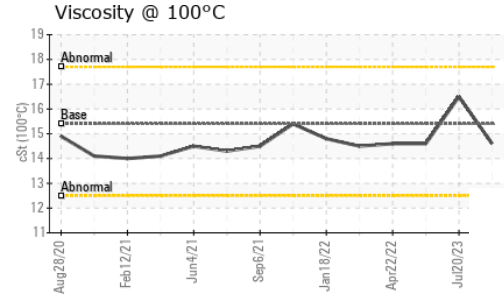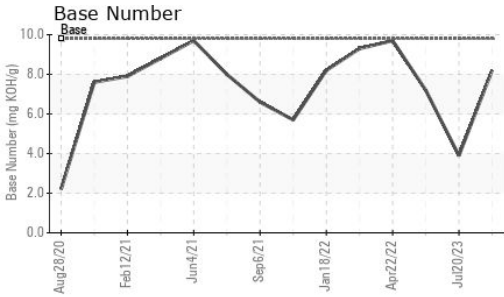

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	16.5	14.6

## GRAPHS

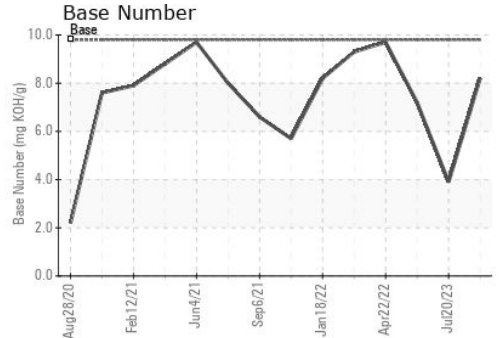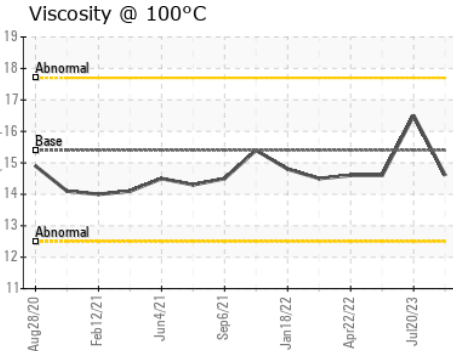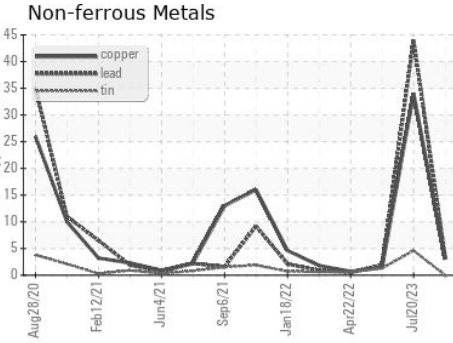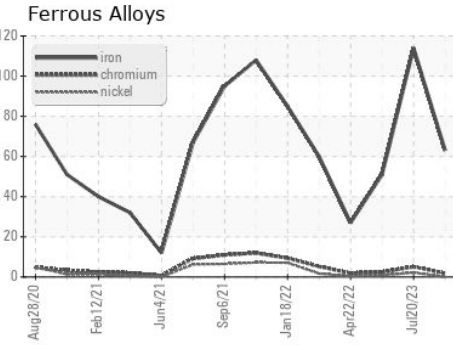

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098175 **Received** : 17 Jan 2024  
**Lab Number** : **06063475** **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10834857 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)