




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(413UA)**  
Machine Id  
**813012**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

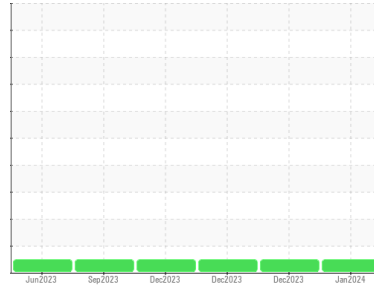

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0098176</b>	GFL0098207	GFL0098225
Sample Date	Client Info	<b>15 Jan 2024</b>	28 Dec 2023	13 Dec 2023
Machine Age	hrs	<b>3316</b>	3181	2432
Oil Age	hrs	<b>3316</b>	3181	2432
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>26</b>	4	14
Chromium	ppm ASTM D5185m >20	<b>1</b>	0	<1
Nickel	ppm ASTM D5185m >5	<b>0</b>	<1	1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>10</b>	<1	2
Lead	ppm ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >330	<b>1</b>	<1	5
Tin	ppm ASTM D5185m >15	<b>0</b>	0	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>9</b>	12	6
Barium	ppm ASTM D5185m 10	<b>0</b>	0	12
Molybdenum	ppm ASTM D5185m 100	<b>55</b>	56	60
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 450	<b>919</b>	949	930
Calcium	ppm ASTM D5185m 3000	<b>1095</b>	1102	1087
Phosphorus	ppm ASTM D5185m 1150	<b>1031</b>	1020	941
Zinc	ppm ASTM D5185m 1350	<b>1205</b>	1237	1209
Sulfur	ppm ASTM D5185m 4250	<b>3271</b>	3404	3129

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	3	4
Sodium	ppm ASTM D5185m >216	<b>4</b>	<1	0
Potassium	ppm ASTM D5185m >20	<b>10</b>	1	2

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.8</b>	0.2	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>8.5</b>	5.9	8.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.9</b>	18.0	19.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.6</b>	13.5	15.2
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>8.5</b>	8.7	7.2







# OIL ANALYSIS REPORT

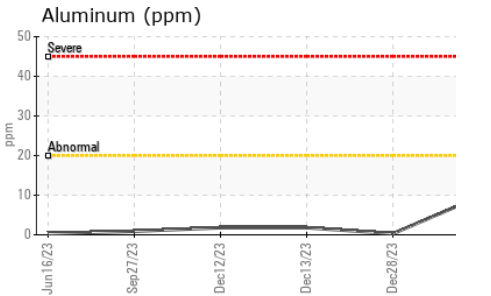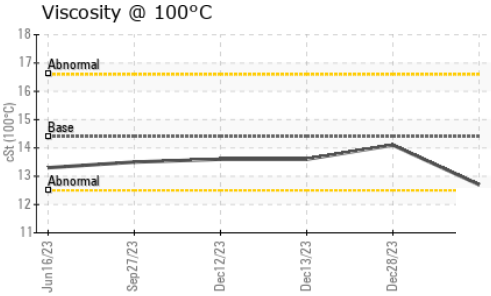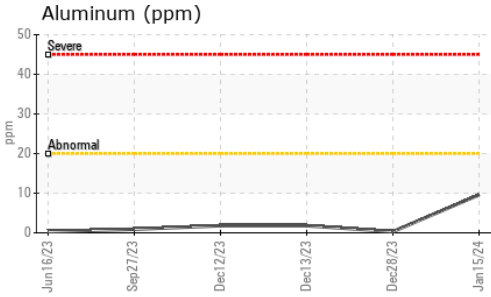

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.7	14.1

## GRAPHS

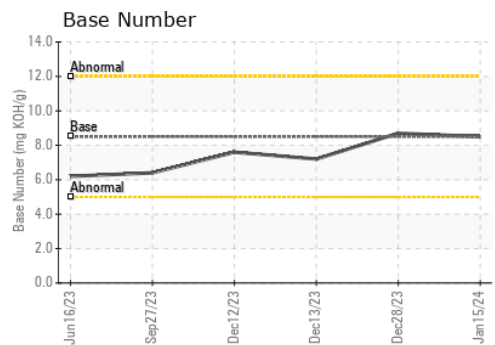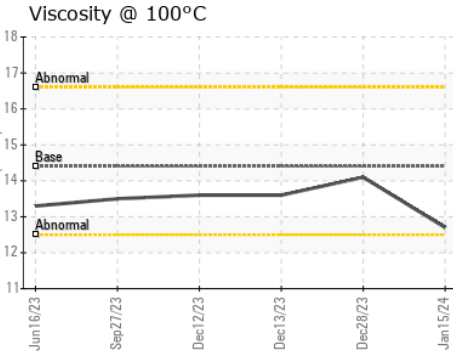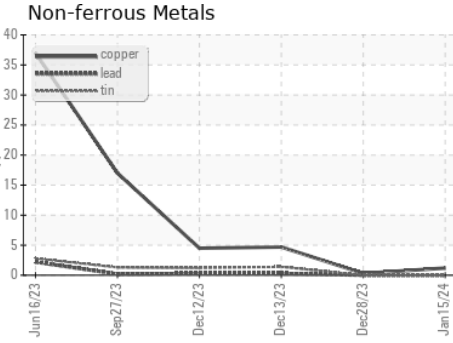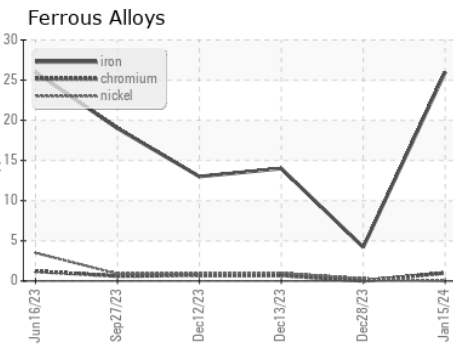

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098176 **Received** : 17 Jan 2024  
**Lab Number** : 06063478 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10834860 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: