




Machine Id  
**BLENDER 3**  
 Component  
**Gearbox**  
 Fluid  
**MOBIL SHC 630 (15 GAL)**

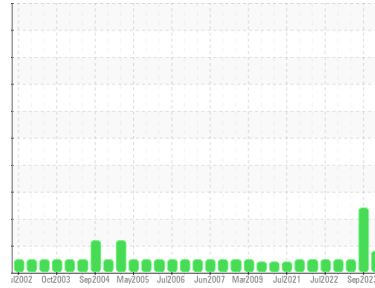

## DIAGNOSIS

**Recommendation**  
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0113566</b>	PCA0103585	PCA0094145
Sample Date	Client Info		<b>15 Jan 2024</b>	29 Sep 2023	20 Jul 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	ATTENTION	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>3</b>	4	1
Chromium	ppm	ASTM D5185m >15	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	2	<1
Lead	ppm	ASTM D5185m >100	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >200	<b>0</b>	0	0
Tin	ppm	ASTM D5185m >25	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>1</b>	0	0
Calcium	ppm	ASTM D5185m	<b>3</b>	1	0
Phosphorus	ppm	ASTM D5185m	<b>451</b>	438	493
Zinc	ppm	ASTM D5185m	<b>0</b>	<1	0
Sulfur	ppm	ASTM D5185m	<b>686</b>	791	896

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>20</b>	22	21
Sodium	ppm	ASTM D5185m	<b>0</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1

## FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>▲ 14536</b>	6506	503
Particles >6µm	ASTM D7647	>2500	<b>1160</b>	▲ 2024	87
Particles >14µm	ASTM D7647	>640	<b>50</b>	▲ 589	6
Particles >21µm	ASTM D7647	>160	<b>14</b>	▲ 396	3
Particles >38µm	ASTM D7647	>40	<b>1</b>	▲ 115	1
Particles >71µm	ASTM D7647	>10	<b>0</b>	▲ 14	0
Oil Cleanliness	ISO 4406 (c)	>20/18/16	<b>▲ 21/17/13</b>	▲ 20/18/16	16/14/10

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.48</b>	0.54	0.54

# OIL ANALYSIS REPORT


## Particle Trend

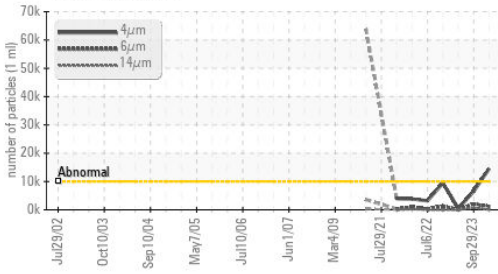


## Particle Trend

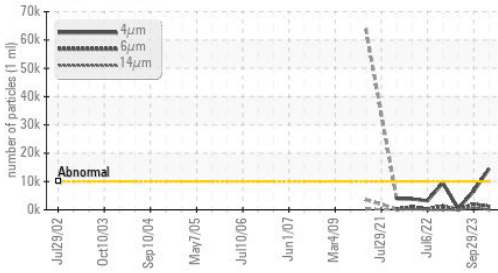

## Acid Number

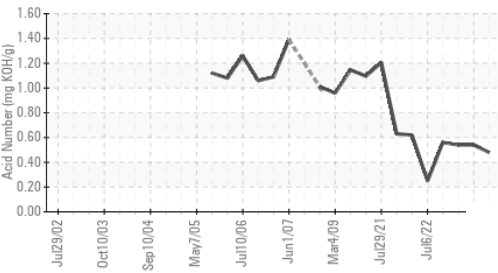


## Viscosity @ 40°C

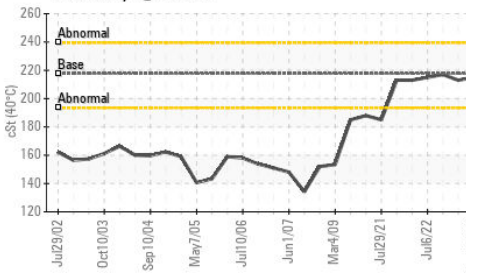

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	217.7	216	215

## SAMPLE IMAGES

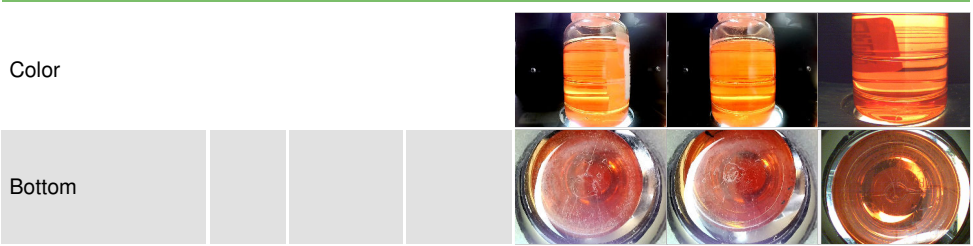


## GRAPHS


### Ferrous Alloys

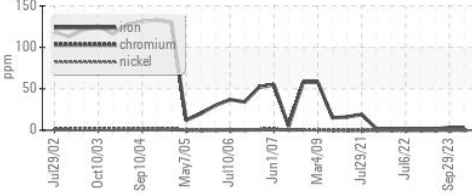


### Non-ferrous Metals

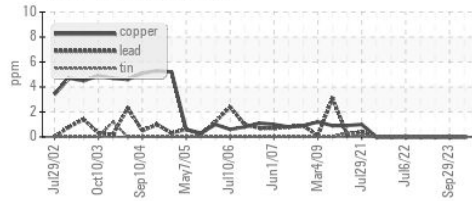


### Viscosity @ 40°C

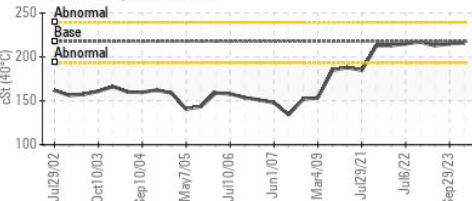

### Particle Count

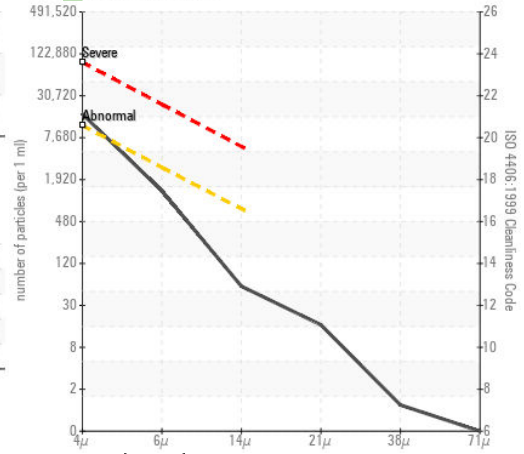

### Acid Number

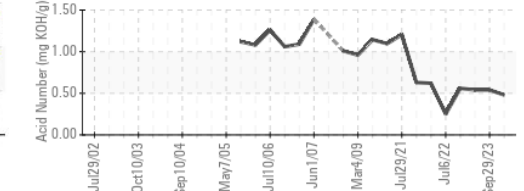

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0113566 **Received** : 18 Jan 2024  
**Lab Number** : 06064324 **Diagnosed** : 21 Jan 2024  
**Unique Number** : 10835706 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**KraftHeinz - New Ulm - Plant 8302**  
 2525 S BRIDGE STREET  
 NEW ULM, MN  
 US 56073  
 Contact: RYAN SCHMID  
 ryan.schmid@kraftheinz.com  
 T: (507)568-0338  
 F: (507)354-7927

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)