


OIL ANALYSIS REPORT

Sample Rating Trend

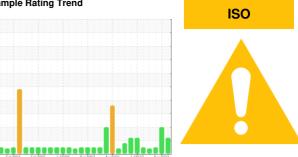

BLENDER 9

Component Gearbox

MOBIL SHC 630 (15 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

12002 Feb.2004 Feb.2005 Jul2006 Sep.2007 Ap.2021 Jul2022 Sep.2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0113560	PCA0103591	PCA0094151
Sample Date		Client Info		15 Jan 2024	29 Sep 2023	02 Aug 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
CONTAMINATI	ON	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	20	3	20
Chromium	ppm	ASTM D5185m	>15	<1	<1	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		<1	2	<1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm		>200	0	<1	<1
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		7	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		1	0	1
Magnesium	ppm	ASTM D5185m		2	<1	<1
Calcium	ppm	ASTM D5185m		4	<1	<1
Phosphorus	ppm	ASTM D5185m		451 <1	465	494
Zinc	ppm	ASTM D5185m			<1	5
Sulfur	ppm	ASTM D5185m		4306	476	5397
CONTAMINAN		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	20	28	22
Sodium Potassium	ppm	ASTM D5185m ASTM D5185m	> 20	<1 1	1 <1	1 <1
	ppm		limit/base			
FLUID CLEANL	IINE 33			current	history1	history2 576
Particles >4µm		ASTM D7647 ASTM D7647	>10000	▲ 45169 ▲ 7207	▲ 47967 ▲ 14092	
Particles >6µm Particles >14µm		ASTM D7647 ASTM D7647	>2500 >640	△ 7397 505	▲ 14083 ▲ 1739	9
Particles >14μm		ASTM D7647	>160	115	▲ 552	2
Particles >38µm		ASTM D7647	>40	4	28	0
Particles >30µm		ASTM D7647	>40	1	1	0
Oil Cleanliness		ISO 4406 (c)	>20/18/16	△ 23/20/16	23/21/18	16/14/10
	ATION	` '				
FLUID DEGRAD	AHUN	method	limit/base	current	history1	history2

0.69


Acid Number (AN)

mg KOH/g ASTM D8045

0.67



OIL ANALYSIS REPORT

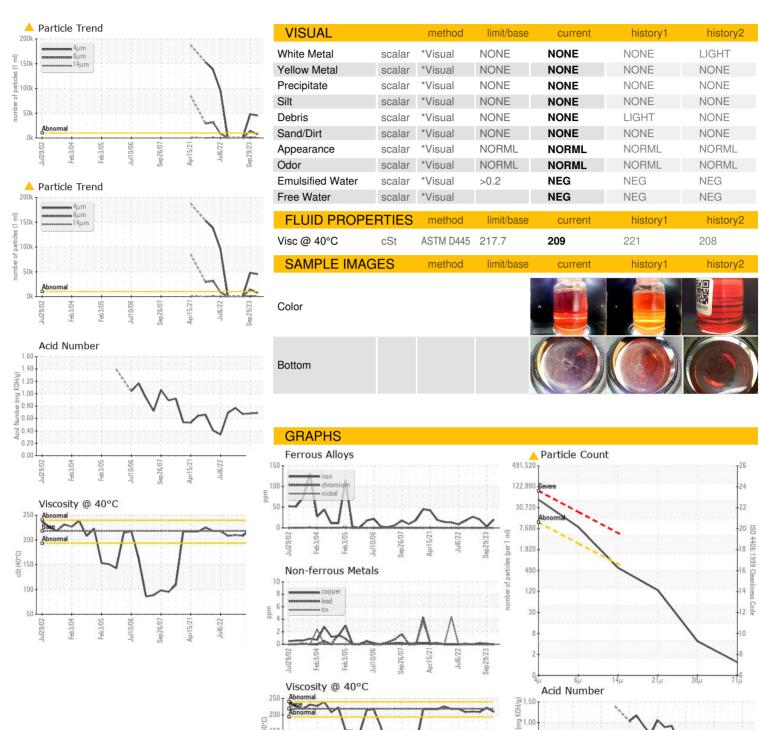





Certificate L2367

Laboratory

Sample No. Lab Number

Unique Number

: 06064331 : 10835713

200 CSt (40°C)

100

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0113560 Recieved Diagnosed

: 21 Jan 2024 Diagnostician : Don Baldridge

Ê 0 50

: 18 Jan 2024

Test Package : IND 2 (Additional Tests: PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KraftHeinz - New Ulm - Plant 8302

2525 S BRIDGE STREET NEW ULM, MN

US 56073 Contact: RYAN SCHMID

ryan.schmid@kraftheinz.com T: (507)568-0338

Submitted By: RYAN SCHMID

F: (507)354-7927