




OIL ANALYSIS REPORT

Sample Rating Trend

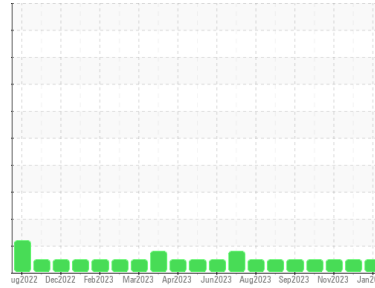

NORMAL



Area
(DUW950)
Machine Id
10630
Component
Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0107235	GFL0107210	GFL0101265
Sample Date	Client Info	12 Jan 2024	18 Dec 2023	29 Nov 2023
Machine Age	hrs	6666	6511	6390
Oil Age	hrs	739	584	463
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >160	37	32	33
Chromium	ppm ASTM D5185m >5	<1	<1	<1
Nickel	ppm ASTM D5185m >5	0	<1	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >5	0	0	0
Aluminum	ppm ASTM D5185m >50	11	13	11
Lead	ppm ASTM D5185m >50	3	3	2
Copper	ppm ASTM D5185m >225	16	14	14
Tin	ppm ASTM D5185m >10	<1	1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	12	9	9
Barium	ppm ASTM D5185m	3	0	0
Molybdenum	ppm ASTM D5185m	2	<1	2
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m	14	17	15
Calcium	ppm ASTM D5185m	118	124	134
Phosphorus	ppm ASTM D5185m	302	299	312
Zinc	ppm ASTM D5185m	214	252	265
Sulfur	ppm ASTM D5185m	1303	1249	1262

CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	5	5	5
Sodium	ppm ASTM D5185m	1	8	8
Potassium	ppm ASTM D5185m >20	2	2	0

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual NONE	NONE	NONE	NONE
Precipitate	scalar *Visual NONE	NONE	NONE	NONE
Silt	scalar *Visual NONE	NONE	NONE	NONE
Debris	scalar *Visual NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar *Visual NONE	NONE	NONE	NONE
Appearance	scalar *Visual NORML	NORML	NORML	NORML
Odor	scalar *Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual >0.1	NEG	NEG	NEG
Free Water	scalar *Visual	NEG	NEG	NEG






OIL ANALYSIS REPORT

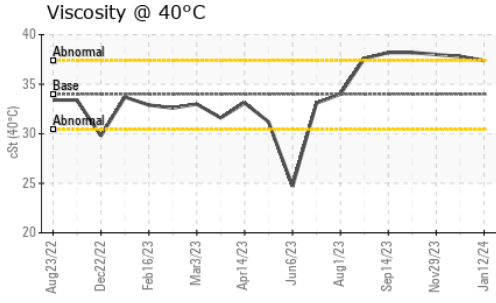

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	34	37.4	37.8	38.0

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

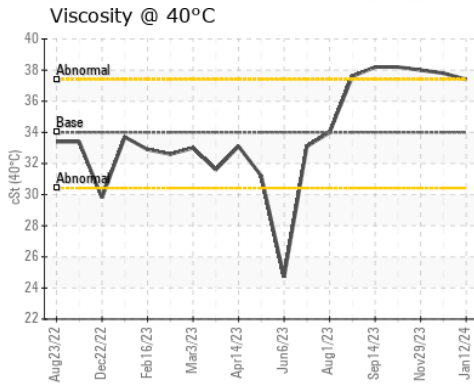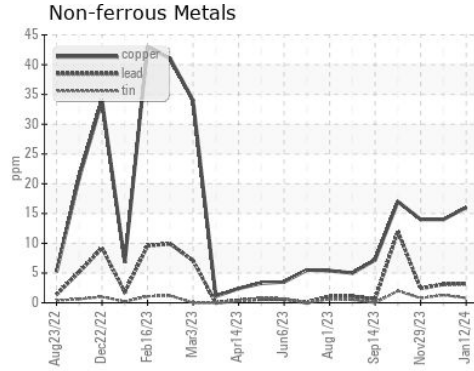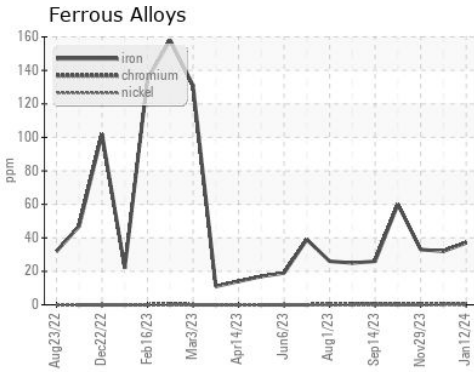

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0107235 **Received** : 18 Jan 2024
Lab Number : 06064638 **Diagnosed** : 21 Jan 2024
Unique Number : 10836020 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: