




OIL ANALYSIS REPORT

Sample Rating Trend

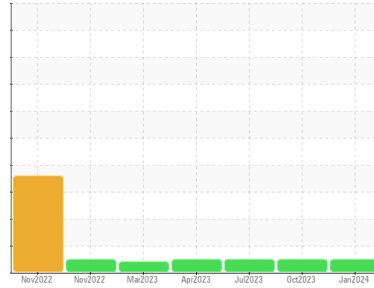

NORMAL



Area
(GAC712)
Machine Id
413036
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0103410	GFL0083654	GFL0074604	
Sample Date	Client Info	15 Jan 2024	12 Oct 2023	07 Jul 2023	
Machine Age	hrs	Client Info	3629	3105	2470
Oil Age	hrs	Client Info	562	38	538
Oil Changed	Client Info	Changed	Not Changd	Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >120	9	2	11
Chromium	ppm	ASTM D5185m >20	<1	0	<1
Nickel	ppm	ASTM D5185m >15	2	<1	1
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	0	2
Lead	ppm	ASTM D5185m >40	<1	<1	0
Copper	ppm	ASTM D5185m >330	3	<1	4
Tin	ppm	ASTM D5185m >15	<1	<1	1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	6	12	4
Barium	ppm	ASTM D5185m 0	0	2	0
Molybdenum	ppm	ASTM D5185m 60	62	61	65
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	973	795	849
Calcium	ppm	ASTM D5185m 1070	1021	969	1046
Phosphorus	ppm	ASTM D5185m 1150	1040	923	929
Zinc	ppm	ASTM D5185m 1270	1227	1040	1112
Sulfur	ppm	ASTM D5185m 2060	3006	2843	2834

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	5	2	4
Sodium	ppm	ASTM D5185m	4	0	1
Potassium	ppm	ASTM D5185m >20	2	2	5

INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >4	0.3	0.1	0.3
Nitration	Abs/cm	*ASTM D7624 >20	7.1	4.5	7.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.1	16.6	18.6

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.2	12.4	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.4	8.4	7.2







OIL ANALYSIS REPORT

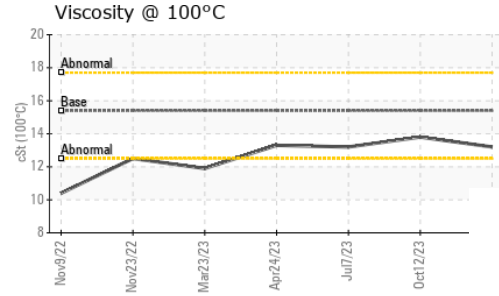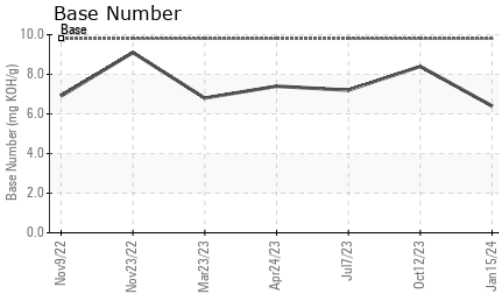

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	13.8

GRAPHS

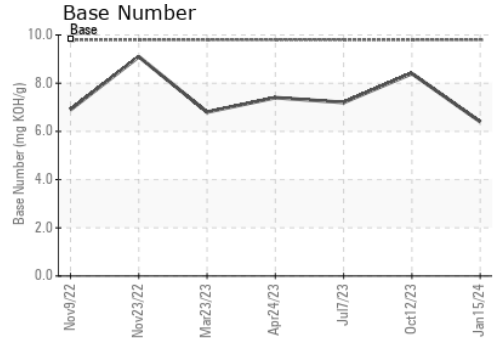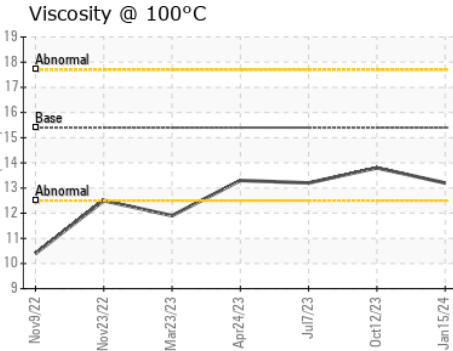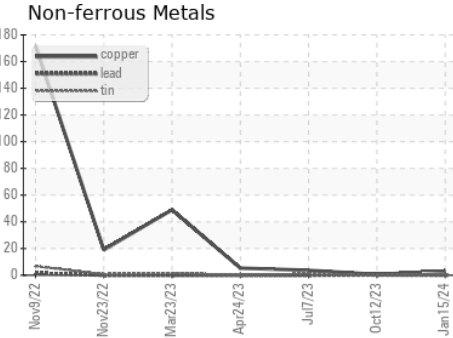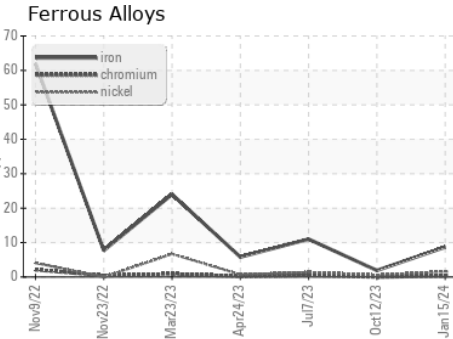

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0103410 Recieved : 18 Jan 2024
 Lab Number : 06064817 Diagnosed : 19 Jan 2024
 Unique Number : 10836199 Diagnostician : Wes Davis
 Test Package : FLEET

GFL Environmental - 095 - Atlanta West
 2699 Cochran Industrial Blvd
 Douglasville, GA
 US 30127-1332
 Contact: Darrell Welch
 darrell.welch@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)