




OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



Area
(BC16368)
Machine Id
840M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

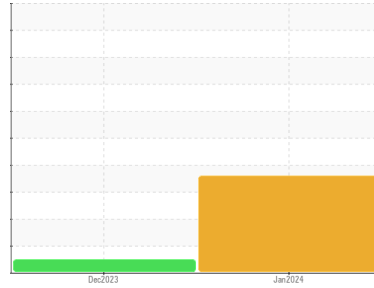

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Light fuel dilution occurring. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0108840	GFL0105699	---
Sample Date	Client Info	16 Jan 2024	20 Dec 2023	---
Machine Age	hrs	10642	10446	---
Oil Age	hrs	10446	7361	---
Oil Changed	Client Info	Changed	Not Changd	---
Sample Status		ABNORMAL	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>80	80	0	---
Chromium	ppm	ASTM D5185m	>5	2	0	---
Nickel	ppm	ASTM D5185m	>2	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>30	6	<1	---
Lead	ppm	ASTM D5185m	>30	<1	0	---
Copper	ppm	ASTM D5185m	>150	71	<1	---
Tin	ppm	ASTM D5185m	>5	1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	36	4	---
Barium	ppm	ASTM D5185m	0	9	<1	---
Molybdenum	ppm	ASTM D5185m	60	44	59	---
Manganese	ppm	ASTM D5185m	0	4	<1	---
Magnesium	ppm	ASTM D5185m	1010	564	938	---
Calcium	ppm	ASTM D5185m	1070	1720	1035	---
Phosphorus	ppm	ASTM D5185m	1150	826	1106	---
Zinc	ppm	ASTM D5185m	1270	997	1284	---
Sulfur	ppm	ASTM D5185m	2060	2436	3204	---

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>20	36	6	---
Sodium	ppm	ASTM D5185m		4	2	---
Potassium	ppm	ASTM D5185m	>20	1	<1	---
Fuel	%	ASTM D3524	>5	2.1	<1.0	---

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	1	0	---
Nitration	Abs/cm	*ASTM D7624	>20	9.9	4.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	17.2	---


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.9	12.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.7	9.1	---




OIL ANALYSIS REPORT


▲ Silicon (ppm)

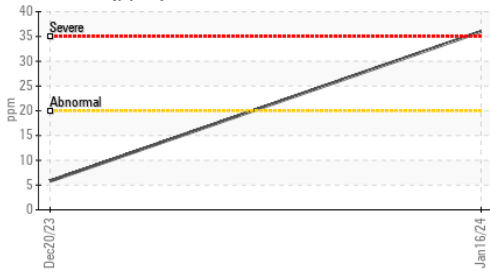


▲ Aluminum (ppm)

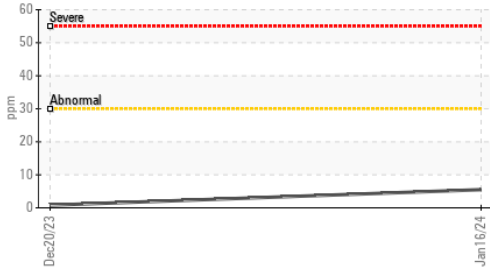


▲ Fuel Dilution

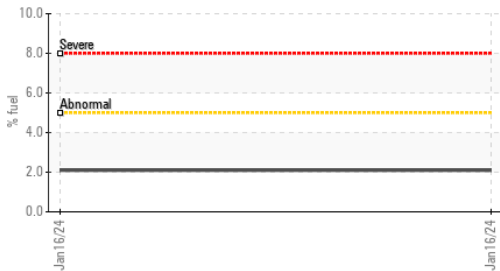

▲ Fuel Dilution

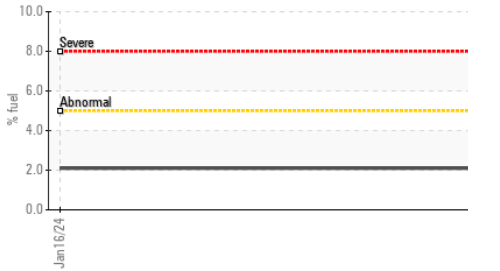

Base Number

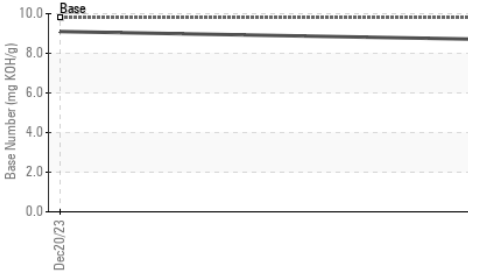


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.6	14.8

GRAPHS


Ferrous Alloys

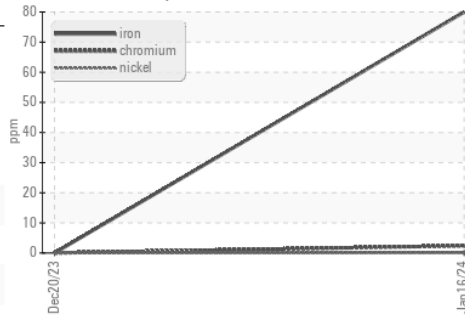


Non-ferrous Metals

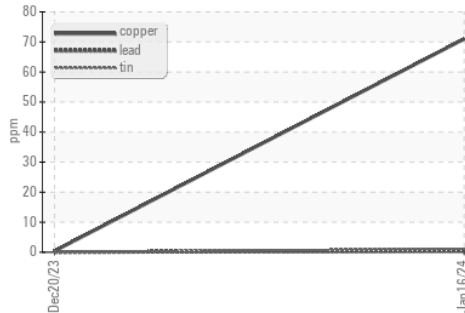

▲ Viscosity @ 100°C

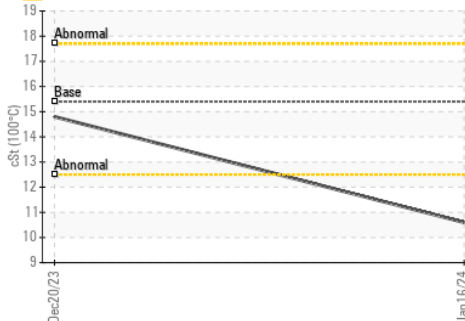

Base Number

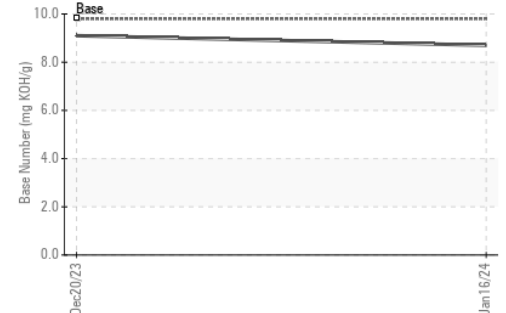

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0108840 **Received** : 18 Jan 2024
Lab Number : 06064862 **Diagnosed** : 24 Jan 2024
Unique Number : 10836244 **Diagnostician** : Angela Borella
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)