

OIL ANALYSIS REPORT

Sample Rating Trend



4000 GAL TANK

Component Hydraulic System Fluid PETRO CANADA HYDREX AW 68 (4000 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


L)				Jan2024		
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0052528		
Sample Date		Client Info		12 Jan 2024		
Machine Age	hrs	Client Info		0		
Dil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINAT	ΓION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Fitanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	2		
_ead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>75	0		
Tin	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm		0	<1		
Volybdenum		ASTM D5185m	0	<1		
	ppm	ASTM D5185m		0		
Manganese	ppm		0	6		
Magnesium	ppm	ASTM D5185m				
	ppm	ASTM D5185m	50	64		
Phosphorus	ppm	ASTM D5185m	330	402		
Zinc	ppm	ASTM D5185m	430	450		
Sulfur	ppm	ASTM D5185m	760	945		
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEAN	LINESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1517		
Particles >6µm		ASTM D7647	>1300	375		
Particles >14µm		ASTM D7647	>160	20		
Particles >21µm		ASTM D7647	>40	4		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Dil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/11		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.60	0.36		
13:38) Bev: 1	5 - 5				tion: IOHN HO	


Report Id: JONRIC [WUSCAR] 06065007 (Generated: 01/22/2024 12:03:38) Rev: 1


Contact/Location: JOHN HOPPER - JONRIC




OIL ANALYSIS REPORT

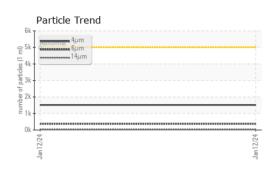

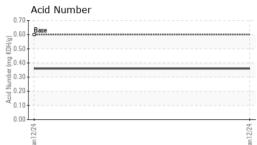

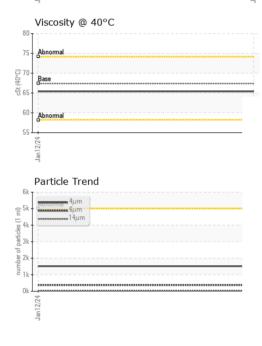

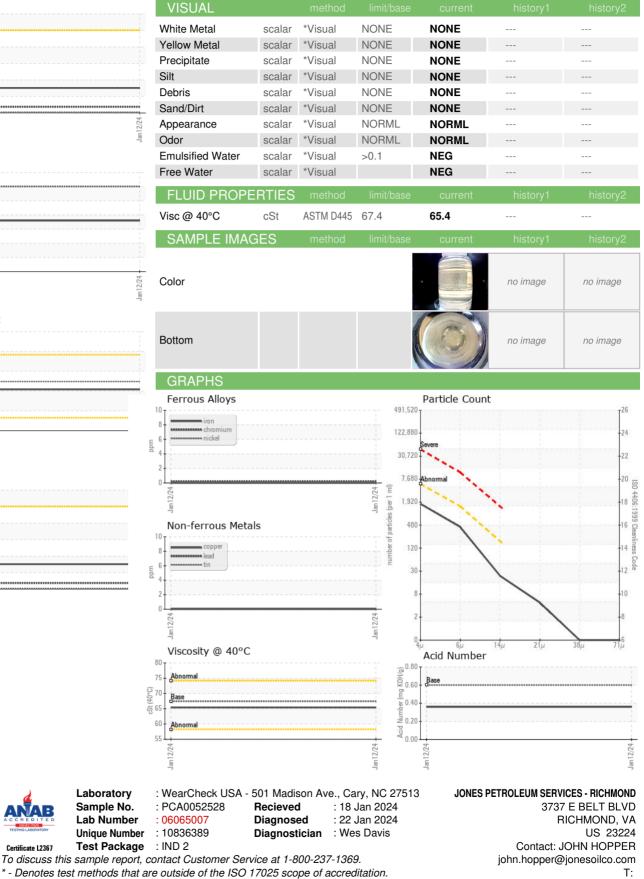

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Laboratory

Sample No.

Lab Number

Unique Number

Contact/Location: JOHN HOPPER - JONRIC

F: