

OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

🔺 Wear

The nickel level is abnormal. All other component wear rates are normal.

Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating possible ingress of seal material.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

N SHP 15W40 (-	GAL)	_		Jan2024		
SAMPLE INFOR		method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0102128		
Sample Date		Client Info		08 Jan 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		600		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	79		
Chromium	ppm	ASTM D5185m		2		
Nickel	ppm	ASTM D5185m		<u> </u>		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m		3		
Lead	ppm	ASTM D5185m		2		
Copper	ppm	ASTM D5185m		65		
Tin		ASTM D5185m		3		
Vanadium	ppm ppm	ASTM D5185m	>10	3 <1		
Cadmium		ASTM D5185m		0		
	ppm			-		
ADDITIVES		mothod	limit/base	current		history
		method	IIIIIVDase	Guirent	history1	history2
	ppm	ASTM D5185m	0	25		
Boron	ppm ppm					
Boron Barium		ASTM D5185m	0	25		
Boron Barium Molybdenum	ppm	ASTM D5185m ASTM D5185m	0 0 60	25 <1		
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60	25 <1 57		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	25 <1 57 3		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010	25 <1 57 3 619		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070	25 <1 57 3 619 1254	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150	25 <1 57 3 619 1254 831	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	25 <1 57 3 619 1254 831 1083	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060	25 <1 57 3 619 1254 831 1083 2599		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	0 0 60 1010 1070 1150 1270 2060 limit/base	25 <1 57 3 619 1254 831 1083 2599 current		 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060 limit/base	25 <1 57 3 619 1254 831 1083 2599 current ▲ 51	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm yts	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >25	25 <1 57 3 619 1254 831 1083 2599 <u>current</u> ▲ 51 6	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm yts	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >25 >20	25 <1 57 3 619 1254 831 1083 2599 current ≤ 51 6 3	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm yts	ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >25 >20 >20 >3.0	25 <1 57 3 619 1254 831 1083 2599 <u>current</u> ▲ 51 6 3 0.5	 history1 	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm yTTS ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >25 >20 >20 >3.0 limit/base	25 <1 57 3 619 1254 831 1083 2599 current ▲ 51 6 3 0.5 current	 history1 history1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel	ppm ppm ppm ppm ppm ppm ppm ppm yTS	ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >25 >20 >20 >3.0 limit/base	25 <1 57 3 619 1254 831 1083 2599 current ▲ 51 6 3 0.5 current 1	 history1 history1 	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	<pre>ppm ppm ppm ppm ppm ppm ppm ppm ppm yTTS ppm ppm ppm %</pre>	ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060 limit/base >25 >20 >3.0 limit/base >4 >20	25 <1 57 3 619 1254 831 1083 2599 current ▲ 51 6 3 0.5 current 1 10.7	history1 history1	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	<pre>ppm ppm ppm ppm ppm ppm ppm ppm ppm yTTS ppm ppm ppm %</pre>	ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >25 >20 >20 >3.0 limit/base >4 >20 >4 >20	25 <1 57 3 619 1254 831 1083 2599 current ▲ 51 6 3 0.5 current 1 10.7 23.6	history1 history1 history1	 history2 history2 history2



OIL ANALYSIS REPORT

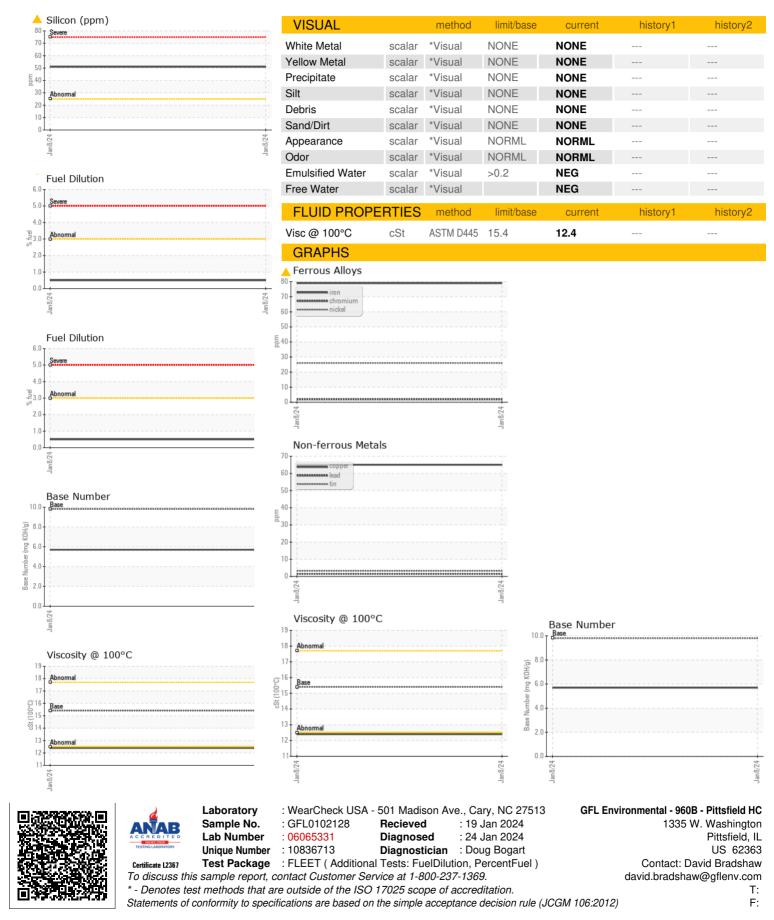

Submitted By: See also GFL960B, 960C, 960D - David Bradshaw