




OIL ANALYSIS REPORT

Sample Rating Trend

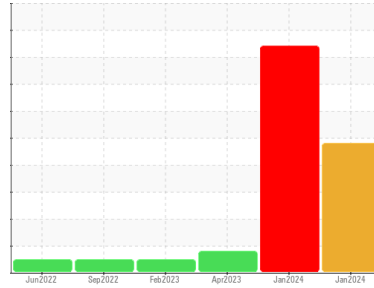

GLYCOL



Area
(41421UA)
Machine Id
820047

Component
Diesel Engine
Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Test for glycol is positive. There is a moderate concentration of glycol present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0108317	GFL0098236	GFL0061482
Sample Date	Client Info	16 Jan 2024	06 Jan 2024	26 Apr 2023
Machine Age	mls	112090	111465	0
Oil Age	mls	112090	111465	0
Oil Changed	Client Info	Not Chngd	N/A	N/A
Sample Status		ABNORMAL	SEVERE	MARGINAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	11	36	▲ 71
Chromium	ppm ASTM D5185m >20	<1	1	3
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m	0	<1	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	4	15	18
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	4	14	1
Tin	ppm ASTM D5185m >15	0	<1	0
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	8	9	9
Barium	ppm ASTM D5185m 0	0	<1	0
Molybdenum	ppm ASTM D5185m 60	99	217	67
Manganese	ppm ASTM D5185m 0	<1	1	2
Magnesium	ppm ASTM D5185m 1010	1043	899	997
Calcium	ppm ASTM D5185m 1070	1141	1038	1215
Phosphorus	ppm ASTM D5185m 1150	1111	1018	1088
Zinc	ppm ASTM D5185m 1270	1361	1223	1366
Sulfur	ppm ASTM D5185m 2060	3548	3030	3750

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	6	12	7
Sodium	ppm ASTM D5185m	▲ 52	▲ 216	6
Potassium	ppm ASTM D5185m >20	▲ 363	▲ 1613	11
Glycol	% *ASTM D2982	▲ 0.06	◆ 0.20	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.5	0.8
Nitration	Abs/cm *ASTM D7624 >20	5.8	8.9	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	18.3	21.1	20.0


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.2	14.6	17.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.3	10.0	6.6




OIL ANALYSIS REPORT

▲ Glycol Contamination

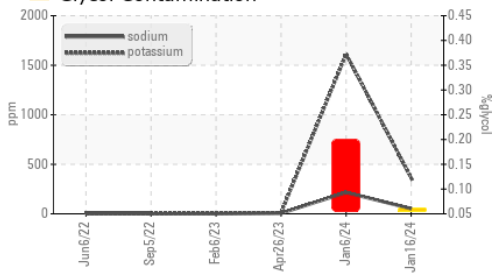

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


Base Number

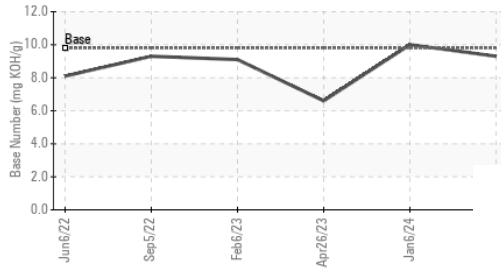


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	13.8

GRAPHS


Ferrous Alloys

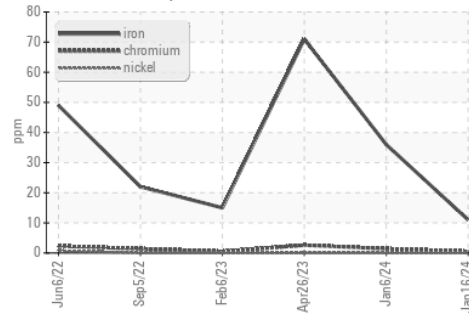


Viscosity @ 100°C

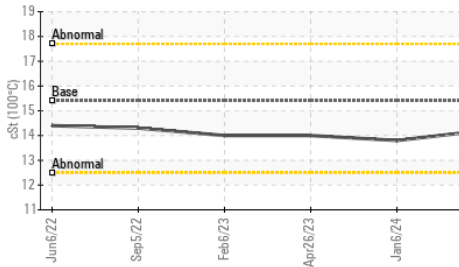


Non-ferrous Metals

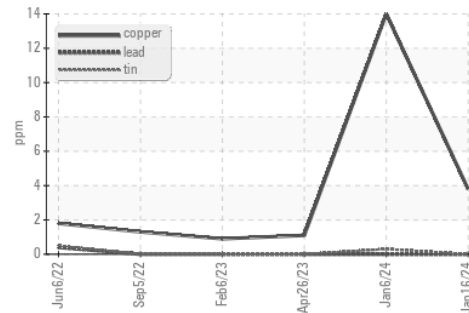

Viscosity @ 100°C

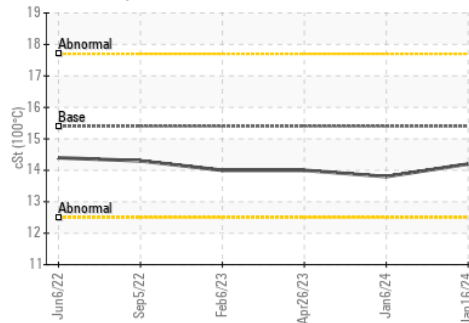

Base Number

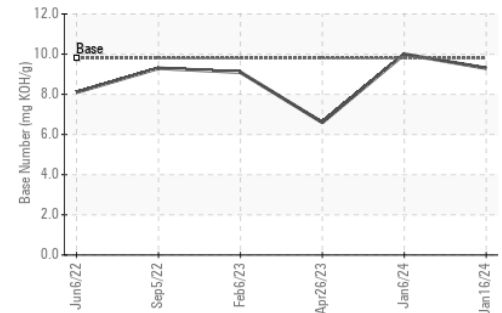

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0108317 **Received** : 19 Jan 2024
Lab Number : 06065391 **Diagnosed** : 01 Feb 2024
Unique Number : 10836773 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: